

2-Port RS-232/422/485 universal PCI card with 3KV isolation protection

Note: This Quick Guide is designed for wiring version of RS485 (2-wire/4-wire).

Introduction

This universal PCI card which complies with the industrial standard. With this standard, this card can be assembled into a standard or even small-sized desktop case. The design of the multiple ports (RS-232/422/485) allows the PC connecting to other serial devices easily, and the maximum data transmission rate is up to 921.6Kbps. Besides, the built-in 15KV ESD and 3KV optical isolation protection prevent the damage from lighting or high potential voltage. For more information, please refer to this quick installation guide.

Specification


Ports	2xRS-232/422/485
Connector	8-pin RJ45
FIFO	128 bytes
ESD Protection	15 KV ESD, 3KV isolation
Serial Communication Speed	300bps ~ 921.6Kbps
Bus Interface	Universal PCI
Operating Temperature	0~55°C
Operating Humidity	5~95% RH
Dimensions(LxWxH)	120 x 64mm
Regulatory Approvals	FCC/CE

Package contents

- Universal PCI card x 1
- Low profile metal bracket x 1
- RJ45 to DB9 male cable (50cm) x2
- CD (Driver & Manual) x 1




Product overview and dimensions

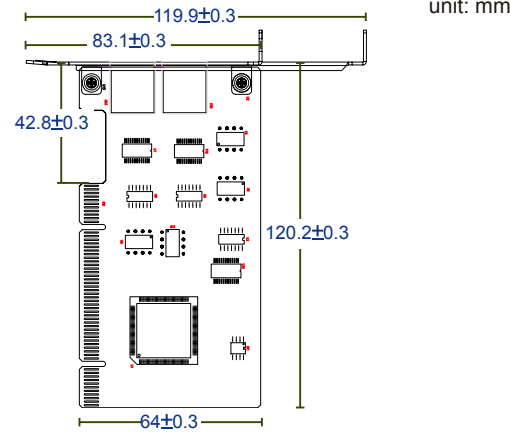


Cable diagram

RJ-45 to RS-232/422/485



Jumper setting

To setup the jumpers, please refer to the table below.




	RS-232	RS-422 / RS-485 (4-wire)	RS-485 (2-wire)
	JP1	JP1	JP1
Port 1	1	1	3
Port 2	2	2	4

Pin assignments

Pin	Signal	Pin	Signal
1	DSR	5	RxD
2	RTS	6	DCD
3	GND	7	CTS
4	TxD	8	DTR

DB9



Pin	RS-232	RS-422	RS-485 (4-wire)	RS-485 (2-wire)
1	DCD	TxD-(A)	TxD-(A)	Data-(A)
2	RxD	---	---	---
3	TxD	---	---	---
4	DTR	TxD+(B)	TxD+(B)	Data+(B)
5	GND	GND	GND	---
6	DSR	RxD-(A)	RxD-(A)	---
7	RTS	RxD+(B)	RxD+(B)	---
8	CTS	---	---	---
9	---	---	---	---

Note: Please loop the pin1 and pin6, pin4 and 7 when using RS-485 (2-wire).

Software installation

Note: This serial card must be plugged before installing the driver.

For Windows 2003/XP:

1. Insert the installation CD into the CD/DVD-ROM.
2. Select **Install from a list or specific location (Advanced)**.
3. Select **Search for the best driver in these locations**, and then tick the **Include this location in the search** checkbox. After that, click the **Browse** button to navigate the installation CD path as **Software\Windows XP-2003**.
4. Click **Continue Anyway** to skip the warning message.
5. The installation wizard will be started after the PCIe card has been detected. Please follow the on-screen instructions to finish the installation.
6. When the installation has been completed, open the computer's **Device Manager (Control Panel\System Properties\Hardware\Device Manager)**. If the installation is failed, a question mark or exclamation point will appear on the screen. Examine the **Even Log** as the first step to determine the problem.

For Windows 7:

1. Insert the installation CD in to the CD/DVD-ROM.
2. Highlight the exclamation point in **Other devices** item, and then right click the mouse to select **Update Driver Software from Device Management**.
3. Select **Browse my computer for driver software**.
4. Click the **Browse** button to navigate the installation CD path as **Software\Windows Win7** folder. (**Note:** tick **Include subfolders** if necessary)
5. Click **Install this driver software anyway** to continue if the **Windows Security** windows appears.
6. The installation wizard will be started after the PCIe card has been detected. Please follow the on-screen instructions to finish the installation.
7. When the installation has been completed, open the **Computer Management** window. If the installation is failed, a question mark or exclamation point will appear on the screen. Examine the **Even Log** as the first step to determine the problem.