


# ENR-1000

## 4-Channel Mini Standalone NVR




- Manage up to 4 IP cameras
- Support H.264 formats up to 2-Megapixel resolution
- Live view with 1, 4 window layouts
- PTZ and speed control, preset points and tours, mouse PTZ
- HDD Bay for 2 SATA disks (total up to 6 TB)
- Maximum total recording frame rate 120 fps
- Scheduled, event triggered and manual recording
- Time and event based search
- Playback with 1/2x-1x-32x speeds with AVI video export function
- 4-channel synchronized playback
- Event management with motion detection and DI/DO
- Built-in DHCP server support
- HDMI Local display
- Compact Design

### PHOTO INDICATION

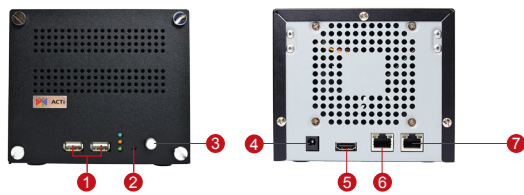

- |                      |             |
|----------------------|-------------|
| 1 USB 2.0 Ports      | 5 HDMI Port |
| 2 Reset Button       | 6 LAN1      |
| 3 Power Button       | 7 LAN2      |
| 4 DC 12V power input |             |


### DIMENSION DIAGRAM

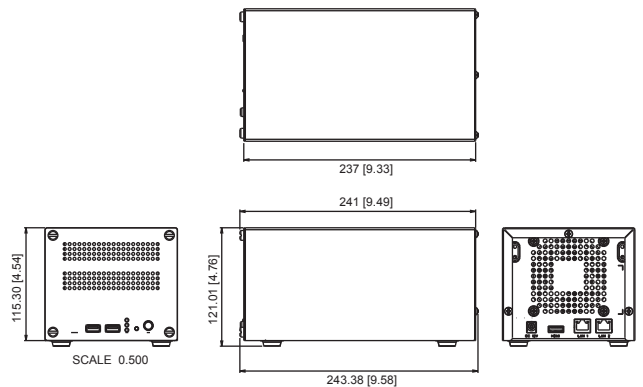

Unit: mm [inch]

### SOLUTION ARCHITECTURE

#### Standalone NVR

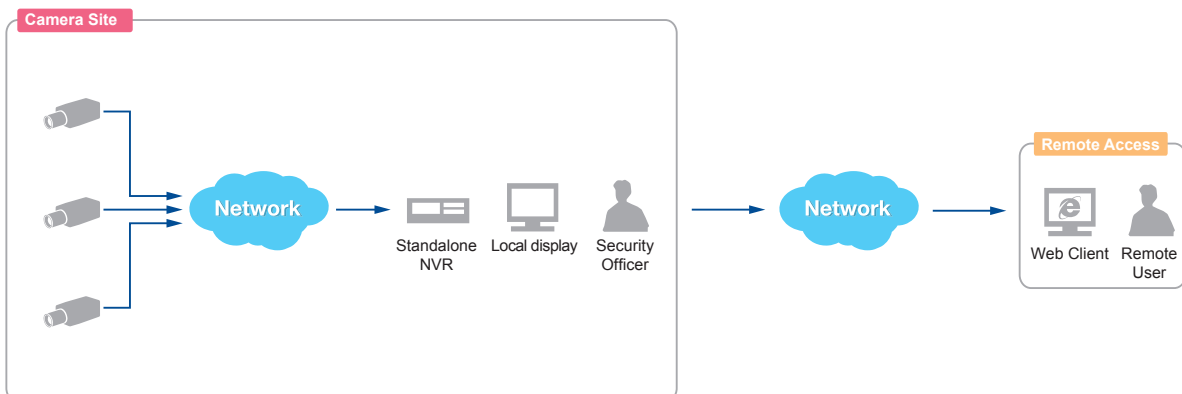

Remote User: Administrator / Supervisor / Manager / Security Officer

**ENR-1000****PRODUCT SPECIFICATION****ENR-1000****• General**

Full Name	ACTi Standalone Network Video Recorder ENR-1000
Maximum Number of Clients	2
Maximum Number of Cameras	4
Compression	H.264
Maximum display resolution	1920X1080

**• Live View**

Display Layout Mode	1, 4
Layout Tour (Auto Patrol)	Automatic switch between different display layouts
Digital Panel	Zoom in digitally by mouse
Event status	Display status for network/record/motion upon every video region

**• PTZ**

Control	Pan, tilt and zoom controls; speed control
Preset Points and Tours	Go/set preset points
Number of Preset Points	32
Default Protocol	URL command

**• Recording**

Scheduled Recording	Record video with user defined schedule
Event Recording	Record video when the alarm event is triggered, including the pre-event buffered video clip
Event Speed-up Recording	Record I frame only in normal status, and record full frames when the alarm event is triggered
Manual Recording	Instant recording upon mouse click
Recording Frame Rate	Max 120 fps total; Max 30 fps per camera
Maximum Recording Throughput	16 Mbps

**• Storage**

Interface	Serial ATA
HDD Bay	Maximum 2 disks (disks not included)

**• Search & Playback**

Time Based Video Search	Search video recordings by time, channel or bookmark
Event Based Video Search	Search event triggered video recordings
Playback Control	Forward and backward playback with speeds 1/2x-1x-32x; pause; stop
Synchronized Playback	4 channels
Manual Snapshot	Create snapshot from playback for export
Video Cropping	Crop a short video clip from long recording file and save it as an independent file; video clip length:(1-30mins)
Video Export	Export video clips in AVI/RAW format via USB storage

**• Event Management**

Event Trigger	Video motion detection; External device through digital input; Video loss and recovery; Network loss and recovery
Event Response	Record video; Play alert beep; Activate external device through digital output; E-mail notification with snapshots; Event logging; Go to PTZ preset point; Pop-up instant playback

**• System**

FW Upgrade	FW Upgrade via USB mass storage
Configuration backup/restore	Configuration backup/restore via USB mass storage
Permission Control	Multi-group/users, liveview/playback/setup/remote level permission
Data Backup	USB mass storage
Operating System	Embedded Linux
System Status Monitor	Real time status reports on remote browser
Language	English

**• Remote Access**

PC Web Browser	Microsoft Internet Explorer 8.0 or 9.0
----------------	--

**• Hardware**

Dimensions (W x H x D)	135 mm x 121 mm x 241 mm ( 5.3" x 4.8" x 9.5")
Weight	1.33kg (2.93 lb) without HDD
Operating Temperature	0°C~ 40°C(32°F ~ 104°F)
Operating Humidity	10% ~ 85% RH
Power Source / Consumption	DC 12V/ 50W
Bundled Accessories	Power Adapter, (100~240V) with 3 different connectors included
Approvals	CE, FCC Adapter: CE, FCC, UL, PSE, EFFICIENCY LEVEL V
USB	USB 2.0, 2 ports
Ethernet Port	2, Ethernet (1000 Base-T), RJ-45 connector, Built-in DHCP server support on Ethernet Port 1
Display port	HDMI

**• Integration**

Unified Solution	Fully compatible with ACTi camera with H.264 compression
------------------	--

\* All specifications are subject to change without notice.

\* All brand names and registered trademarks are the property of their respective owners.

[www.acti.com](http://www.acti.com)