

## GV-BX3400 Series 3MP H.264 WDR pro D/N Box IP Camera

GV-BX3400-0F / 1F / 2F



GV-BX3400-4V



GV-BX3400-5V



- 3 megapixel progressive scan CMOS
- Dual streams from H.264 and MJPEG
- Up to 20 fps at 2048 x 1536, 30 fps at 1920 x 1080
- Built-in / external microphone
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Memory Card Slot
- Mini USB slot for WiFi Adapter (Optional)
- Wide Dynamic Range (WDR)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Removable IR-cut filter for Day/Night function
- Varifocal megapixel lens
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF conformant

\* No Memory card slot & local storage function for Argentina.

### Active Tampering Alarm


Tampered




Focus Change



Camera Shift

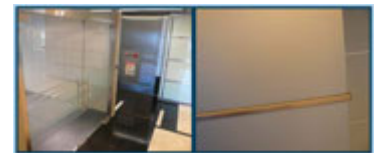

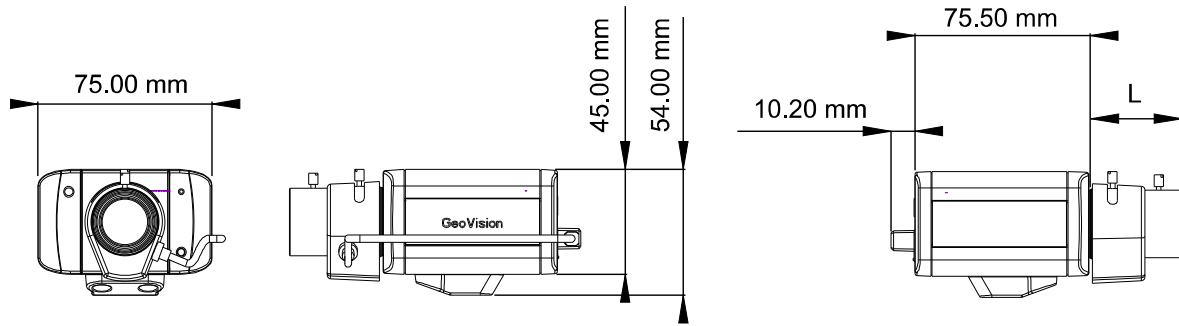

Model	L Length
BX3400-0F	15.7 mm
BX3400-1F	15.7 mm
BX3400-2F	15.7 mm
BX3400-4V	37.1 mm
BX3400-5V	46.9 mm

## SPECIFICATIONS

Camera	GV-BX3400-0F	GV-BX3400-1F	GV-BX3400-2F	GV-BX3400-4V	GV-BX3400-5V
Image Sensor	1/3" progressive scan CMOS				
Picture Elements	2048 (H) x 1536 (V)				
Minimum Illumination	Color	0.08 Lux			
	B/W	0.05 Lux			
	IR ON	0 Lux			
Shutter Speed	Automatic, Manual (1/5 ~ 1/8000 sec)				
White Balance	Automatic, Manual (2800 ~ 8500K)				
Gain Control	Automatic				
S/N Ratio	47 dB				
BLC	Yes				
WDR Pro	Yes (with WDR sensor)				
<b>Lens</b>					
Megapixel	Yes				
Day/Night	Yes (with removable IR-cut filter)				
Lens Type	Fixed			Varifocal	
Focal Length	4 mm	8 mm	12 mm	3 ~ 10.5 mm	2.8 ~ 6 mm
Maximum Aperture	/1.5	F/1.6		F/1.4	F/1.3
Mount	CS Mount				
Image Format	/3"	1/2.5"		1/2.7"	1/3"
Operation	Focus	Manual			Manual (w/lock)
	Zoom	Fixed			Manual (w/lock)
	Iris	Fixed			DC drive
Torque (Focus/Zoom screws)	0.049 N.m				
<b>Operation</b>					
Video Compression	H.264, MJPEG				
Video Streaming	Dual streams from H.264 and MJPEG				
Frame Rate	20 fps at 2048 x 1536 * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).				
Image Setting	Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, D/N Sensitivity, Backlight Compensation, WDR, Defog				
Audio Compression	G.711, AAC (24 kHz / 16 bit)				
Two-way Audio	Yes				
Sensor Input	1 input (Dry Contact)				
Alarm Output	1 Digital Output (200mA 5V DC)				
<b>Video Resolution</b>					
Main Stream	4:3	2048 x 1536, 1600 x 1200, 1280 x 960, 640 x 480, 320 x 240			
	16:9	1920 x 1080, 1280 x 720, 640 x 360, 448 x 252			
	5:4	1280 x 1024, 640 x 512, 320 x 256			
Sub Stream	4:3	640 x 480, 320 x 240			
	16:9	640 x 360, 448 x 252			
	5:4	640 x 512, 320 x 256			

<b>Network</b>		
Interface	10/100 Ethernet	
Protocol	HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP), ONVIF	
Wireless LAN	IEEE 802.11 b/g/n	
Antenna Type	External	
Security	WEP, WPA-PSK(TKIP), WPA-PSK(AES), WPA2-PSK(TKIP), WPA2-PSK(AES)	
<b>Mechanical</b>		
Lens Mounting	CS-Mount	
Temperature Detector	Yes	
Connectors	Power	2-pin terminal block, PoE
	Ethernet	RJ-45
	Audio	1 In (Using the built-in microphone or externally connecting a microphone) 1 Out (Stereo phone jack, 3.5 mm / 0.14 in)
	Digital I/O	3-pin terminal block, pitch 2.5 mm / 0.1 in
	Auto Iris	Yes
	Local Storage	Micro SD / SDHC / SDXC memory card slot (for Class 6 card or above)
	TV-Out	BNC connector (640 x 480 resolution)
	Mini USB	Yes (for GV-WiFi Adapter)
LED Indicator	2 LEDs: Power, Status	
<b>General</b>		
Operating Temperature	0 °C ~ 50 °C / 32 °F ~ 122 °F	
Humidity	10% to 90% (no condensation)	
Power Source	12V DC / PoE	
Max. Power Consumption	9.5W	
Dimensions (L X W X H)	75.5 x 75 x 54 mm / 2.97 x 2.95 x 2.13 in (without lens)	
Weight	300 g / 0.66 lb	
Regulatory	CE, FCC, C-Tick, RoHS compliant	
<b>Power over Ethernet</b>		
PoE Standard	IEEE 802.3af Class 3 Power over Ethernet / PD	
PoE Power Supply Type	End-Span	
PoE Power Output	Per Port 48V DC, 350mA. Max. 15.4 watts	
<b>Web Interface</b>		
Installation Management	Web-based configuration	
Maintenance	Firmware upgrade through Web Browser or Utility	
Access from Web Browser	Camera live view, video recording, change video quality, bandwidth control, image snapshot, digital I/O control, audio, Wide Angle Lens Dewarping, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay	
Language	Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish	
<b>Applications</b>		
Network Storage	GV-NVR, GV-System, GV-Backup Center, GV-Recording Server	
Smart Device Access	- GV-Eye for Android smartphone, tablet, iPhone, and iPod Touch- GV-Eye HD for iPad	
Live Viewing	IE , GV-MultiView	
CMS Server support	GV-Control Center, GV-Center V2, GV-VSM	

- Note:**
1. The signal range and data throughput may vary depending on the network conditions and environmental factors.
  2. Specifications are subject to change without notice.