

iSCSI RAID Subsystem



High Performance, High Availability, Easy Management

Arena iSCSI RAID system is designed to utilize existing investment for delivering cost effective IP-SAN for SMBs. The single upgradable to active-active redundant controller architecture support seamless controller failover without downtime. High redundancy module, powerful hardware engine, high scalable expansion options and user-friendly management interface make it the best choice for fault tolerance, enterprise level solutions under limited budget.

In recent years, video surveillance has shifted from analogue to digital data archiving; which recording streams via digital video recorder (DVR) or network video recorder (NVR) to external storages with RAID features data protection. Furthermore, critical record would request infrastructure like storage area network (SAN) to achieve performance, scalability and reliability.

Arena offers a complete range of DAS/SAN solutions to meet the critical requirement of modern video surveillance application, various features are tailored for it and various configurations can fulfil different demand.

FEATURES HIGHLIGHT

Single Controller Upgradable

Single controller model is field upgradable to a redundant solution. You could upgrade single to redundant by directly insert another controller module, So you can just configure a Active/Active solution by use both controller simultaneously for double I/O throughput, or if you prefer to have Active/Standby solution, you can put one controller on "standby", so it becomes a backup for the other one.

Innovate New Array Structure

The system features a new innovate array structure that hierarchically organizes storage objects. With this structure, physical drives are combined into Disk Groups (DG). DGs are subdivided into Logical Disks (LDs) where arrays are created. LDs can be combined together to form a stripped Volumes. Either Volumes or LDs can be pointed to a LUN which are then presented to the host computer.

JBOD Expansion

This feature provides users the option to attach external SAS JBOD unit to expand the capacity of their storage solution. By cascading the RAID-less SAS JBOD unit helps reduce the total cost of ownership.

Full complement of iSCSI features

Link Aggregation (802.3ad) and jumbo frame support for maximizing bandwidth and performance, Challenge Handshake Authentication Protocol (CHAP) authentication, Header Digest and Data Digest help to guarantee iSCSI data, Internet Storage Name Service (iSNS) for helping management of iSCSI devices and support multiple iSCSI targets up to 8 sets.

Centralized management by RAIDGuard Central

RAIDGuard Central (RGC), a free centralized management utility provides centralized monitoring multiple RAID systems by through Ethernet at a local area network. Easier install RGC to a normal PC as an agent and then any PC/server could monitor to RAID system remotely. Allow customer to warning the engineer real-time with mail sending and most popular web messenger: MSN.

Janus II Series iSCSI RAID Subsystem



SPECIFICATION

Hardware

Model No.	SS-6603E / SS-6603R
Controller No.	Single (Upgradable) / Dual (Redundant)
Controller CPU	Intel IOP34x 1.2GHz
Cache Memory	1024-4096 MB DDR II
Battery Backup	Yes
Expansion	miniSAS (SFF-8088) port(*2)
Management port	10/100Mbit port (RJ45)
UPS monitoring	1 (RS232)

*1. Support SATA drive needs AA-MUX tray board equipped.
*2. Support up to 118 disks (include local chassis)

Host Interface	iSCSI GbE (RJ45)
Host Channel No.	4 / 8
Disk Interface	SAS (SATA compatibility)(*1)
Disk Channel No.	16 x 3.5" swappable trays
Hot Swap Disk Tray	16
Hot Swap Power Supply	2 x 460W Redundant
AC Input Voltage	100 to 240V (+/-10%), 47 to 63 Hz
Hot Swap Fan Module	3 x Turbo Fan

iSCSI Functions

iSCSI Features	- Link-Aggregation, LACP (802.3ad)	- Header Digest and Data Digest
	- Jumbo Frame support (9000bytes)	- Internet Storage Name Service (iSNS)
	- Challenge Handshake Authentication Protocol (CHAP)	- Multiple iSCSI targets (up to 8)


RAID Functions

RAID Levels	JBOD, 0, 1, 3, 5, 6, 10, 30, 50, 60, NRAID	
RAID Features	- Support multiple RAID levels and stripe size	- Online capacity expansion and shrink
	- Support local hot spare and global hot spare	- Online drive traveling and array roaming
	- Instant and background initialization	- Online array recovery
	- Online RAID level and stripe size migration	- Support Disk Self Test (DST)
	- Online disk group defragmentation for free space consolidation	- Support Disk Scrubbing (DS)
		- Support Disk Cloning (DC)
Snapshot	Yes (firmware embedded)	

Environment Specification

Humidity	20% to 80% non-condensing
Operating Temp.	5°C to 40°C (41°F to 104°F)
Non-operating Temp.	-25°C to 60°C (-13°F to 140°F)
Physical Dimension	485(W) x 565(D) x 132(H) mm
Packed Dimension	610(W) x 790(D) x 450(H) mm
Safety Regulatory	UL, CUL, CB
EMC Standard	FCC, CE, C-Tick, BSMI
Physical Weight	24Kgs (without drives)
Packed Weight	33Kgs (without drives)

* Specifications and product offerings may vary without notice.
* Various trademarks belong to their respective owners.

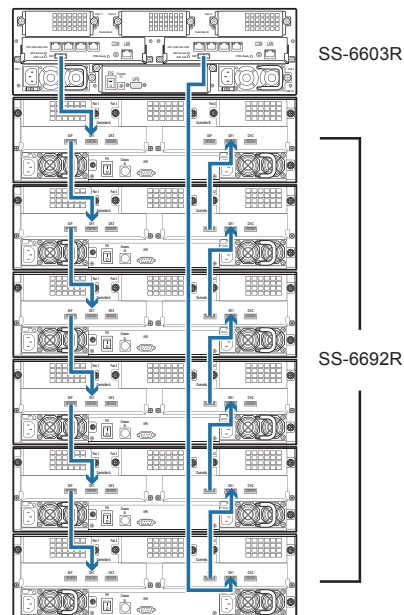

Headquarters

MaxTronic International Co., Ltd.
TEL : 886-2-2218 4875
FAX : 886-2-2218 4896
<http://www.maxtronic.com>

America

Arena-MaxTronic Inc.
TEL : 1-626-962 1888
FAX : 1-626-337 8822
<http://www.maxtronic.com>

China

欧骅股份有限公司 上海办事处
TEL : 86-021-62708599
FAX : 86-021-62708580
<http://www.maxtronic.com>