

Certificate

Issue Date: 2009/04/16
Ref. Report No. ISL-09HE104FB

Product Name: : Network Attached Storage
Model Number(s) : **Please reference the attachment**
Responsible Party : **QNAP Systems, Inc.**
Address : 21F, No. 77, Sec. 1, Xintai 5th Rd.
Xizhi City, Taipei Country, 221 Taiwan, R.O.C
Contact Person :

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).

Standards:


FCC CFR Title 47 Part 15 Subpart B: 2008- Section 15.107 and 15.109

ANSI C63.4-2003

Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 4: 2004
Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

We certify that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988. 21 U.S.C. 853(a)



Jim Chu/ Director

International Standards Laboratory

Lung-Tan LAB:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325,
Taiwan

Tel: 886-3-407-1718; Fax: 886-3407-1738

Hsi-Chih LAB:

No. 65, Gu Dai Keng St., Hsichih, Taipei Hsien
22117, Taiwan.

Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Declaration of Conformity

This device complies with Part 15 of the FCC Rules. The test result has been shown in the ISL test report with number ISL-09HE104FB. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Product Name:	Network Attached Storage
Model:	Please reference the attachment
Name of Responsible Party:	QNAP Systems, Inc.
Address of Responsible Party:	21F,No.77,Sec. 1,Xintai 5th Rd. Xizhi City,Taipei Country,221 Taiwan,R.O.C
Contact Person:	
Phone No.:	(02)8698-2000 Ext:1616
Fax No.:	(02)8698-2270

We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable FCC Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the Commissions requirements.

QNAP Systems, Inc.
Issue Date: 2009/04/16

FCC TEST REPORT

of

CFR 47 Part 15 Subpart B Class B

Application Type: Declaration of Conformity

Product : **Network Attached Storage**

Model(s): **Please reference the attachment**

Applicant: **QNAP Systems, Inc.**

Address: **21F, No.77, Sec. 1, Xintai 5th Rd.
Xizhi City, Taipei Country, 221
Taiwan, R.O.C**



NVLAP LAB CODE: 2002340

Test Performed by:

International Standards Laboratory

<HC LAB>

*Site Registration No.

BSMI:SL2-IN-E-0037; SL2-R1/R2-E-0037; TAF: 1178;
IC: IC4067; VCCI: R-341, C-354, T-313; NEMKO: ELA 113A

*Address:

No. 65, Gu Dai Keng St.

Hsichih, Taipei Hsien 22117, Taiwan

*Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Report No.: **ISL-09HE104FB**

Issue Date : **2009/04/16**

Contents of Report

- 1. General 1
 - 1.1 Certification of Accuracy of Test Data.....1
 - 1.2 Applicant Information.....2
 - 1.3 Operation Environment2
- 2. Description of EUT 3
- 3. Description of Support Equipment5
 - 3.1 Description of Support Equipment.....5
 - 3.2 Software for Controlling Support Unit.....6
 - 3.3 I/O Cable Condition of EUT and Support Units.....7
- 4. Powerline Conducted Emissions 8
 - 4.1 Configuration and Procedure8
 - 4.1.1 EUT Configuration 8
 - 4.1.2 Test Procedure 8
 - 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)..... 8
 - 4.2 Conduction Test Data: Configuration 19
 - 4.3 Conduction Test Data: Configuration 211
 - 4.4 Conduction Test Data: Configuration 313
 - 4.5 Conduction Test Data: Configuration 415
- 5. Open Field Radiated Emissions 17
 - 5.1 Configuration and Procedure17
 - 5.1.1 EUT Configuration 17
 - 5.1.2 Test Procedure 17
 - 5.1.3 Spectrum Analyzer Configuration (for the frequencies tested) 17
 - 5.2 Radiation Test Data: Configuration 118
 - 5.3 Radiation Test Data: Configuration 222
 - 5.4 Radiation Test Data: Configuration 326
 - 5.5 Radiation Test Data: Configuration 430
- 6. Appendix 34
 - 6.1 Appendix A: Warning Labels.....34
 - 6.2 Appendix B: Warning Statement.....35
 - 6.3 Appendix C: Measurement Procedure for Powerline Conducted Emissions.....36
 - 6.4 Appendix D: Test Procedure for Radiated Emissions37
 - 6.5 Appendix E: Test Equipment.....38
 - 6.5.1 Test Equipment List..... 38
 - 6.5.2 Software for Controlling Spectrum/Receiver and Calculating Test Data 38
 - 6.6 Appendix F: Layout of EUT and Support Equipment40
 - 6.6.1 General Conducted Test Configuration..... 40
 - 6.6.2 General Radiation Test Configuration 41
 - 6.7 Appendix G: Uncertainty of Measurement42
 - 6.8 Appendix H: Photographs of EUT Configuration Test Set Up43
 - 6.9 Appendix I: Photographs of EUT Please refer to the File of ISL-09HE104P49
- 7. Attachment: 50



1. General

1.1 Certification of Accuracy of Test Data

Standards: FCC CFR Title 47 Part 15 Subpart B: 2008- Section 15.107 and 15.109
ANSI C63.4-2003
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 4: 2004

Equipment Tested: Network Attached Storage

Model: Please reference the attachment

Applied by QNAP Systems, Inc.

Sample received Date: 2009/04/15

Final test Date : refer to the date of test data

Test Result: **PASS**

Report Engineer: Lily L.C. Tseng

Test Engineer: Andy SH Chen
Andy SH Chen

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the radiated and power line conducted electromagnetic emissions generated by sample equipment under test at the time of the test.

The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

Jim Chu

Jim Chu / Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 52 pages, including 1 cover page , 1 contents page, and 50 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

1.2 Applicant Information

Applicant: QNAP Systems, Inc.
21F, No. 77, Sec. 1, Xintai 5th Rd.
Xizhi City, Taipei Country, 221
Taiwan, R.O.C

1.3 Operation Environment

Test Site: OATS 01; Conduction 01

Test Distance 10M

Temperature refer to each site test data

Humidity: refer to each site test data

input power: Conduction input power: AC 120 V / 60 Hz
Radiation input power: AC 120 V / 60 Hz

2. Description of EUT

EUT

Description:	Network Attached Storage
Condition:	Pre-Production
Model:	Please reference the attachment
Serial Number:	N/A
Power Supply Type:	ETASIS (Model: EFRP-M300)*2 & EFRP-M2300 *1 AC INPUT: 100~240V 5-2.5A, 47~63Hz DC OUTPUT: +5V 20A +3.3V 20A +12V 22A -12V 0.8A +5VSB 3A +5V AND +3.3V 25A 300W (MAX). EMACS (Model: P1S2-2300V-R)* 2 AC INPUT: 100~240V 47-63Hz 4.5-2A DC OUTPUT: 300W (MAX) +5V 0-20A +12V 24A +3.3V 0-20A -12V 0-0.5A +5VSB 0-2.5A +5V AND +3.3V TOTAL Max: 140W
CPU:	Intel Core 2 Duo E7400 2.8GHz FSB: 1066
DIMM Memory:	Transcend (Model: 517488-5207) 2GB DDR2-667MHz
ATA Disk Chip:	ADC II
Power Switch Button:	one
USB 2.0 Port:	four (4-pins)
Serial Port:	one (9-pins)
D-SUB Port:	one (15-pins)
RJ45 Connector:	two (8-pins) (10/100/1000Mbps)
Hard Disk1:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk2:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk3:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk4:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk5:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk6:	Seagate (Model:ST3500320AS) 500GB

-4- Declaration of Conformity

Hard Disk7: (Option)
 Seagate (Model:ST3500320AS) 500GB
 (Option)
 Hard Disk8: Seagate (Model:ST3500320AS) 500GB
 (Option)

All types of EUT Connect have been tested. The worst data listed in this test report.

Test Configuration:

Test Mode:

Mode	Hard Disk	LAN1	LAN2	Power Supply
1	Seagate (Model:ST3500320AS) 500GB *8	1000Mbps	1000Mbps	ETASIS (Model:EFRP-M300)* 2
2	Seagate (Model:ST3500320AS) 500GB *8	1000Mbps	1000Mbps	ETASIS (Model:EFRP-M300)*1
3	Seagate (Model:ST3500320AS) 500GB *8	1000Mbps	1000Mbps	EMACS (Model: P1S2-2300V-R)*2
4	Seagate (Model:ST3500320AS) 500GB *8	1000Mbps	1000Mbps	EMACS (Model: P1S2-2300V-R)*1

EMI Noise Source

Crystal: 14.318MHz (X1), 25MHz (X2), 25MHz (X3)

Clock Generator: ICS 954128AFLF (U11), 25MHz (Y1), 4MHz (Y1)

EMI Solution:

N/A

3. Description of Support Equipment

3.1 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
Notebook Personal Computer	Latitude D400 S/N: N/A	DELL	Non-shielded, Detachable	FCC DOC
17" LCD Monitor	VA703B	View Sonic	Non-shielded, Detachable	FCC DOC
Rack mountable Switch	DGS-1008D	D-Link	Non-shielded, Detachable	FCC DOC
External HDD Enclosure*4	OT-201 S/N: NA	A-TEC	N/A	FCC DOC

3.2 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Read and write to the disk drives.
- B. R/W External Hard Disk from USB Port.
- C. Send signal from EUT to server through LAN port.
- D. Repeat the above steps.

	Filename	Issued Date
LAN	Tfgen.exe	06/23/1999
Hard Disk	InterEMC.exe	5/21/1996
External Hard Disk	InterEMC.exe	5/21/1996

-7- Declaration of Conformity

3.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to EUT SPS	1.8M	Non-shielded, Detachable	Plastic Head
LAN Data Cable	Server to Switch RJ 45 Connector	33 feet	Non-shielded, Detachable	RJ-45, with Plastic Head
LCD Monitor Data Cable	LCD Monitor D-Sub Port to EUT D-Sub Port	1.88M	Non-shielded, Detachable	Metal Head Plastic Head
LAN Data Cable*2	EUT RJ 45 Connector to Switch RJ 45 Connector.	2.0M	Non-shielded, Detachable	RJ-45, with Plastic Head
USB Data Cable*4	External HDD Enclosure USB Port to EUT USB Port	0.98M	Non-shielded, Detachable (With Core)	Metal Head
Serial Data Cable	EUT Serial Port to PC Serial Port	5.0M	Shielded, Detachable	Metal Head

4. Powerline Conducted Emissions

4.1 Configuration and Procedure

4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall was 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit of standards used.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms impedance termination was connected to the test instrument. The excess length of the power cord was folded back and forth at the center of the lead to form a bundle 30cm to 40cm in length.

Any changes made to the configuration or modifications made to EUT during testing, are noted in the following test record.

If EUT has an extra auxiliary AC outlet which can provide power to an external monitor, all measurements will be made with the monitor power from EUT-mounted AC outlet and then from floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on both hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz~30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

4.2 Conduction Test Data: Configuration 1

Table 4.2.1 Power Line Conducted Emissions (Hot)

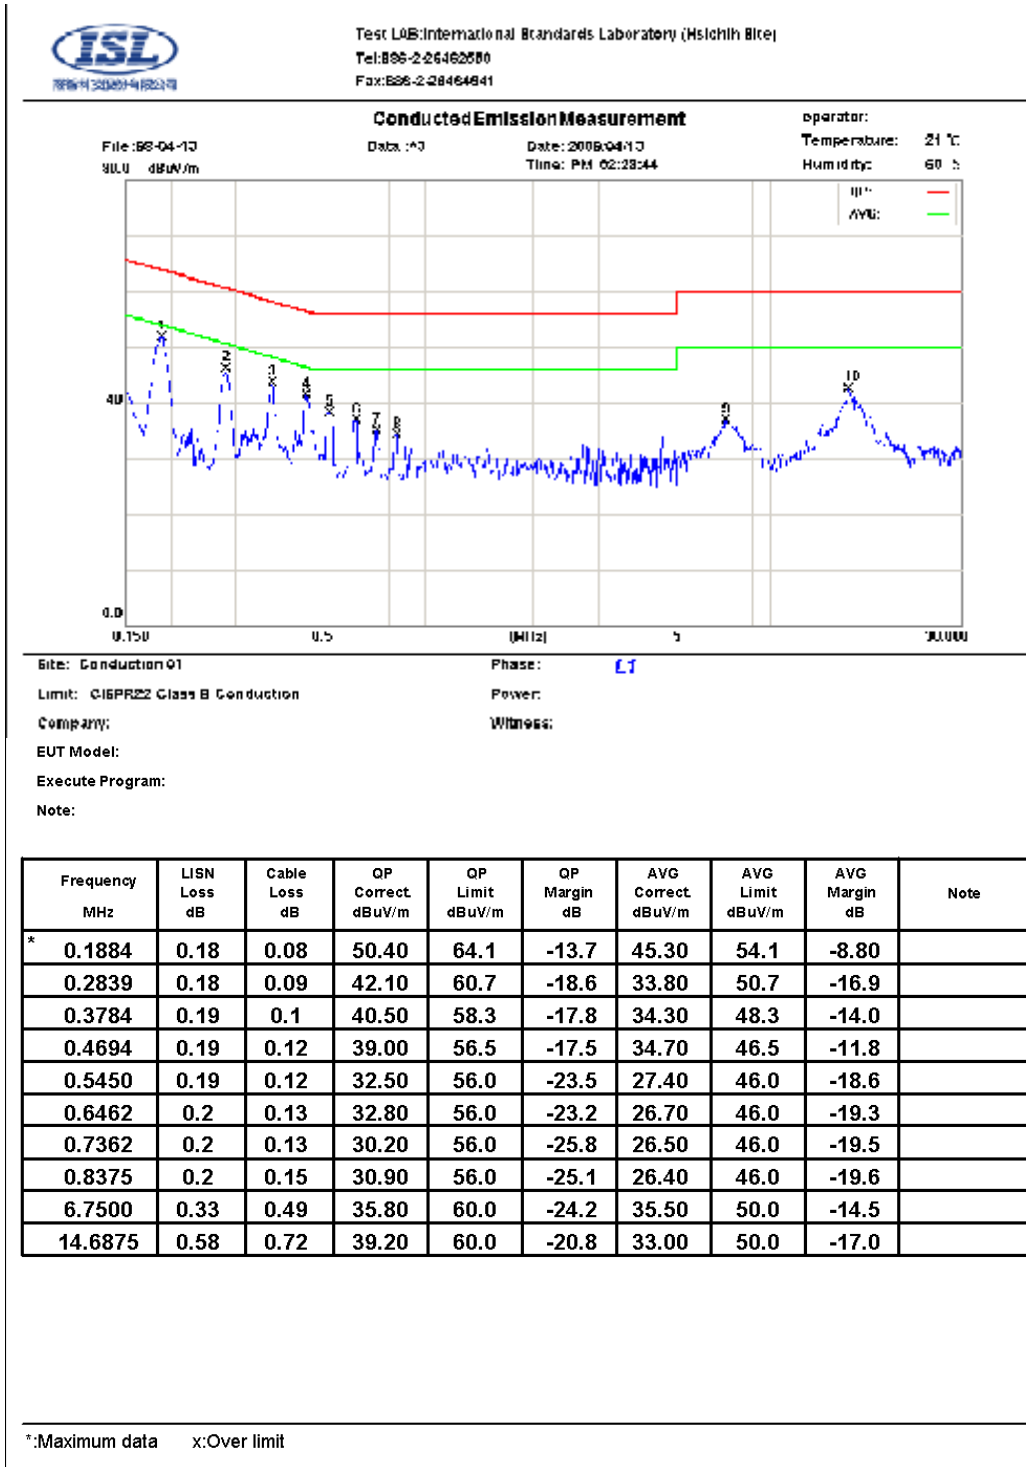

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.


If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

-10- Declaration of Conformity



Table 4.2.2 Power Line Conducted Emissions (Neutral)

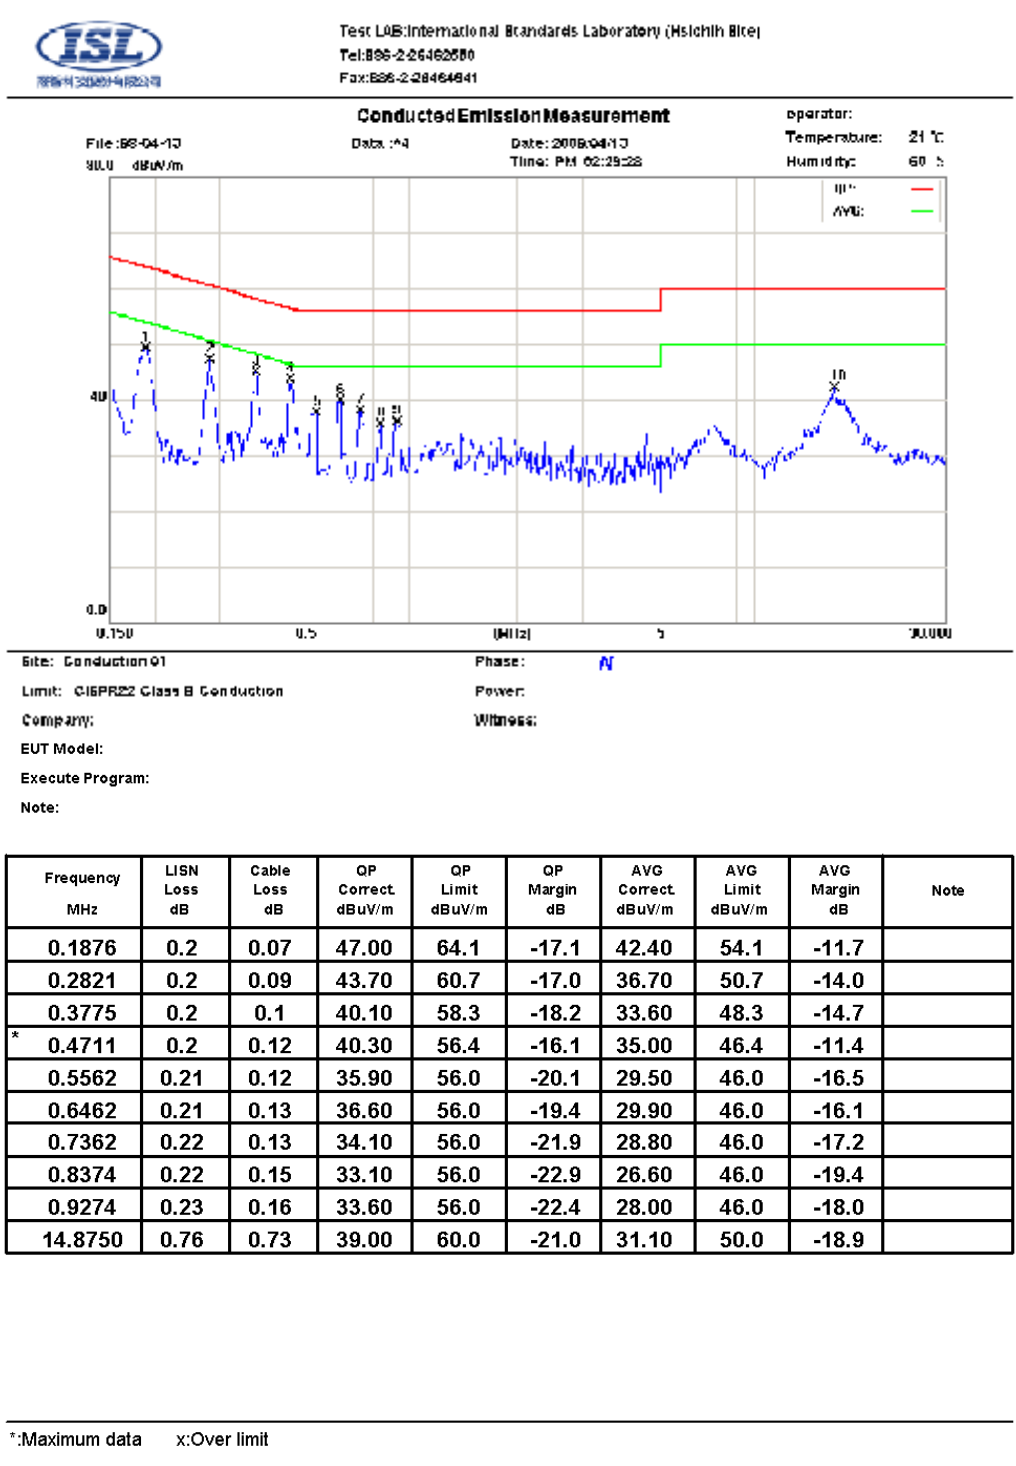

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

4.3 Conduction Test Data: Configuration 2

Table 4.3.1 Power Line Conducted Emissions (Hot)

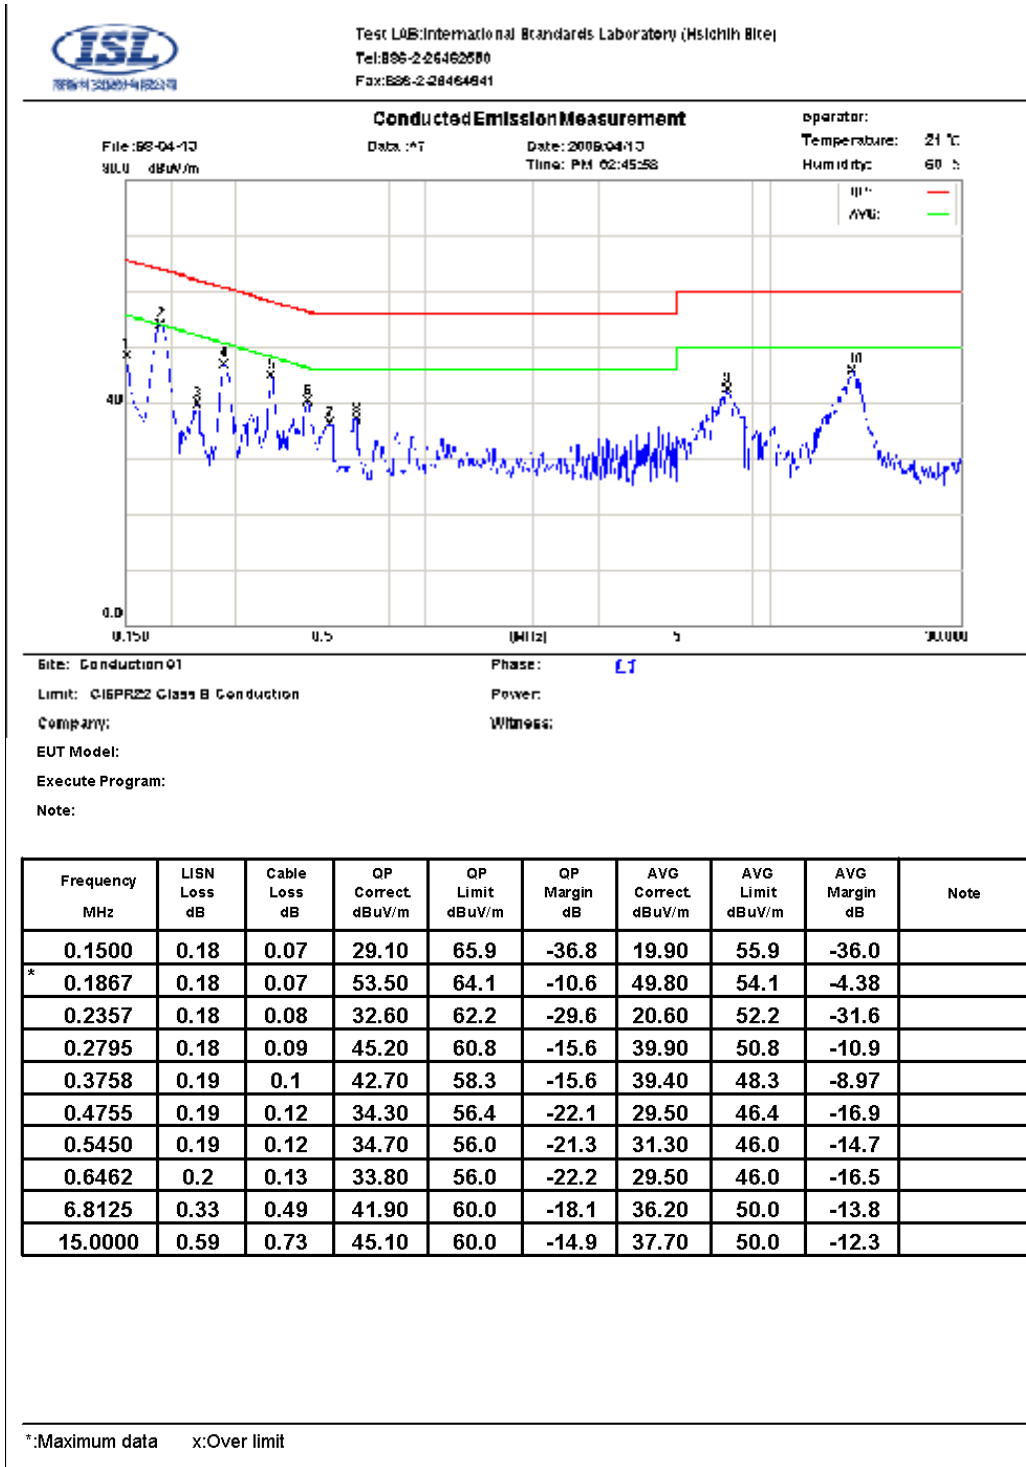

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Table 4.3.2 Power Line Conducted Emissions (Neutral)

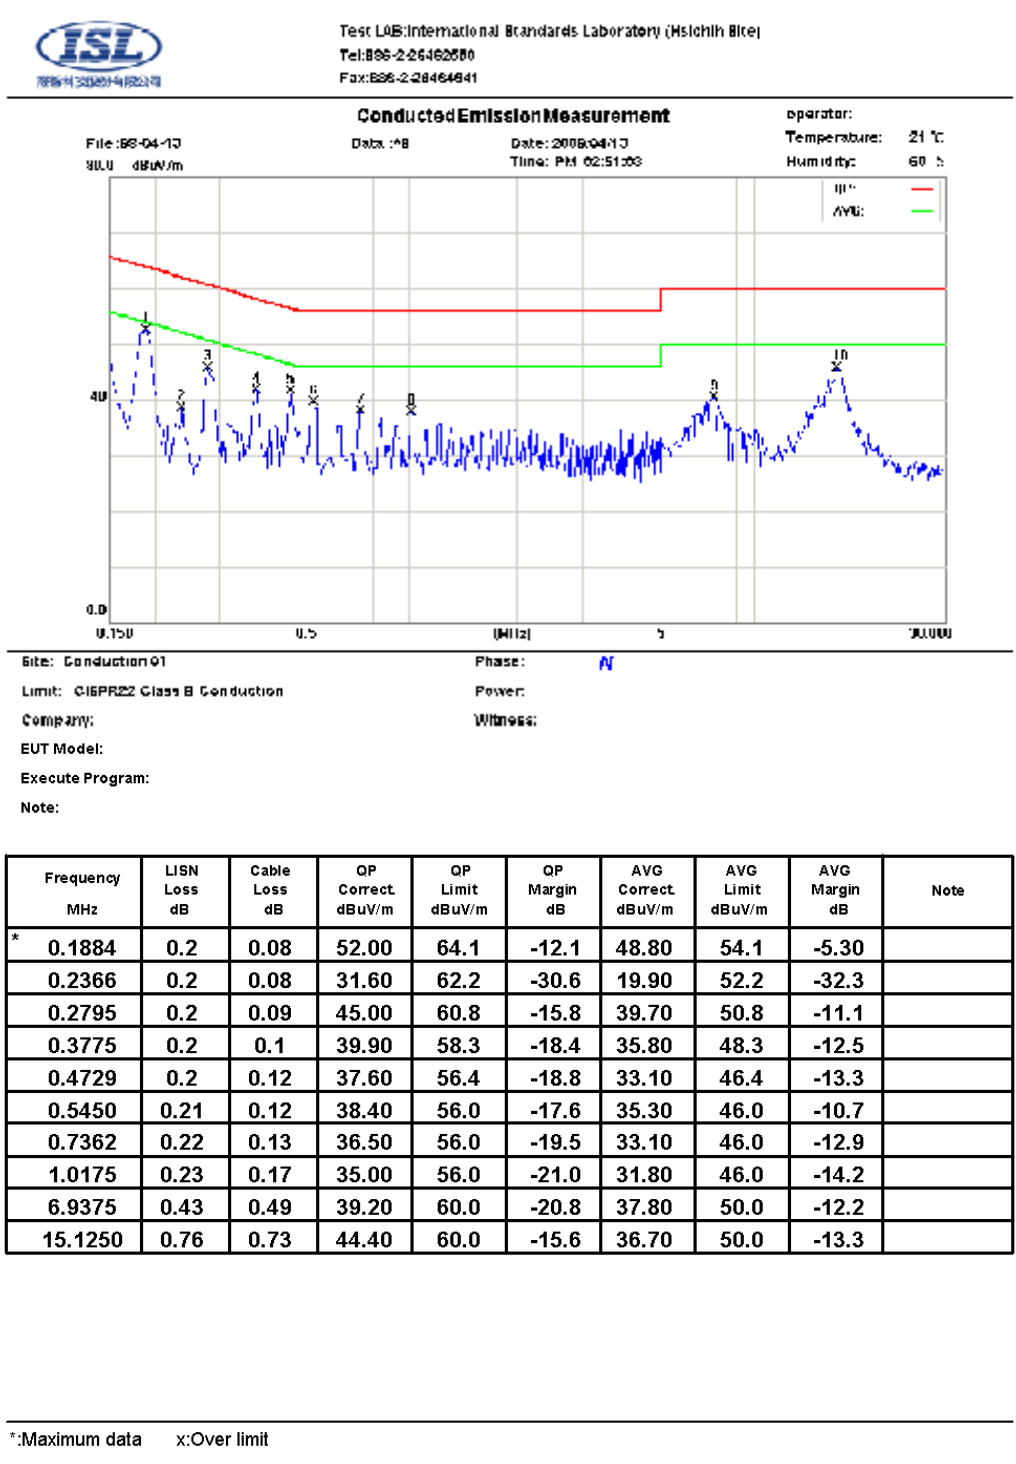

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

4.4 Conduction Test Data: Configuration 3

Table 4.4.1 Power Line Conducted Emissions (Hot)

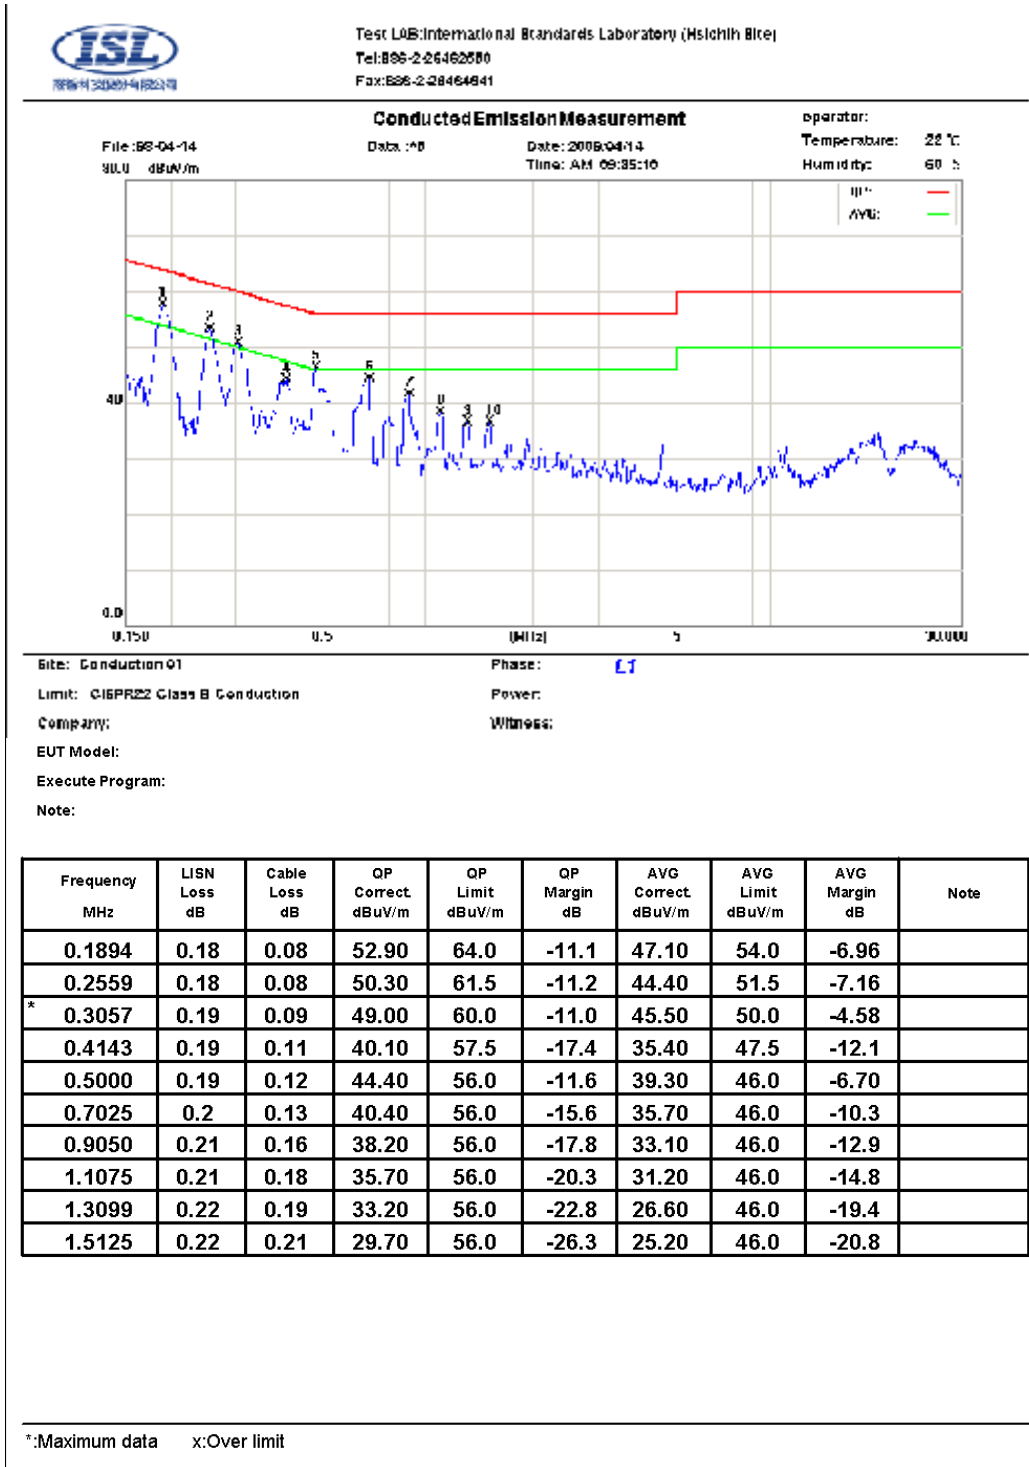

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

-14- Declaration of Conformity

Table 4.4.2 Power Line Conducted Emissions (Neutral)

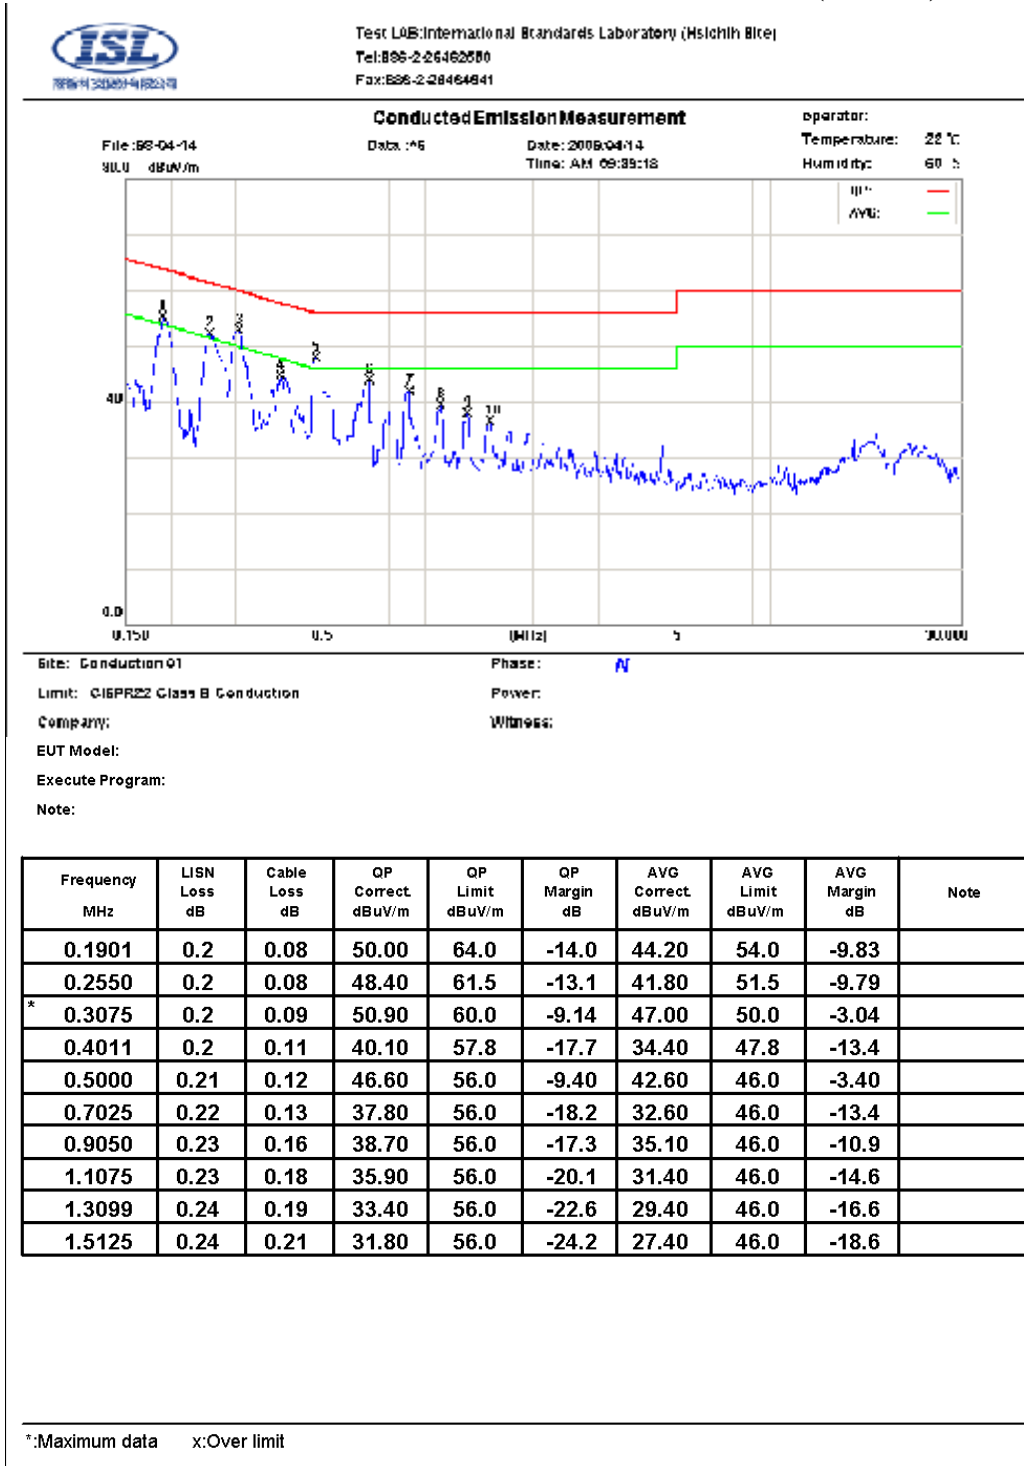

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

4.5 Conduction Test Data: Configuration 4

Table 4.5.1 Power Line Conducted Emissions (Hot)

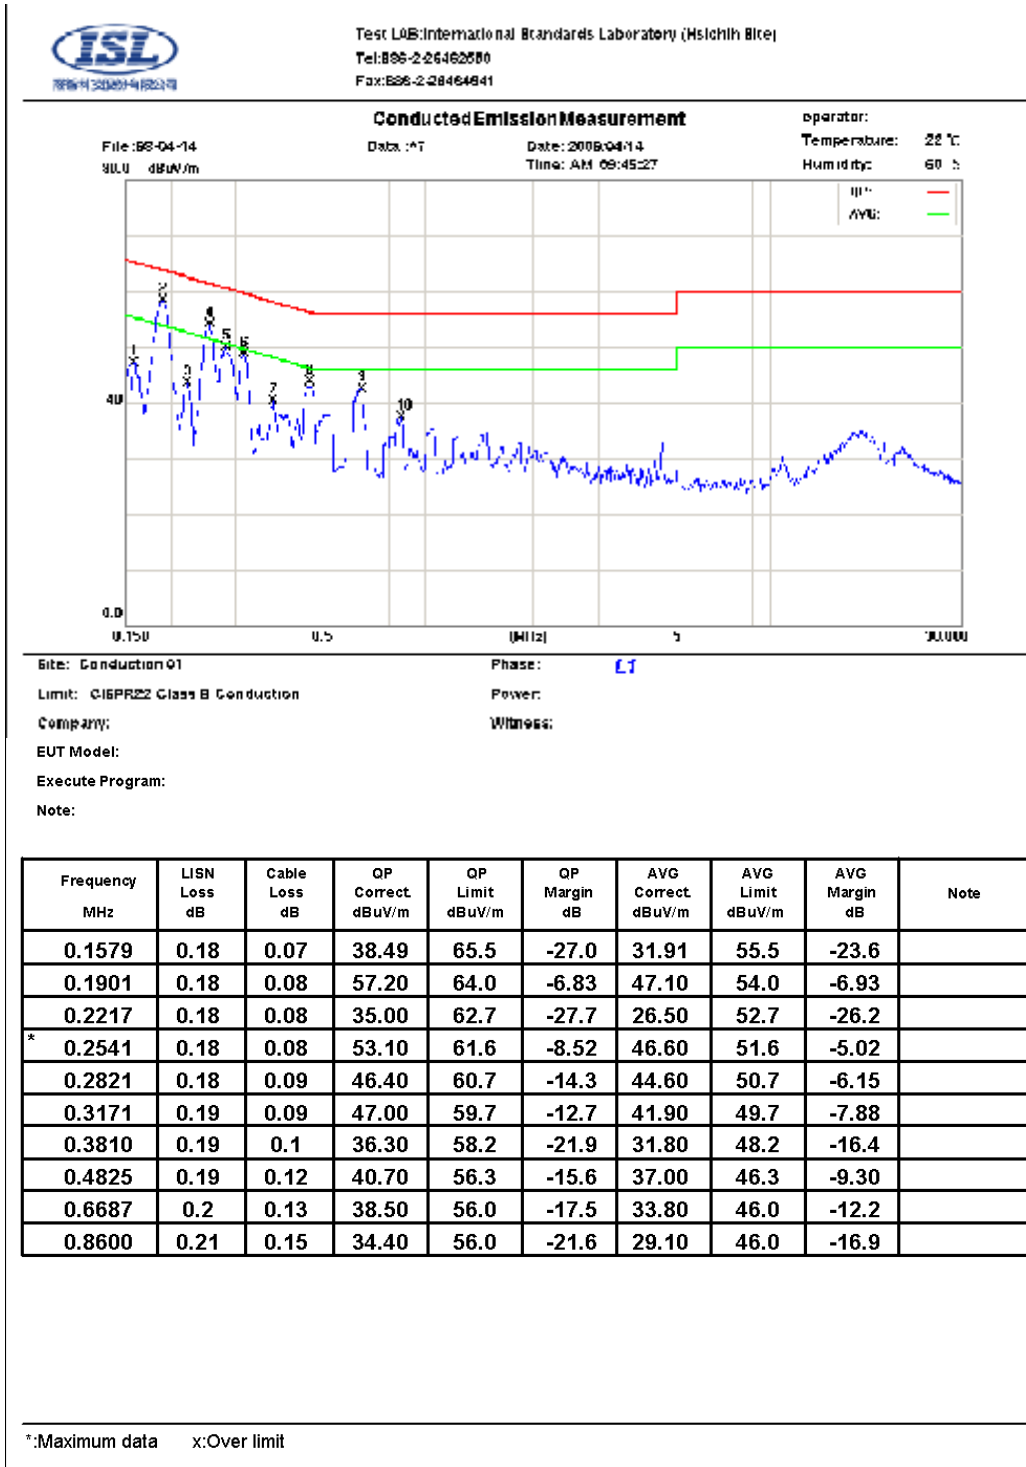

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Table 4.5.2 Power Line Conducted Emissions (Neutral)

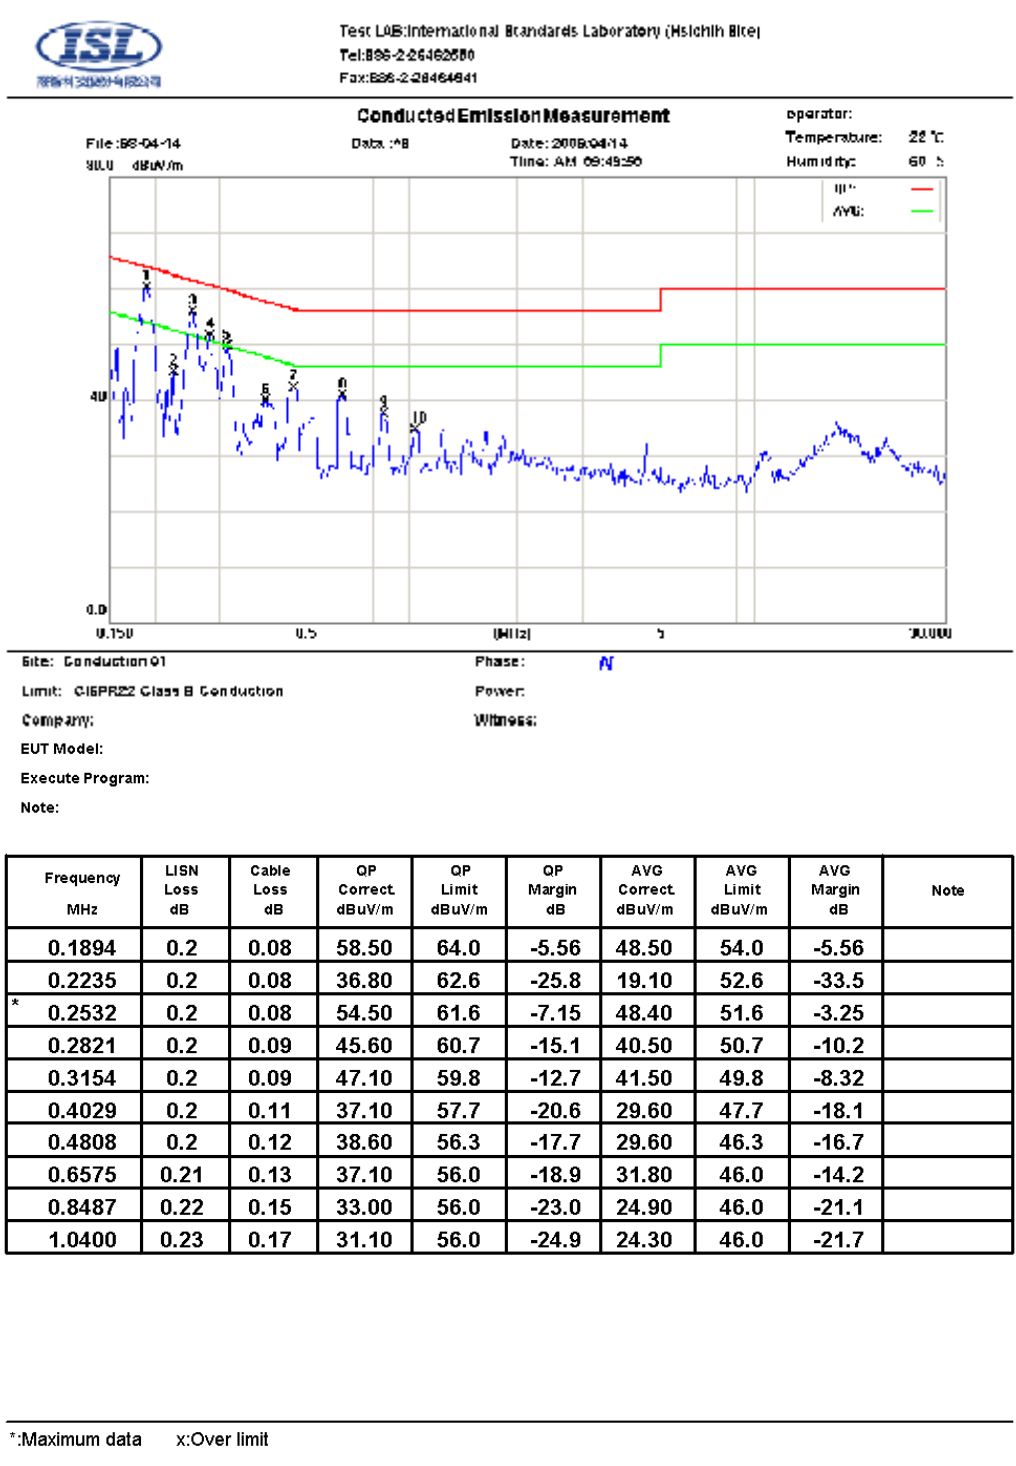

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

The CISPR 22 limits would be applied to all FCC Part 15 devices.

5. Open Field Radiated Emissions

5.1 Configuration and Procedure

5.1.1 EUT Configuration

The equipment under test was set up on a non-conductive table 80cm above ground, on a 10 meter open field or 10 meter chamber. The excess length of the power cord was folded back and forth at the center of the lead to form a bundle 30cm to 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If EUT has an extra auxiliary AC outlet which can provide power to an external monitor, all measurements will be made with the monitor power from EUT-mounted AC outlet and then from floor-mounted AC outlet.

5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The maximum emission was measured by varying the height of antenna and then by rotating the turntable. Both polarization of antenna, horizontal and vertical, were measured.

The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. The highest emissions of frequency higher than 1000 MHz was analyzed in peak mode and/or average mode to determine the precise amplitude of the emission.


5.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	30MHz--1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120KHz

Frequency Range:	Above 1000MHz
Detector Function:	Peak/Average Mode
Resolution Bandwidth:	1MHz

5.2 Radiation Test Data: Configuration 1

Table 5.2.1 Radiated Emissions (Horizontal)

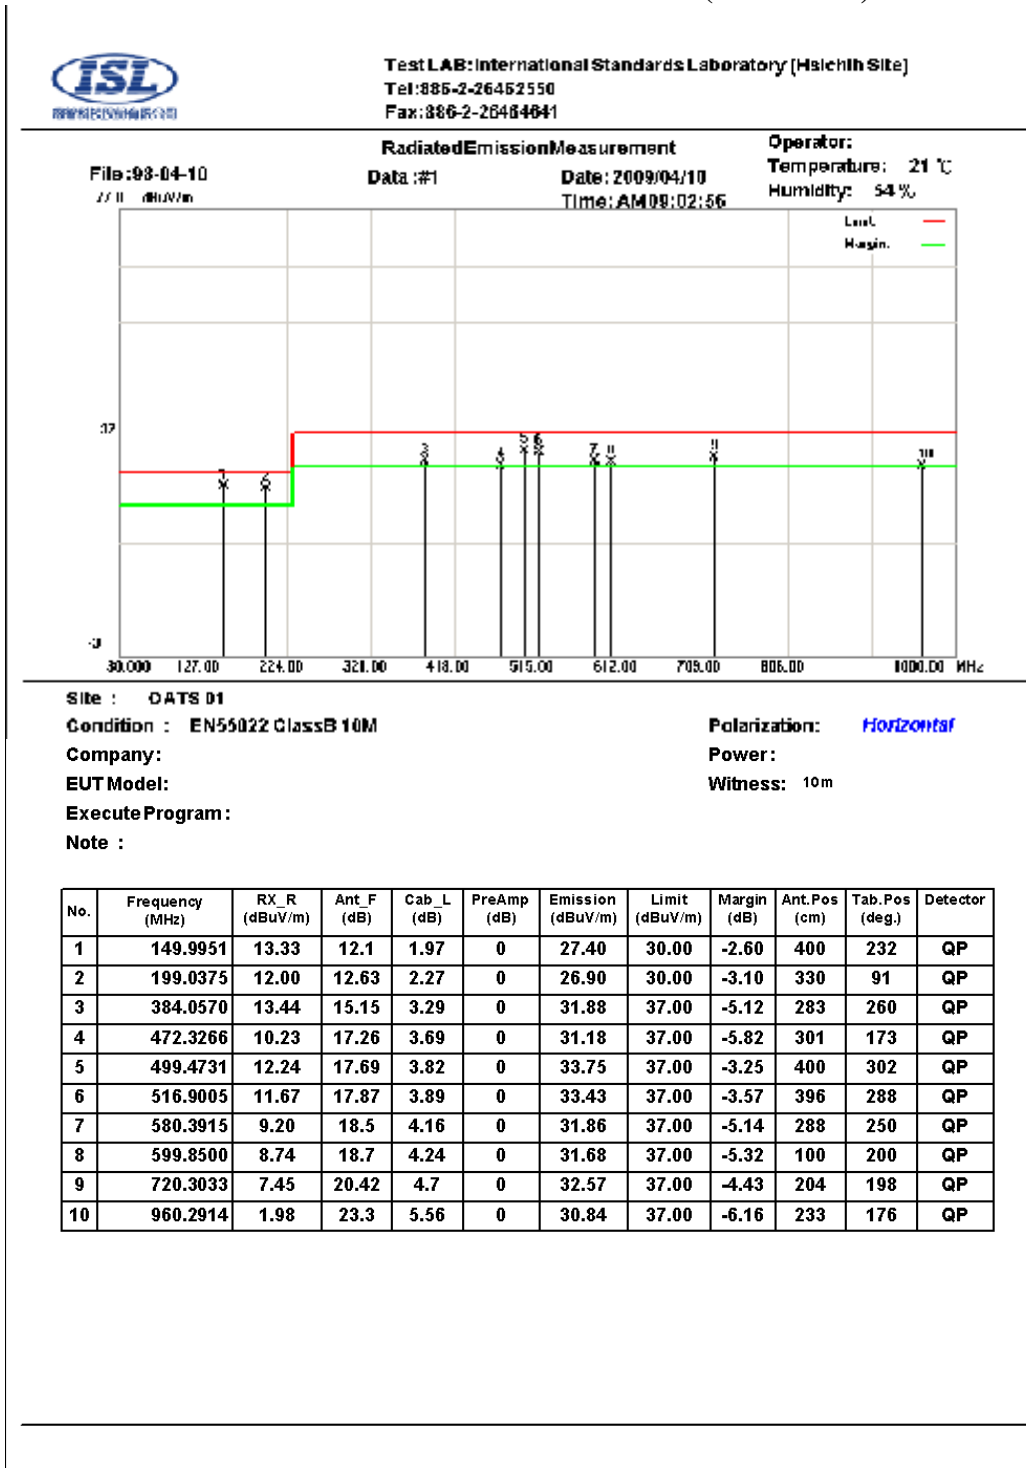

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

-19- Declaration of Conformity



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26454641

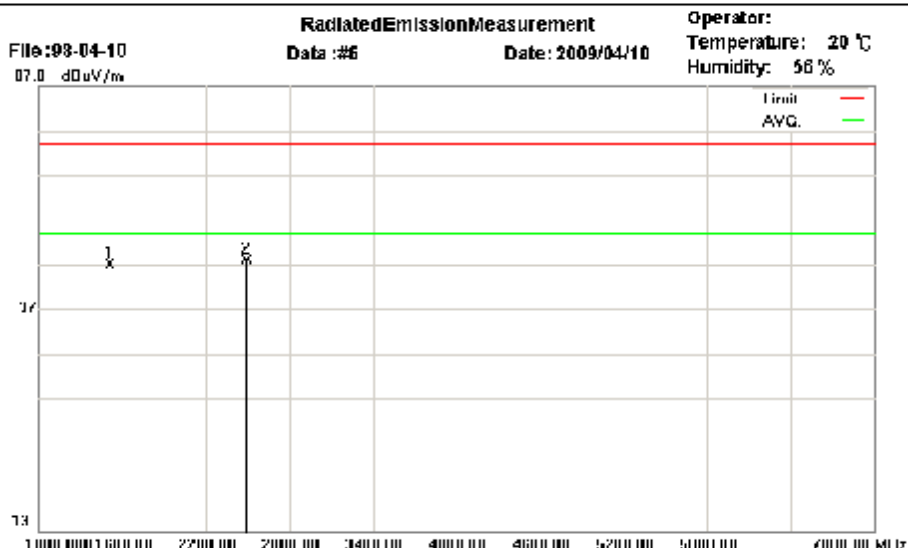

Site : Chamber01
Condition : FCC Class B Radiation
EUT :
Model Name :
Mode :
Note :


Polarization: Horizontal
Power:
Distance: 3m

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant F (dB)	Cab_L (dB)	PreAmp (dB)	Correct (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)
	1492.032	33.71	25.38	6.28	18.3	0	47.07	74.00	-26.93	100	234
*	2476.350	29.14	28.45	8.36	17.71	0	48.24	74.00	-25.76	100	172

*:Maximum data x:Over limit !:over margin

* Note:
 Margin = Corrected Amplitude – Limit
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain
 A margin of -8dB means that the emission is 8dB below the limit
 BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz
 Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz
The CISPR 22 limits would be applied to all FCC Part 15 devices.
Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.
Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 5.2.1 Radiated Emissions (Vertical)

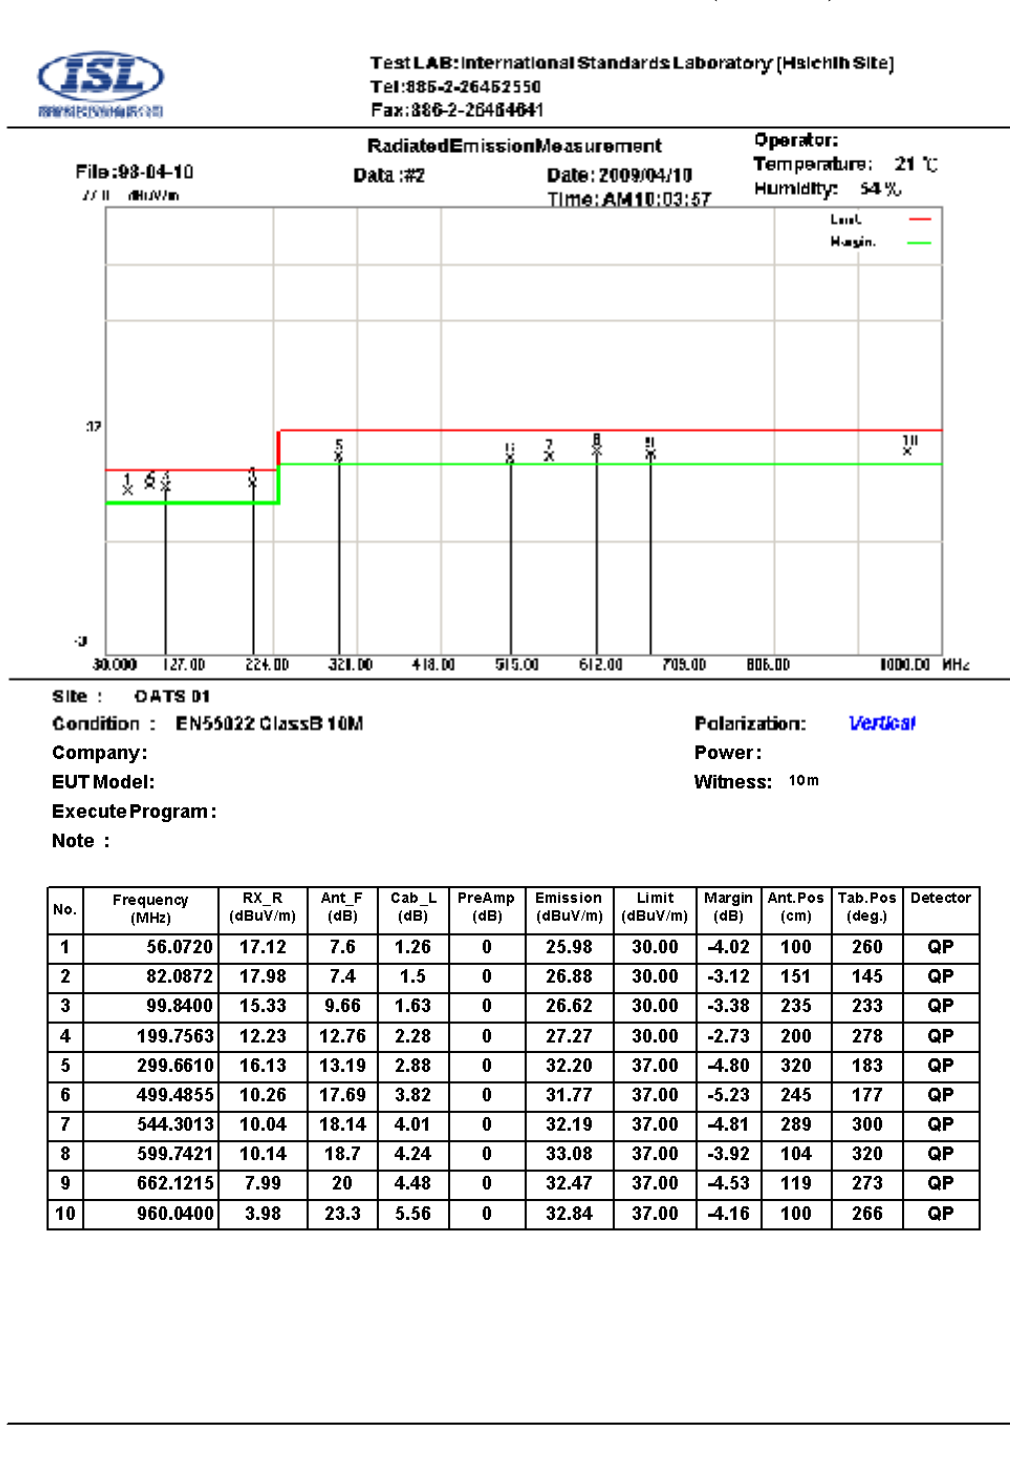

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
 Tel: 886-2-26482550
 Fax: 886-2-26454641

File: 98-04-10
 Radiated Emission Measurement
 Data: #7 Date: 2009/04/10
 Operator: Temperature: 20 °C
 Humidity: 58 %

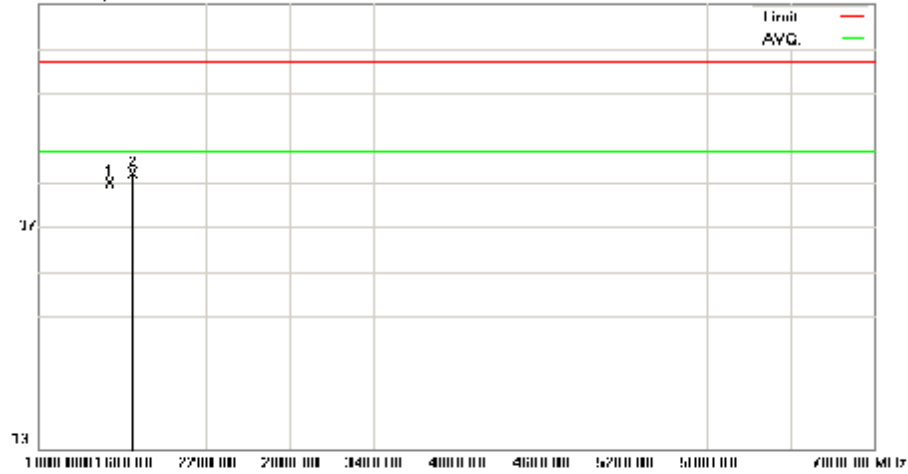

Site : Chamber 01
 Condition : FCC Class B Radiation
 EUT :
 Model Name :
 Mode :
 Note :
 Polarization : Vertical
 Power :
 Distance : 3m

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Correct (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)
	1492.036	33.61	25.38	6.28	18.3	0	46.97	74.00	-27.03	100	250
*	1660.050	34.66	26.04	6.68	18.2	0	49.18	74.00	-24.82	100	176

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



5.3 Radiation Test Data: Configuration 2

Table 5.3.1 Radiated Emissions (Horizontal)

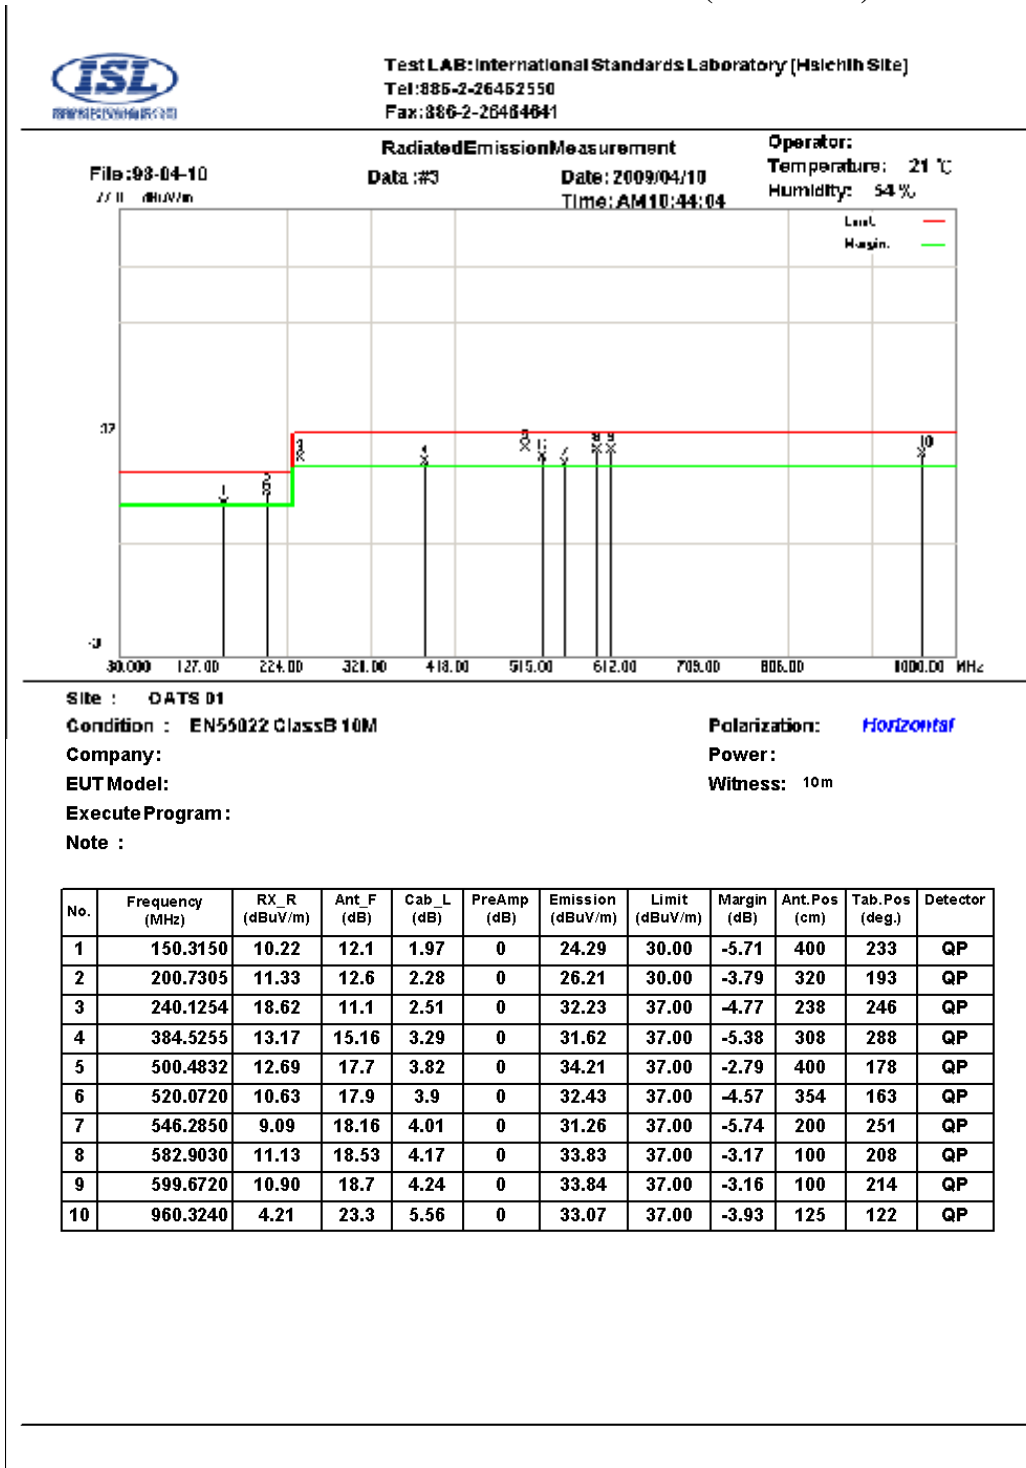

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz


The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

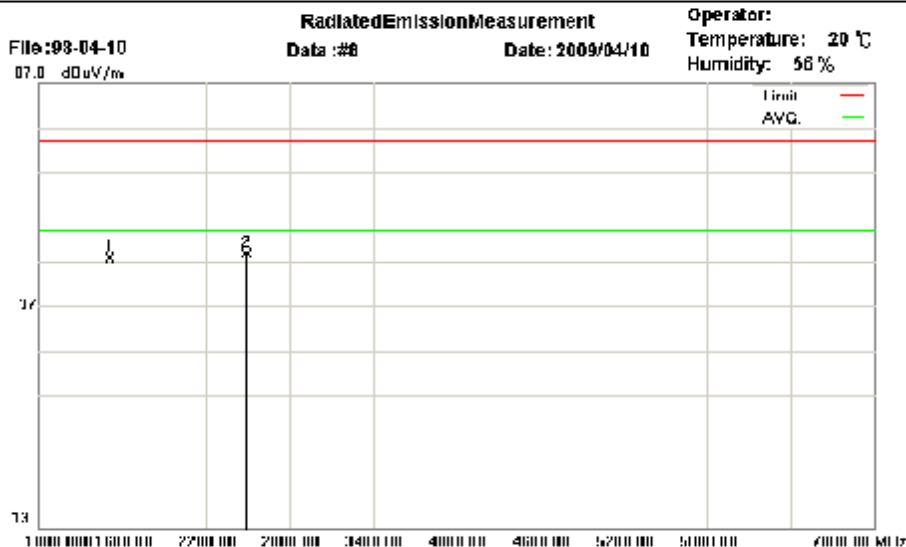

Site : Chamber01
Condition : FCC Class B Radiation
EUT : [Blank]
Model Name : [Blank]
Mode : [Blank]
Note : [Blank]


Polarization: Horizontal
Power: [Blank]
Distance: 3m

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant F (dB)	Cab_L (dB)	PreAmp (dB)	Correct (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)
	1492.005	34.53	25.38	6.28	18.3	0	47.89	74.00	-26.11	100	246
*	2476.552	29.80	28.45	8.36	17.71	0	48.90	74.00	-25.10	100	200

*:Maximum data x:Over limit !:over margin

* Note:
 Margin = Corrected Amplitude – Limit
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain
 A margin of -8dB means that the emission is 8dB below the limit
 BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz
 Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz
The CISPR 22 limits would be applied to all FCC Part 15 devices.
Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.
Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 5.3.1 Radiated Emissions (Vertical)

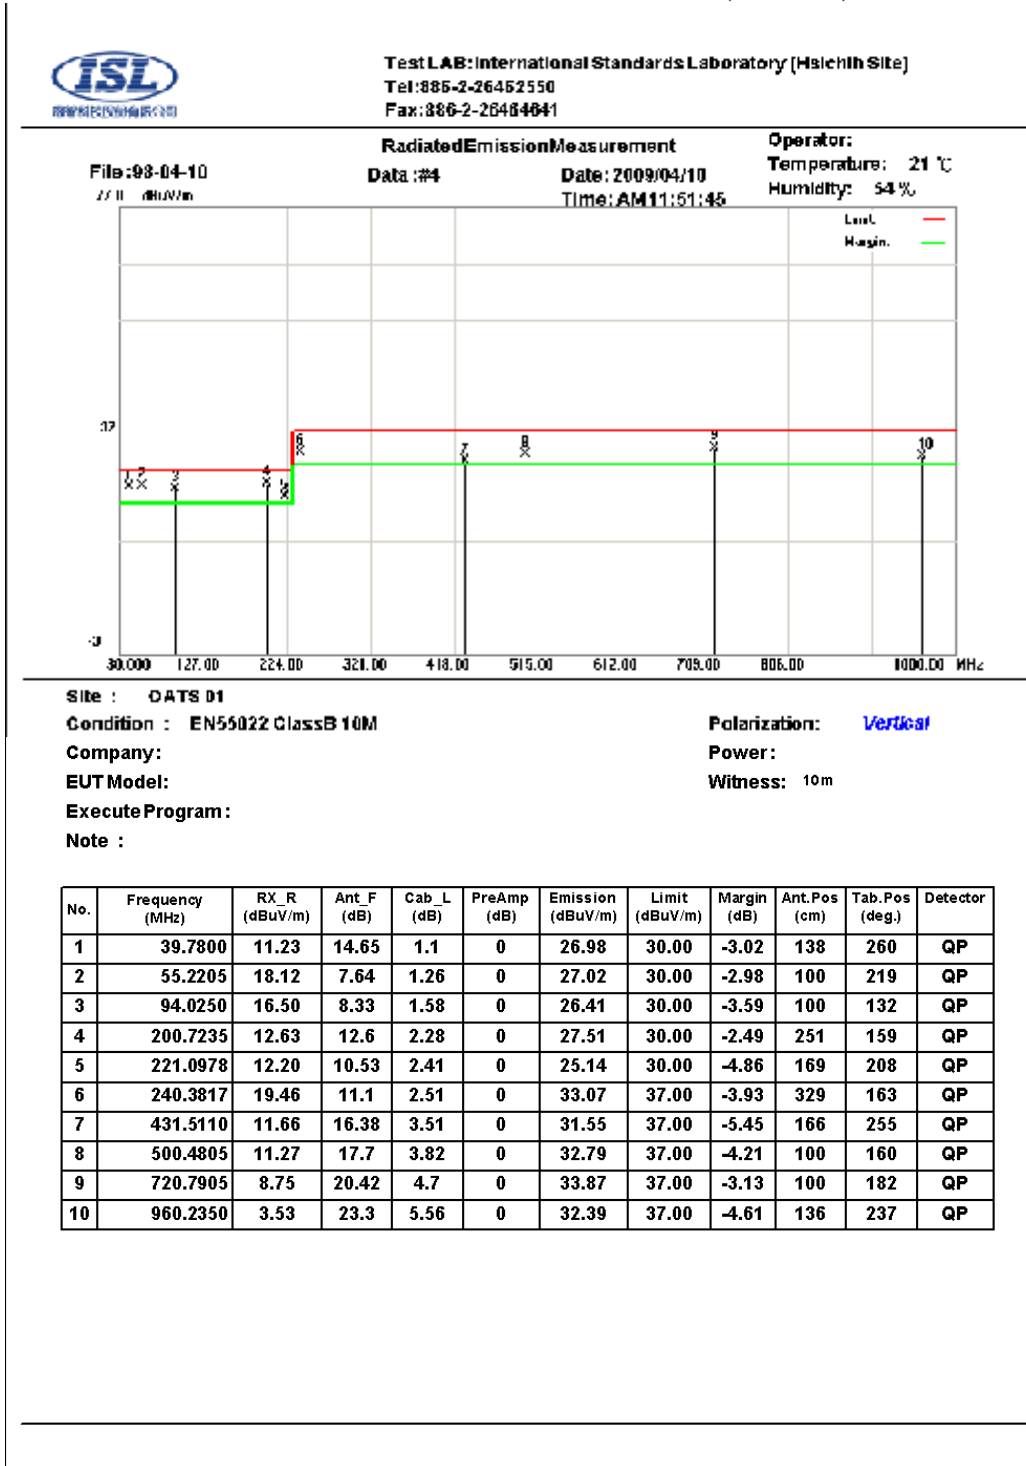

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.




Test LAB: International Standards Laboratory (Hsichih Site)
 Tel: 886-2-26482550
 Fax: 886-2-26454641

File: 98-04-10
 07.0 dBuV/m

Radiated Emission Measurement
 Data: #9 Date: 2009/04/10

Operator:
 Temperature: 20 °C
 Humidity: 58 %

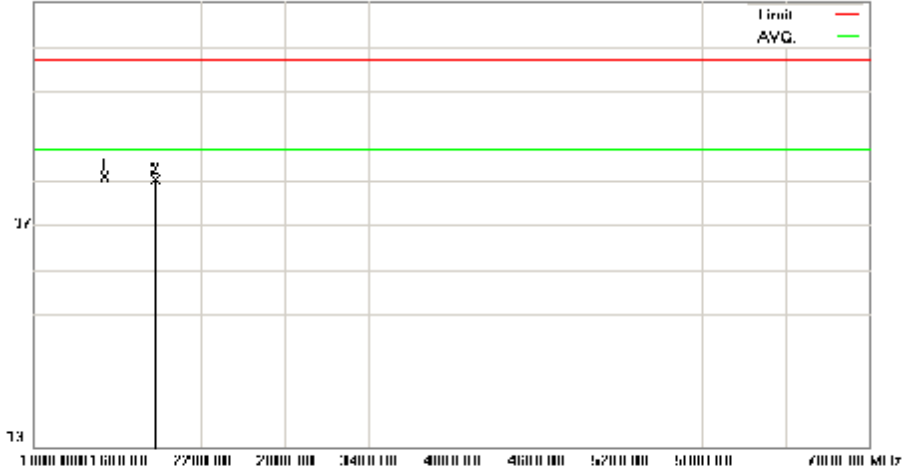

Site : Chamber 01
 Condition : FCC Class B Radiation
 EUT :
 Model Name :
 Mode :
 Note :

Polarization: Vertical
 Power :
 Distance: 3m

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Correct (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)
*	1492.043	34.41	25.38	6.28	18.3	0	47.77	74.00	-26.23	100	238
	1864.141	31.20	26.86	7.17	18.08	0	47.15	74.00	-26.85	100	173

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



5.4 Radiation Test Data: Configuration 3

Table 5.4.1 Radiated Emissions (Horizontal)

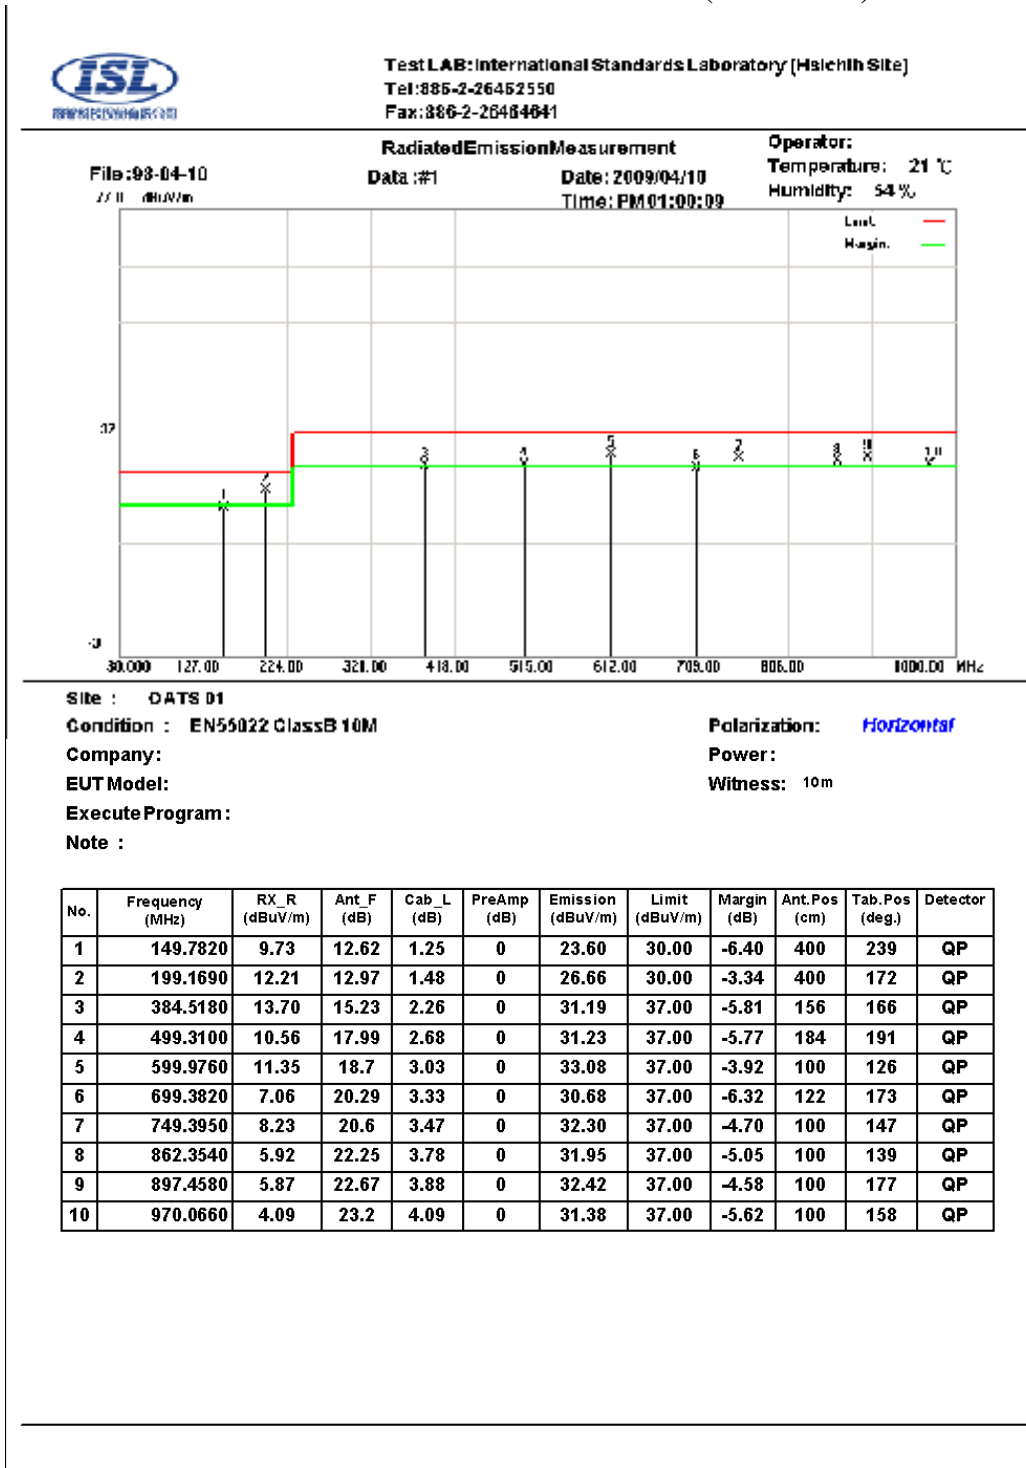

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz


The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

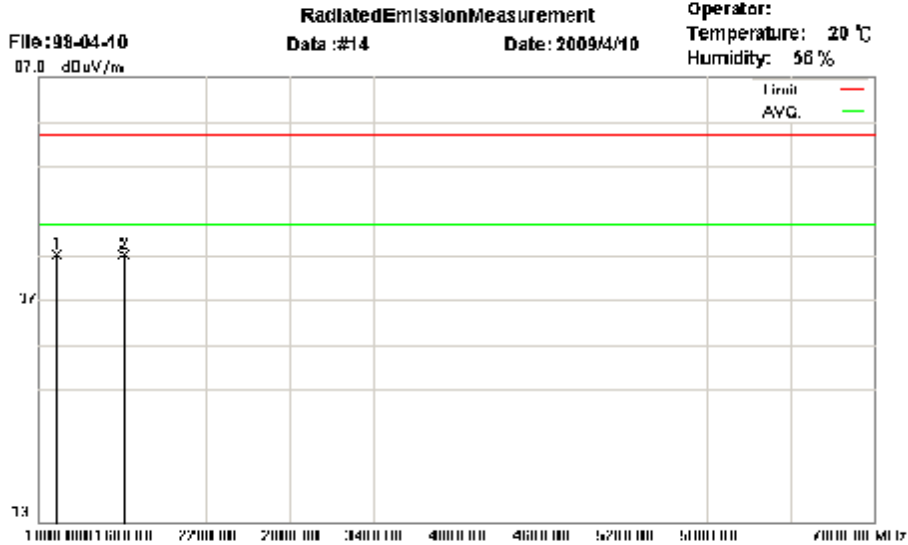

Site : QATS 01
Condition : FCC Class B Radiation
EUT :
Model Name :
Mode :
Note :

Polarization: Horizontal
Power :
Distance: 3m

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
	1120.250	35.51	24.49	5.24	18.22	47.02	74.00	-26.98	100	146	peak
*	1600.248	33.10	25.8	6.54	18.24	47.20	74.00	-26.80	100	138	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz


Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 5.4.1 Radiated Emissions (Vertical)

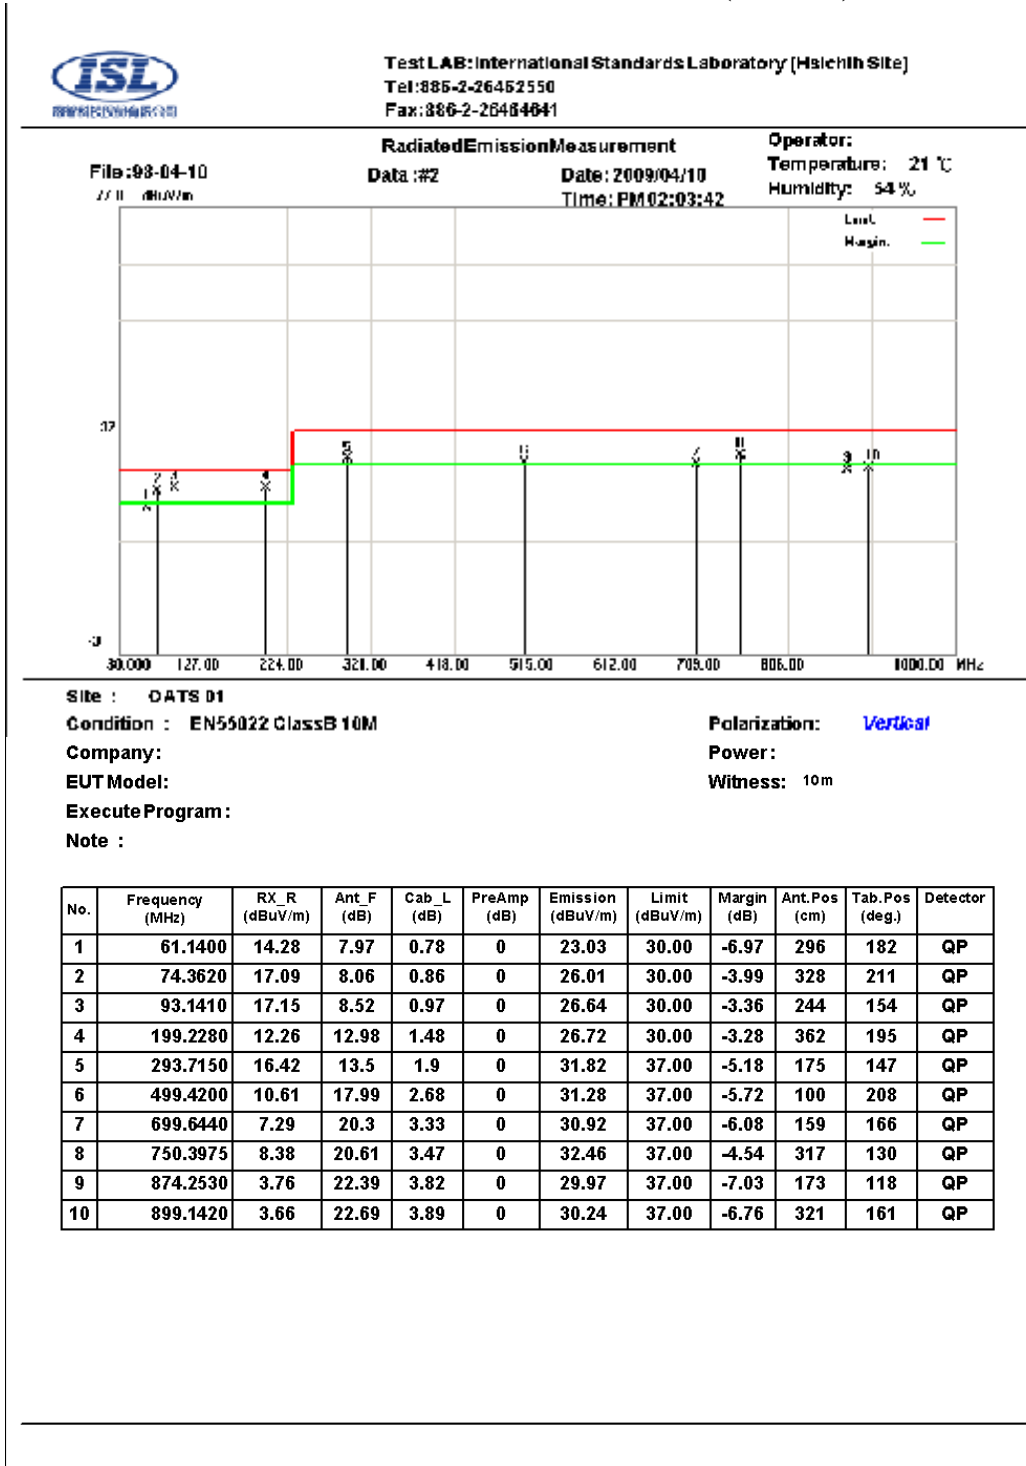

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
 Tel: 886-2-26482550
 Fax: 886-2-26454641

File: 98-04-10
 Radiated Emission Measurement
 Data: #15 Date: 2009/4/10
 Operator: Temperature: 20 °C
 Humidity: 58 %

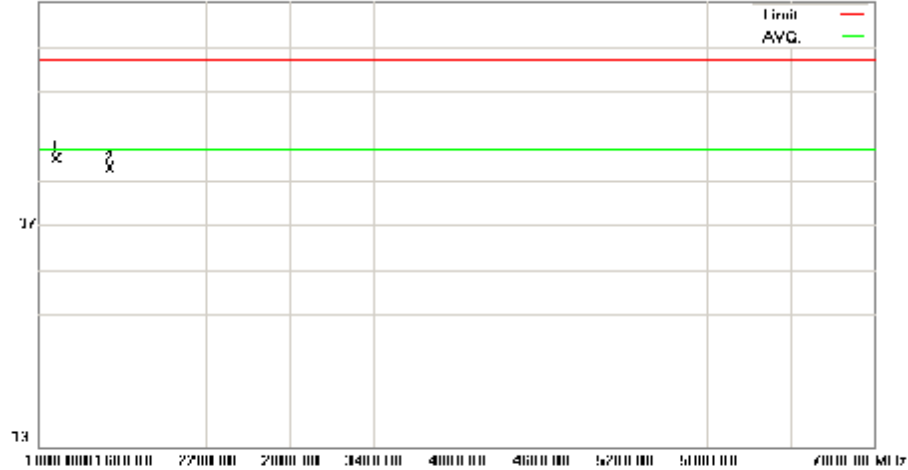

Site : QATS 01
 Condition : FCC Class B Radiation
 Polarization: Vertical
 EUT :
 Power :
 Model Name :
 Distance: 3m
 Mode :
 Note :

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
*	1116.345	40.49	24.48	5.23	18.22	51.98	74.00	-22.02	100	134	peak
	1500.253	36.40	25.41	6.3	18.3	49.80	74.00	-24.20	100	208	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



5.5 Radiation Test Data: Configuration 4

Table 5.5.1 Radiated Emissions (Horizontal)

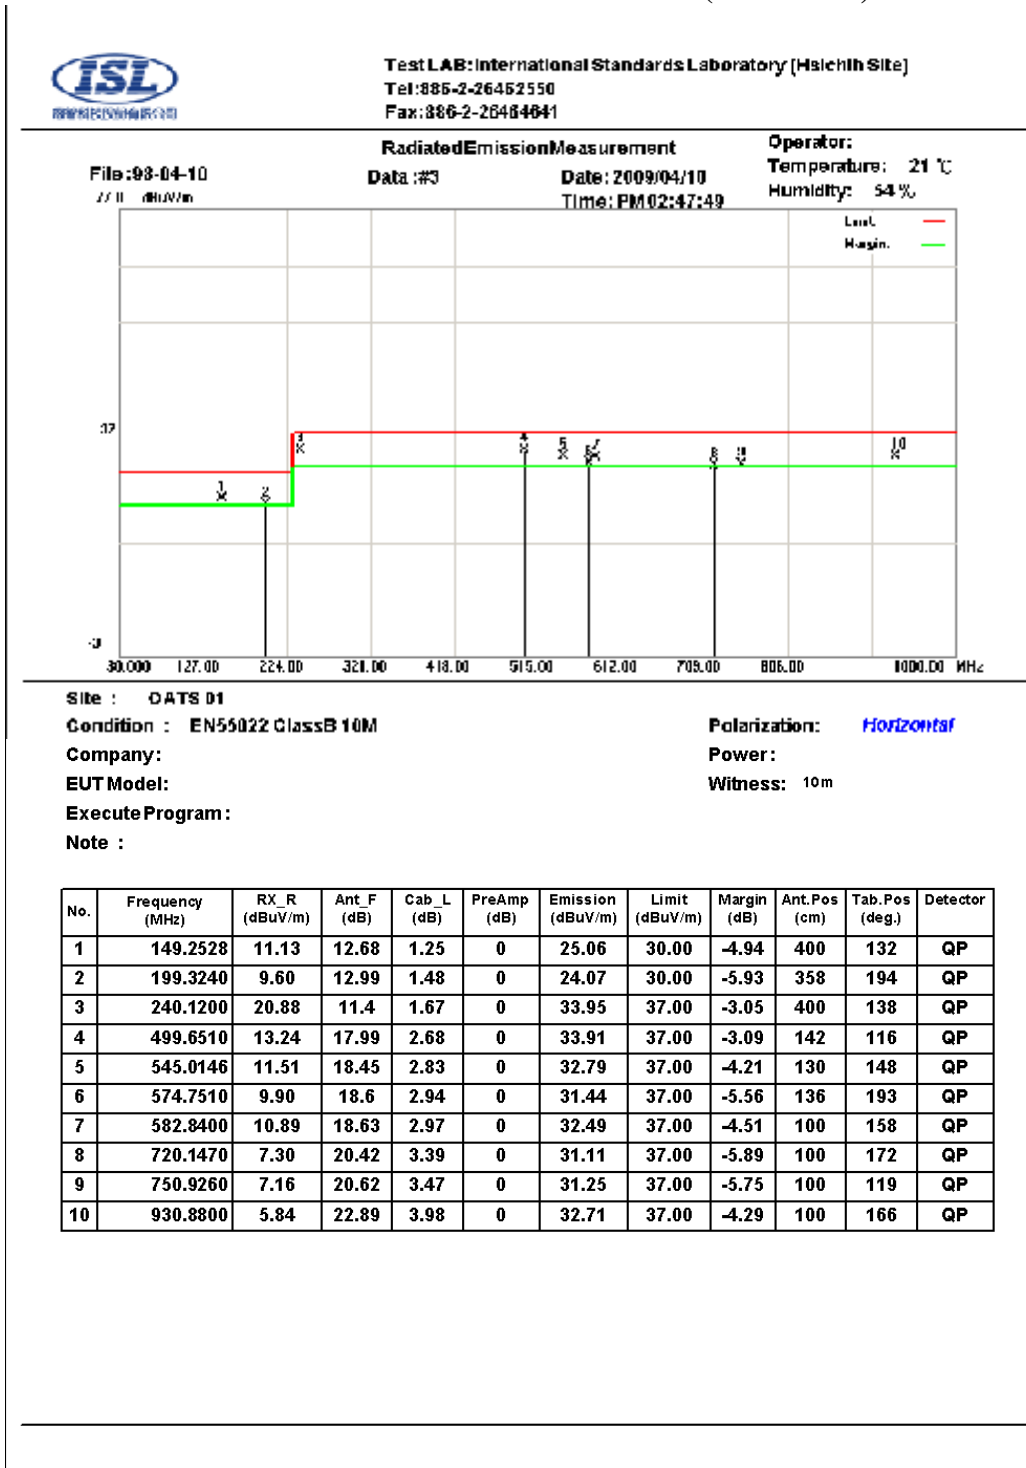

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz


The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26482550
Fax: 886-2-26454641

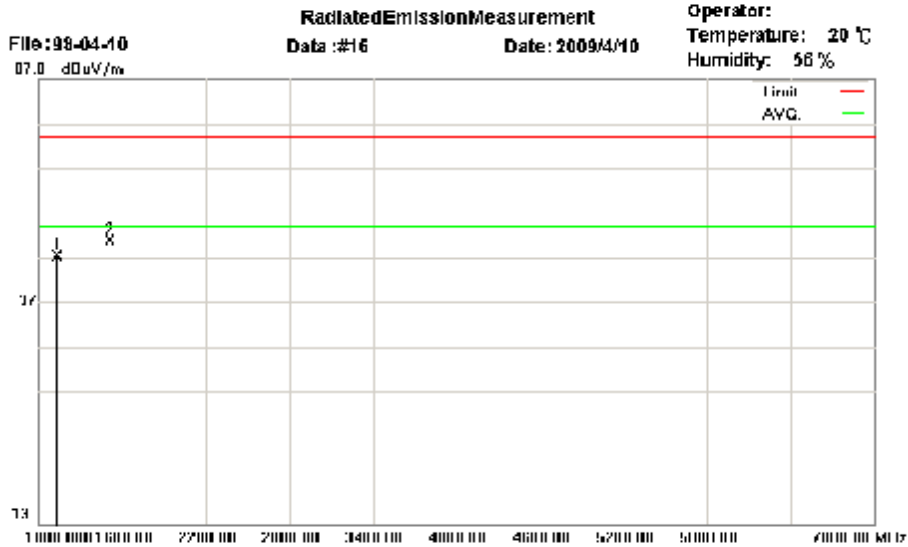

Site : QATS 01 **Polarization:** Horizontal
Condition : FCC Class B Radiation **Power:**
EUT : **Distance:** 3m
Model Name :
Mode :
Note :

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
	1120.503	35.83	24.49	5.24	18.22	47.34	74.00	-26.66	100	149	peak
*	1498.583	37.51	25.4	6.3	18.3	50.91	74.00	-23.09	100	173	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz


Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 5.5.1 Radiated Emissions (Vertical)

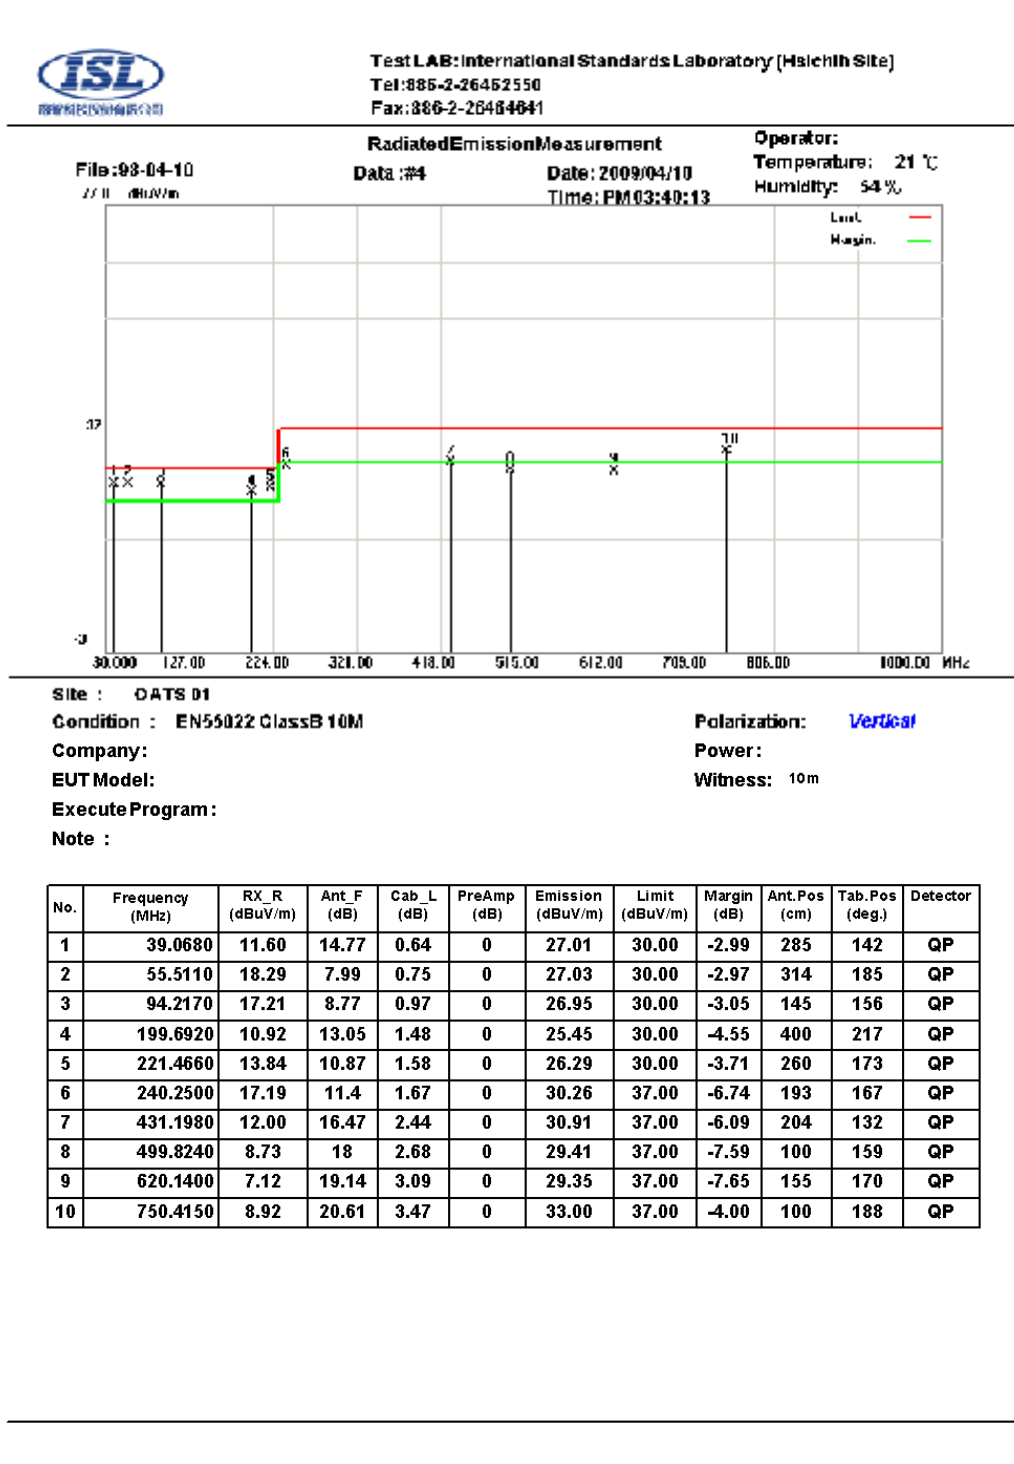

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.



Test LAB: International Standards Laboratory (Hsichih Site)
 Tel: 886-2-26482550
 Fax: 886-2-26454641

File: 98-03-05
 Radiated Emission Measurement
 Data: #17 Date: 2009/4/10
 Operator:
 Temperature: 20 °C
 Humidity: 58 %

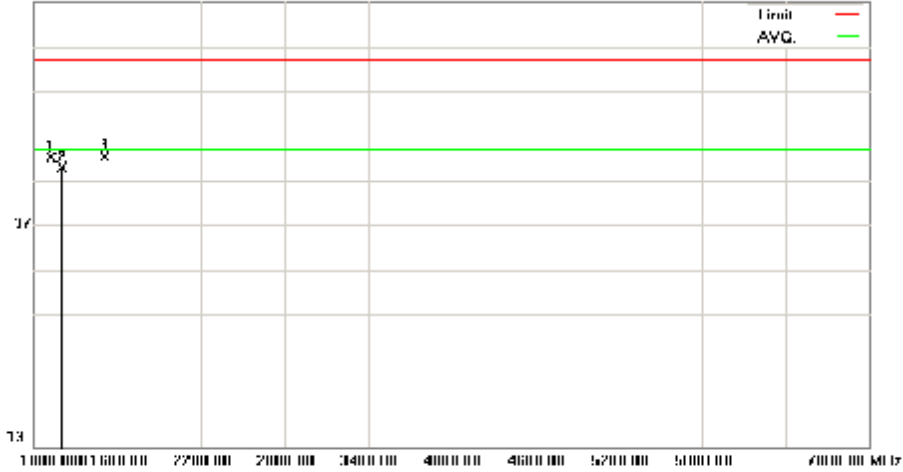

Site : QATS 01
 Condition : FCC Class B Radiation
 Polarization: Vertical
 EUT :
 Power :
 Model Name :
 Distance: 3m
 Mode :
 Note :

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
	1115.710	40.56	24.48	5.22	18.22	52.04	74.00	-21.96	100	342	peak
	1200.500	37.90	24.68	5.46	18.24	49.80	74.00	-24.20	100	286	peak
*	1500.104	39.02	25.4	6.3	18.3	52.42	74.00	-21.58	100	194	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

The CISPR 22 limits would be applied to all FCC Part 15 devices.

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

6. Appendix

6.1 Appendix A: Warning Labels



Label Requirements

A Class B digital device subject to Declaration of Conformity of FCC shall carry a label which includes the following statement:

***** WARNING *****

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The sample label shown shall be permanently affixed at a conspicuous location on the device and be readily visible to the user at the time of purchase.

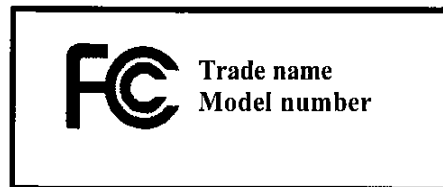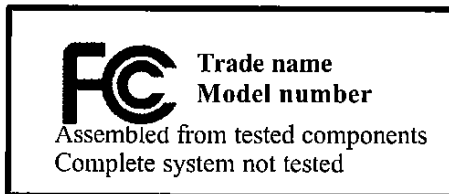



6.2 Appendix B: Warning Statement

Statement Requirements

The operators' manual for a Class B digital device shall contain the following statements or their equivalent:

*** * * W A R N I N G * * ***

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instruction manual may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio TV technician for help.

Notice: The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equivalent.

* * * * *

If the EUT was tested with special shielded cables the operators manual for such product shall also contain the following statements or their equivalent:

Shielded interface cables and/or AC power cord, if any, must be used in order to comply with the emission limits.

6.3 Appendix C: Measurement Procedure for Powerline Conducted Emissions

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

6.4 Appendix D: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

6.5 Appendix E: Test Equipment

6.5.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C1	Harbourindustries	RG400	1F-C1	10/23/2008	10/23/2009
Conduction	Hygro-Thermo Meter 11	N/A	TH-400	ISL-002	02/23/2009	02/23/2010
Conduction	LISN 02	EMCO	3825/2	1407	07/07/2008	07/07/2009
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/010	07/07/2008	07/07/2009
Conduction	ISN T2 03	FCC	FCC-TLISN-T2-02	20618	08/05/2008	08/05/2009
Conduction	ISN T4 05	FCC	FCC-TLISN-T4-02	20619	08/06/2008	08/06/2009
Conduction	ISN T8 03	FCC	FCC-TLINS-T8-02	20620	08/05/2008	08/05/2009
Conduction	EMI Receiver 08	Schwarzbeck Mess-Elektronik	FCKL 1528	1528-202	09/05/2008	09/05/2009
Conduction	Spectrum Analyzer 05	HP	8594EM	3619A00192	02/23/2009	02/23/2010
Radiation	BILOG Antenna 10	Sumol Sciences	JB1	A013004-1	07/24/2008	07/24/2009
Radiation	Coaxial Cable 3F-10M	MIYAZAKI	8D-8F	10M-1	10/23/2008	10/23/2009
Radiation	Coaxial Cable 3F-3M	BELDEN	RG-8/U	3F-3M	10/23/2008	10/23/2009
Radiation	Spectrum Analyzer 12	Advantest	R3132	130200208	03/05/2009	03/05/2010
Radiation	Hygro-Thermo Meter 10	N/A	TH-400	ISL-001	02/23/2009	02/23/2010
Rad. above 1Ghz	Horn Antenna 01	EMCO	3115	9504-4462	11/04/2008	11/04/2009
Rad. above 1Ghz	Horn Antenna 03	COM-Power	AH-826	100A	02/27/2009	02/27/2010
Rad. above 1Ghz	Microwave Cable RF07-3	HUBER+SU HNER AG.	Sucoflex 103	42728/3	07/17/2008	07/17/2009
Rad. above 1Ghz	Preamplifier 01	R&S	ESMI-Z7	1045.502	07/17/2008	07/17/2009
Radiation	Signal Generator 01	HP	8656B	2635A04675	08/21/2008	08/21/2009
Radiation	EMI Receiver 09	Schwarzbeck Mess-Elektronik	FCVU 1534	1534-150	05/08/2008	05/08/2009

6.5.2 Software for Controlling Spectrum/Receiver and Calculating Test Data

Radiation/Conduction	Filename	Version	Issued Date
Hsichih Conduction	EZ EMC	1.1.4.2	2/10/2007


-39- Declaration of Conformity





Hsichih Radiation	EZ EMC	1.1.4.2	1/24/2007
-------------------	--------	---------	-----------

6.6 Appendix F: Layout of EUT and Support Equipment

6.6.1 General Conducted Test Configuration

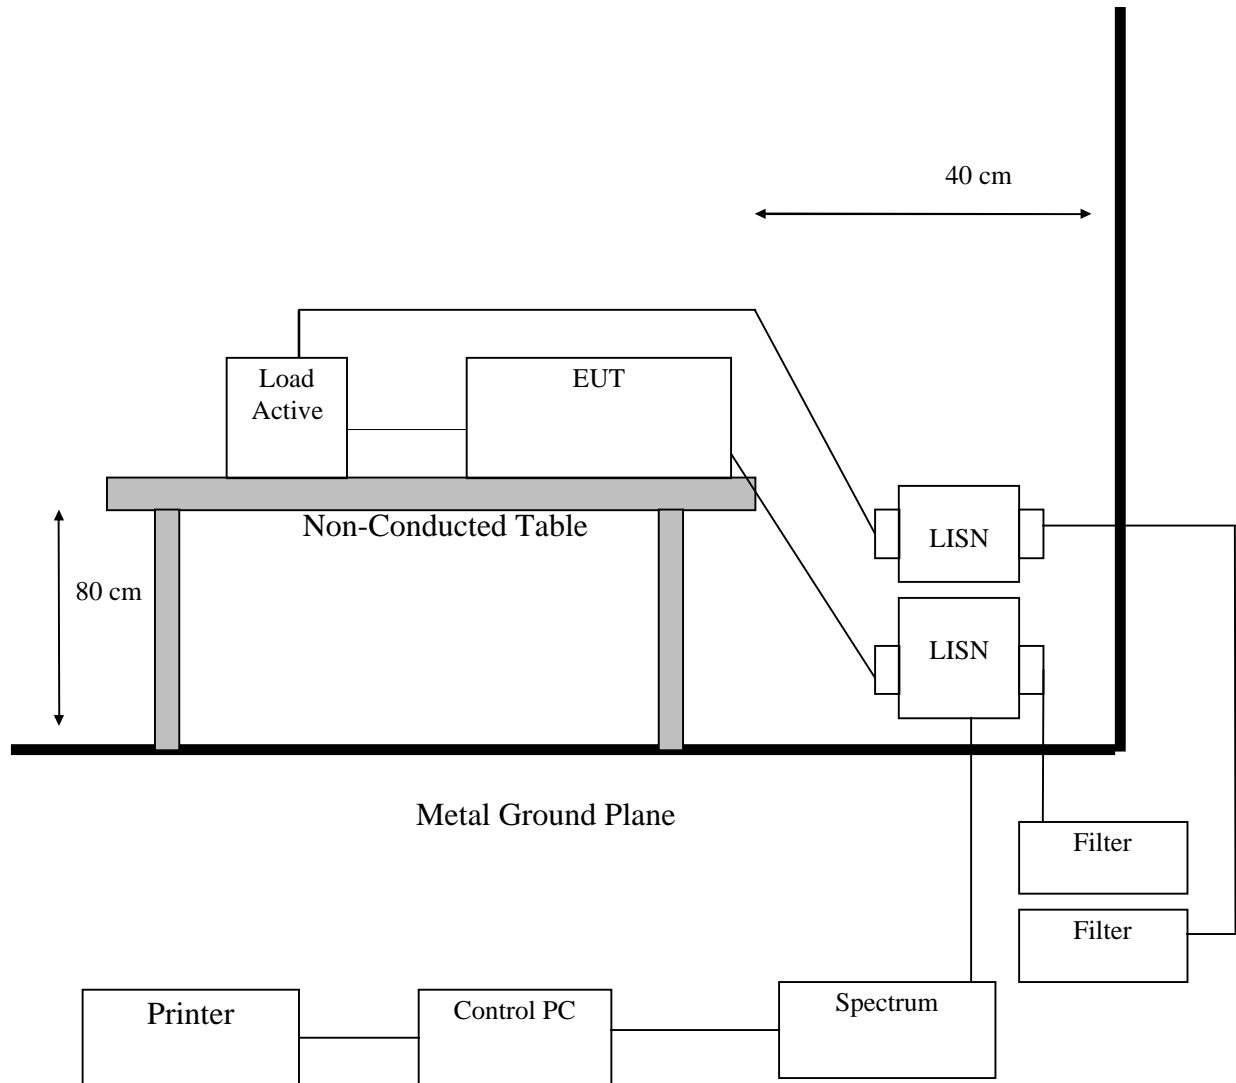

6.6.2 General Radiation Test Configuration

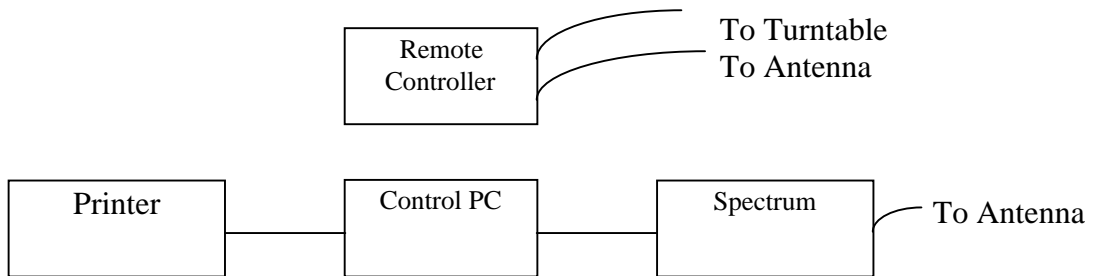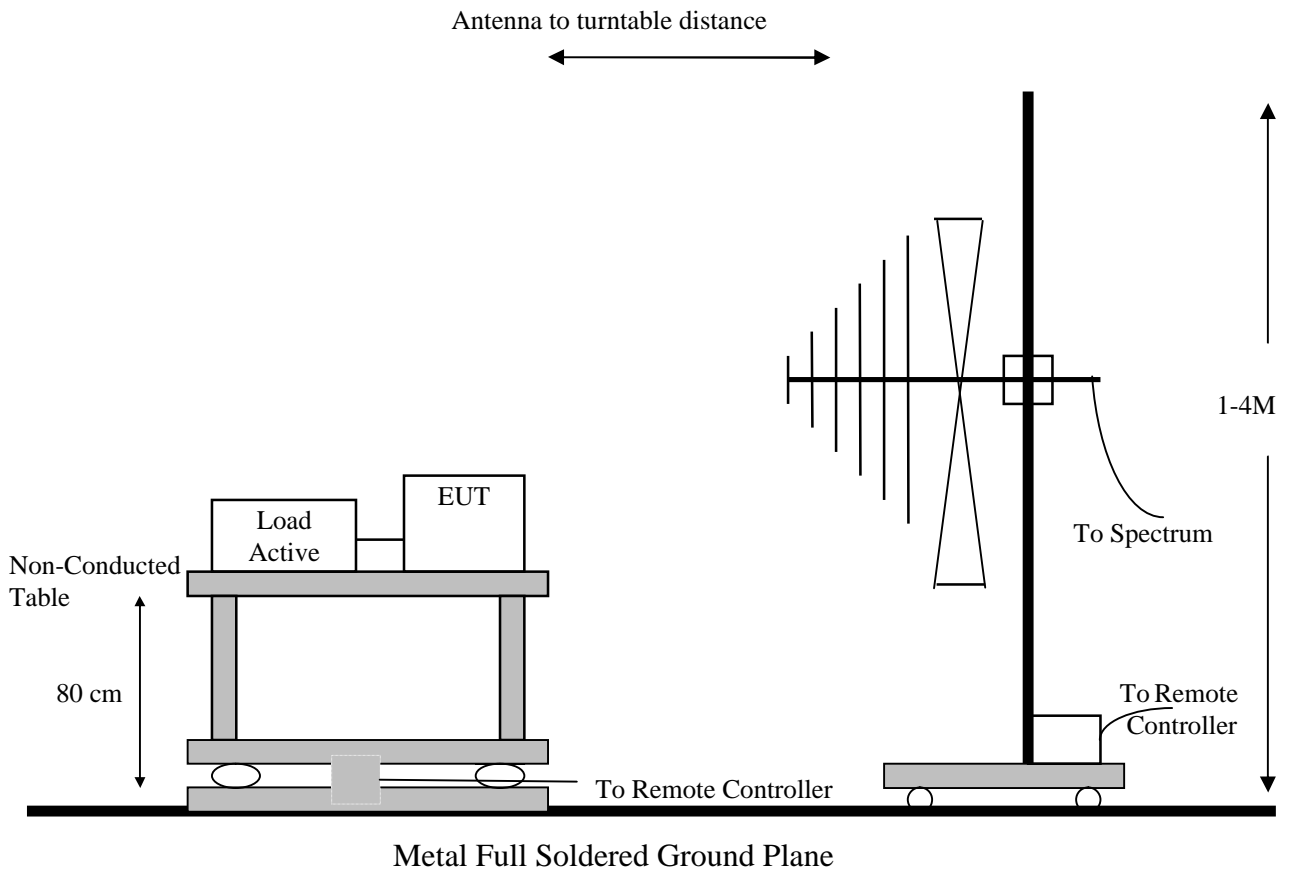

Note: BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz
Horn Antenna Distance: 3 meter, Frequency: 1000MHz-18GHz

6.7 Appendix G: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2003. The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 01>: $\pm 2.946\text{dB}$

<OATS 01 (3M)>

1GHz~18GHz: $\pm 3.343\text{dB}$

18GHz~26GHz: $\pm 3.583\text{dB}$

<OATS 01 (10M)>

30MHz~1GHz: $\pm 2.547\text{dB}$

6.8 Appendix H: Photographs of EUT Configuration Test Set Up


The measurement results along with the appropriate limits for comparison shall be presented in tabular form. If an alternate test method is used, the test report must identify that method and justification for its use shall be provided. Instrumentation, instrument attenuator and bandwidth settings, detector function, EUT arrangements, a sample calculation with all conversion factors and all other pertinent details shall be included along with the measurement results. When automatic scan techniques are used, an explanation of how each emission from the EUT was maximized shall be included in the test report along with the scan rate used to obtain each level.

The justification for selecting a particular EUT configuration and particular length of interface cable to produce maximized emissions must be documented in the test report. Photographs clearly showing the test set-up and interface cable arrangement for the highest radiated and line conducted emission measured shall be included.

The Front View of Highest Conducted Set-up For EUT



The Back View of Highest Conducted Set-up For EUT

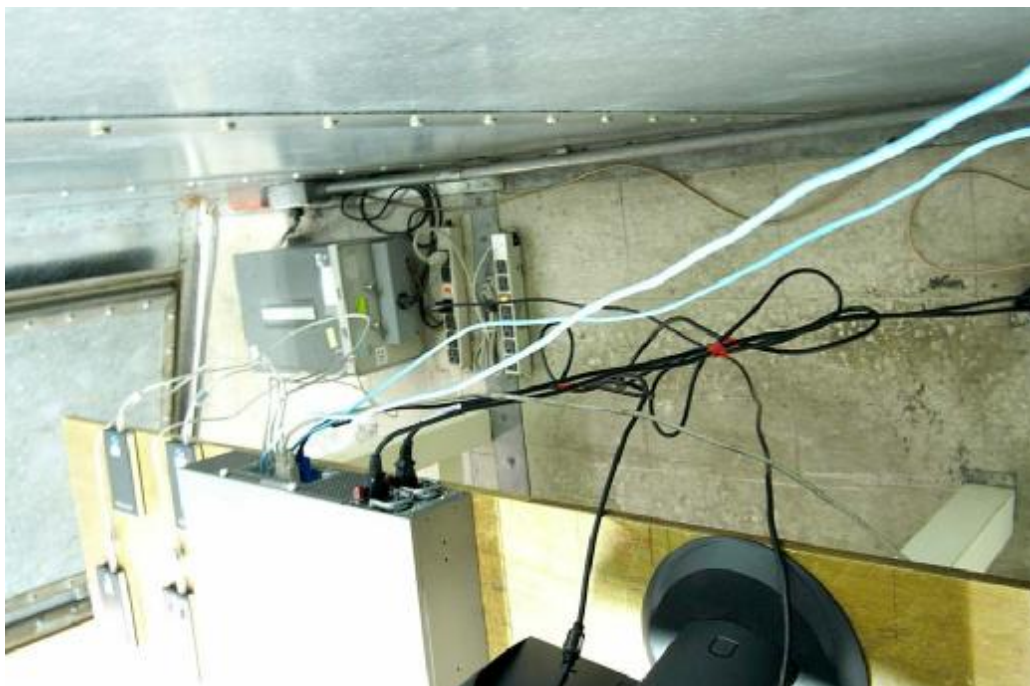

The Front View of Highest Conducted Set-up For EUT



The Back View of Highest Conducted Set-up For EUT



-47- Declaration of Conformity

The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT



-48- Declaration of Conformity

The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT





6.9 Appendix I: Photographs of EUT

Please refer to the File of **ISL-09HE104P**

7. Attachment:

Model Number(s):

TS-809U; TS-809U-RP; TS-809U-SP; TS-809U-G; TS-809U-RP-G; TS-809U-SP-G;
VioStor-8040U-SP; VioStor-8036U-SP; VioStor-8032U-SP; VioStor-8024U-SP;
VioStor-8040U-RP; VioStor-8036U-RP; VioStor-8032U-RP; VioStor-8024U-RP;
NVR-8040U-SP; NVR-8036U-SP; NVR-8032U-SP; NVR-8024U-SP;
NVR-8040U-RP; NVR-8036U-RP; NVR-8032U-RP; NVR-8024U-RP;
NV-8040U-SP; NV-8036U-SP; NV-8032U-SP; NV-8024U-SP; NV-8040U-RP;
NV-8036U-RP; NV-8032U-RP; NV-8024U-RP