


Quick Start

1. Please connect all of the Cables like following.

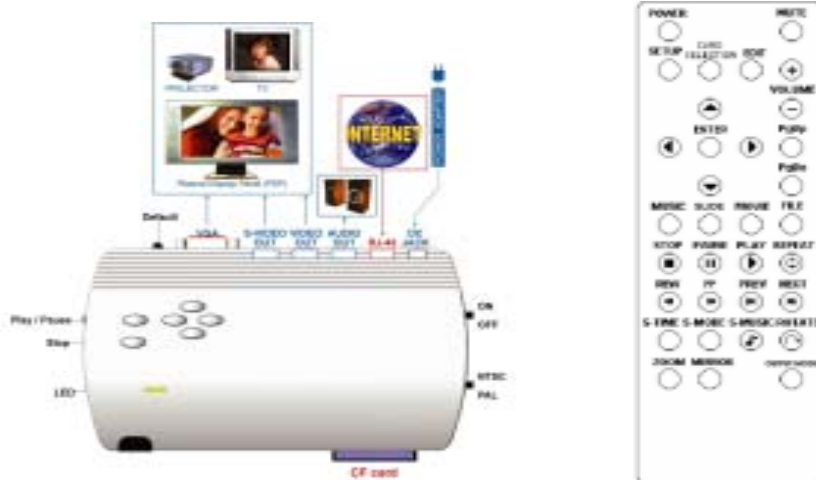

IR SENSOR : Infrared input of remote controller.

POWER ON/OFF and LED : Switch and Power indicative LED

NTSC/PAL : Selects NTSC or PAL video system.

Stop/ Play/Pause : Audio or video display will be stop or restart.

Up/Down/Left/Right : To select item on the OSD Menu.

MUTE, VOLUME/+, VOLUME/- : Change the Volume of Audio

SETUP : Press this button to setup the settings of display.

CARD SELECTION : Not used in this product.

EDIT : Delete, Properties, Rename function

UP/DOWN/LEFT/RIGHT/ ENTER : To select and confirm item on the OSD

PgUP/Do, go to the previous or next page or image.

MUSIC/PHOTO/MOVIE/FILE: Display only music/photo/movie or all files

STOP/ PAUSE/ PLAY/ REPEAT/REW/FF/PREW/NEXT: Playback function

S-TIME : Slide show time adjustment 1; 3; 5,10, 30, 60 seconds.


S-MODE : Slideshow effect with sequential, random etc.....

S-MUSIC : Select the background music when slideshow.

ROTATE/ZOOM/MIRROR : Select the effect of display

OUTPUT MODE : selection video, s-video, YCbCr, YPbPr and VGA output..

2. Plug RJ-45 Cable into your router

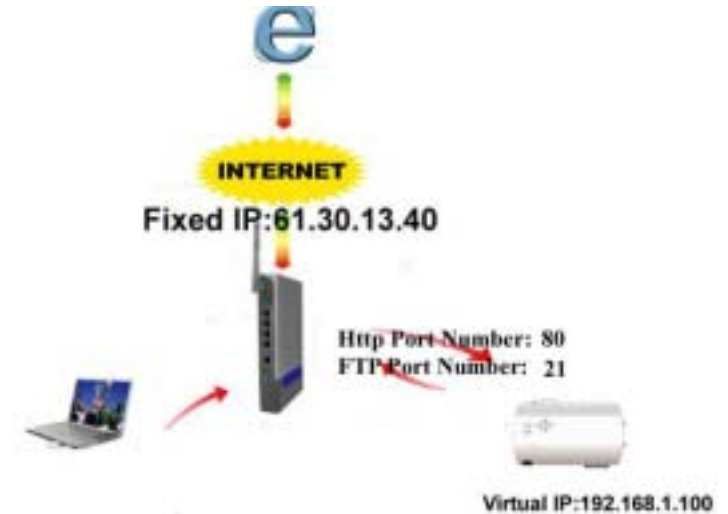

3. Execute the "ipEdit.exe" in the CD." and click "Update".


<http://192.168.1.100/> has been listed in the left side, and double click "...<http://192.168.1.100/>" to login the IP Controller

4. Edit the IP Address, it is depend on your router, if your router IP is 192.168.0.1(use the command : ipconfig to get the imformation),then the IP Media Player need to change to the range "192.168.0.2"~192.168.0.254

5. Default user name: **root**, Default password: **admin**
6. **Please remember to change the IP Address one more time, then the IP address will be stored in the IP Media Player**



7. Select **“Update Media”** to startup ftp server, or select **“Play Media”** to Play file.

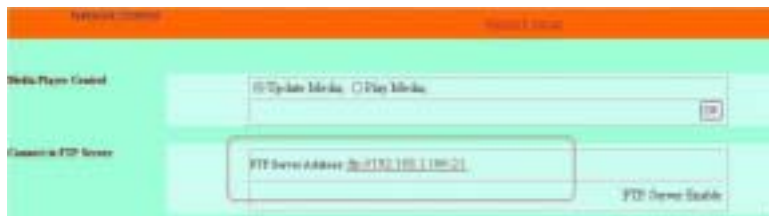

8. Setup the firewall in the router



9. Log in from Internet all over the world:
Execute Internet Explorer and type the Real IP address used by the

- router ex: <http://61.30.13.14:80/> or <http://61.30.13.40/>
10. If you can't connect to the FTP folder,
Please Add or Remove the Item : Internet Explorer->Internet Options->Advanced->Use Passive FTP (for firewall and DSL modem compatibility) then close the FTP Folder and try one more time



- If you also can't connect to the FTP folder, please refer to the Help **4.3 Limitation of FTP Protocol** on the CD