

Certificate

Issue Date: June 15, 2012
Ref. Report No. ISL-12HE167CE

Product Name : Network Attached Storage
Models : TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII; NAS-469UG-RP;
NAS-469UG; TS-469UGII-RP; NAS-469UIIG; VS-4004U-RP Pro;
VS-4008U-RP Pro; VS-4012U-RP Pro; VS-4016U-RP Pro; VS-4020U-RP Pro;
VS-4024U-RP Pro; NVR-4004U-RP Pro; NVR-4008U-RP Pro;
NVR-4012U-RP Pro; NVR-4016U-RP Pro; NVR-4020U-RP Pro;
NVR-4024U-RP Pro; NVR-4004UG-RP; NVR-4008UG-RP;
NVR-4012UG-RP; NVR-4016UG-RP; NVR-4020UG-RP; NVR-4024UG-RP;
VS-4000U-RP Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802;
TS-469U-SP; NAS-469UG-SP; TS-469UII-SP; NAS-469UGII-SP
Brand : **QNAP**
Responsible Party : **QNAP Systems, Inc.**
Address : 2F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :




Standards:

EN 55022: 2010 and CISPR 22: 2008 (modified)
EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009
EN 61000-3-3: 2008 and IEC 61000-3-3: 2008
EN 55024: 2010 and CISPR 24: 2010
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and
IEC 61000-4-3:2006+A1: 2007+A2: 2010
EN 61000-4-4: 2004 +A1:2010 and IEC 61000-4-4: 2004 +A1:2010
EN 61000-4-5: 2006 and IEC 61000-4-5: 2005
EN 61000-4-6: 2009 and IEC 61000-4-6: 2008
EN 61000-4-8: 2010 and IEC 61000-4-8: 2009
EN 61000-4-11: 2004 and IEC 61000-4-11: 2004

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory


Jim Chu / Director

☒ **Hsi-Chih LAB:**

No. 65, Gu Dai Keng St., Hsichih District,
New Taipei City 22117, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



CE MARK TECHNICAL FILE

AS/NZS EMC CONSTRUCTION FILE

of

Product Name

Network Attached Storage

Models

**TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII;
NAS-469UG-RP; NAS-469UG; TS-469UGII-RP; NAS-469UIIG;
VS-4004U-RP Pro; VS-4008U-RP Pro; VS-4012U-RP Pro;
VS-4016U-RP Pro; VS-4020U-RP Pro; VS-4024U-RP Pro;
NVR-4004U-RP Pro; NVR-4008U-RP Pro; NVR-4012U-RP Pro;
NVR-4016U-RP Pro; NVR-4020U-RP Pro; NVR-4024U-RP Pro;
NVR-4004UG-RP; NVR-4008UG-RP; NVR-4012UG-RP;
NVR-4016UG-RP; NVR-4020UG-RP; NVR-4024UG-RP;
VS-4000U-RP Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802;
TS-469U-SP; NAS-469UG-SP; TS-469UII-SP; NAS-469UGII-SP**

Brand

QNAP

Contains:

1. Declaration of Conformity
2. EN55022/CISPR 22, AS/NZS CISPR 22 EMI test report
3. EN55024/CISPR 24, EN61000-3-2 / IEC 61000-3-2, and EN61000-3-3 / IEC 61000-3-3 test report
4. Certificate of EN60950-1
5. Block Diagram and Schematics
6. Users' manual

Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 2F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

Declares that product: Network Attached Storage

Models: TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII; NAS-469UG-RP; NAS-469UG; TS-469UGII-RP; NAS-469UIIG; VS-4004U-RP Pro; VS-4008U-RP Pro; VS-4012U-RP Pro; VS-4016U-RP Pro; VS-4020U-RP Pro; VS-4024U-RP Pro; NVR-4004U-RP Pro; NVR-4008U-RP Pro; NVR-4012U-RP Pro; NVR-4016U-RP Pro; NVR-4020U-RP Pro; NVR-4024U-RP Pro; NVR-4004UG-RP; NVR-4008UG-RP; NVR-4012UG-RP; NVR-4016UG-RP; NVR-4020UG-RP; NVR-4024UG-RP; VS-4000U-RP Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802; TS-469U-SP; NAS-469UG-SP; TS-469UII-SP; NAS-469UGII-SP

Brand: QNAP

Assembled by: Same as above

Address: Same as above

Conforms to the EMC Directive 2004/108/EC as attested by conformity with the following harmonized standards:

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A

<to be continued>

Standard	Description	Results	Criteria
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

Conforms to the Low Voltage Directive 2006/95/EC, 93/68/EEC as attested by conformity with the following harmonized standard:

EN60950-1:2006+A11:2009: Safety of Information Technology Equipment
Including electrical business equipment

We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.

QNAP Systems, Inc.

Date: June 15, 2012

Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 2F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

Declares that product: Network Attached Storage

Models: TS-469U-RP; TS-469U; TS-469U-II-RP; TS-469U-II; NAS-469UG-RP; NAS-469UG; TS-469UG-II-RP; NAS-469U-II; VS-4004U-RP Pro; VS-4008U-RP Pro; VS-4012U-RP Pro; VS-4016U-RP Pro; VS-4020U-RP Pro; VS-4024U-RP Pro; NVR-4004U-RP Pro; NVR-4008U-RP Pro; NVR-4012U-RP Pro; NVR-4016U-RP Pro; NVR-4020U-RP Pro; NVR-4024U-RP Pro; NVR-4004UG-RP; NVR-4008UG-RP; NVR-4012UG-RP; NVR-4016UG-RP; NVR-4020UG-RP; NVR-4024UG-RP; VS-4000U-RP Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802; TS-469U-SP; NAS-469UG-SP; TS-469U-II-SP; NAS-469UG-II-SP

Brand: QNAP

Assembled by: Same as above

Address: Same as above

Conforms to the C-Tick Mark requirement as attested by conformity with the following standards:

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A

<to be continued>

Standard	Description	Results	Criteria
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.

QNAP Systems, Inc.

Date: June 15, 2012

CE TEST REPORT

of

EN55022 / CISPR 22 / AS/NZS CISPR 22

Class A

EN55024 / CISPR 24 / IMMUNITY

EN61000-3-2 / EN61000-3-3

Product : **Network Attached Storage**

Models: **TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII;
NAS-469UG-RP; NAS-469UG; TS-469UGII-RP;
NAS-469UIIG; VS-4004U-RP Pro; VS-4008U-RP
Pro; VS-4012U-RP Pro; VS-4016U-RP Pro;
VS-4020U-RP Pro; VS-4024U-RP Pro;
NVR-4004U-RP Pro; NVR-4008U-RP Pro;
NVR-4012U-RP Pro; NVR-4016U-RP Pro;
NVR-4020U-RP Pro; NVR-4024U-RP Pro;
NVR-4004UG-RP; NVR-4008UG-RP;
NVR-4012UG-RP; NVR-4016UG-RP;
NVR-4020UG-RP; NVR-4024UG-RP; VS-4000U-RP
Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802;
TS-469U-SP; NAS-469UG-SP; TS-469UII-SP;
NAS-469UGII-SP**

Brand: **QNAP**

Applicant: **QNAP Systems, Inc.**

Address: **2F, No.22, Zhongxing Rd., Xizhi Dist., New
Taipei City 221, Taiwan**

Test Performed by:

International Standards Laboratory

<Hsi-Chih LAB>

*Site Registration No.

BSMI:SL2-IN-E-0037; SL2-R1/R2-E-0037; TAF: 1178;

IC: IC4067A-1; VCCI: R-341,C-354, T-1749, G-443; NEMKO: ELA 113A

*Address:

No. 65, Gu Dai Keng St.

Hsichih District, New Taipei City 22179, Taiwan

*Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Report No.: **ISL-12HE167CE**

Issue Date : **June 15, 2012**

This report totally contains 54 pages including this cover page and contents page.

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data	1
1.2	Test Standards	2
1.3	Description of EUT	3
1.4	Description of Support Equipment	7
1.5	Software for Controlling Support Unit.....	8
1.6	I/O Cable Condition of EUT and Support Units	9
2.	Power Main Port Conducted Emissions	10
2.1	Test Setup and Procedure	10
2.1.1	Test Setup	10
2.1.2	Test Procedure	10
2.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	10
2.2	Conduction Test Data: Configuration 1	11
3.	Telecommunication Port Conducted Emissions	13
3.1	Test Setup and Procedure	13
3.1.1	Test Setup	13
3.1.2	Test Procedure	13
3.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	13
3.2	Test Data: LAN--10M: Configuration 1.....	14
3.3	Test Data: LAN--100M: Configuration 1.....	15
3.4	Test Data: LAN--GIGA: Configuration 1	16
3.5	Test Data: LAN--10M: Configuration 2.....	17
3.6	Test Data: LAN--100M: Configuration 2.....	18
3.7	Test Data: LAN--GIGA: Configuration 2	19
4.	Radiated Disturbance Emissions	20
4.1	Test Setup and Procedure	20
4.1.1	Test Setup	20
4.1.2	Test Procedure	20
4.1.3	Spectrum Analyzer Configuration (for the frequencies tested)	21
4.2	Radiation Test Data: Configuration 1.....	22
5.	Electrostatic discharge (ESD) immunity	26
5.1	Test Specification	26
5.2	Test Setup	26
5.3	Test Result	26
6.	Radio-Frequency, Electromagnetic Field immunity.....	28
6.1	Test Specification	28
6.2	Test Setup	28
6.3	Test Result	28
7.	Electrical Fast transients/burst immunity	29
7.1	Test Specification	29
7.2	Test Setup	30
7.3	Test Result	30
8.	Surge Immunity	31
8.1	Test Specification	31
8.2	Test Setup	31
8.3	Test Result	31
9.	Immunity to Conductive Disturbance.....	32
9.1	Test Specification	32
9.2	Test Setup	32

9.3	Test Result	32
10.	Power Frequency Magnetic Field immunity	33
10.1	Test Specification.....	33
10.2	Test Setup.....	33
10.3	Test Result.....	33
11.	Voltage Dips, Short Interruption and Voltage Variation immunity	34
11.1	Test Specification.....	34
11.2	Test Setup.....	34
11.3	Test Result.....	34
12.	Harmonics	35
12.1	Test Specification.....	35
12.2	Test Setup.....	35
12.3	Test Result.....	35
13.	Voltage Fluctuations	36
13.1	Test Specification.....	36
13.2	Test Setup.....	36
13.3	Test Result.....	36
14.	Appendix.....	38
14.1	Appendix A: Test Equipment.....	38
14.1.1	Test Equipment List.....	38
14.1.2	Software for Controlling Spectrum/Receiver and Calculating Test Data.....	40
14.2	Appendix B: Uncertainty of Measurement	41
14.3	Appendix C: Photographs of EUT Configuration Test Set Up.....	43
14.3.1	Photo of Main Power Port Conducted Emission and Telecommunication Port Conducted Emission Measurement	43
14.3.2	Photo of Radiated Emission Measurement	45
14.3.3	Photo of ESD Measurement	47
14.3.4	Photo of RF Field Strength Susceptibility Measurement.....	47
14.3.5	Photo of Electrical Fast Transient/Burst Measurement	48
14.3.6	Photo of Surge Measurement.....	48
14.3.7	Photo of Conductive Measurement.....	49
14.3.8	Photo of Magnetic field Measurement.....	49
14.3.9	Photo of Voltage Dips Measurement.....	50
14.3.10	Photo of Harmonics and Voltage Fluctuations	50
14.4	Appendix D: Photographs of EUT Please refer to the File of ISL-12HE167P.....	51

1. General

1.1 Certification of Accuracy of Test Data

Standards: Please refer to 1.2

Equipment Tested: Network Attached Storage

Models: TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII;
NAS-469UG-RP; NAS-469UG; TS-469UGII-RP;
NAS-469UIIG; VS-4004U-RP Pro; VS-4008U-RP Pro;
VS-4012U-RP Pro; VS-4016U-RP Pro; VS-4020U-RP Pro;
VS-4024U-RP Pro; NVR-4004U-RP Pro; NVR-4008U-RP Pro;
NVR-4012U-RP Pro; NVR-4016U-RP Pro; NVR-4020U-RP
Pro; NVR-4024U-RP Pro; NVR-4004UG-RP;
NVR-4008UG-RP; NVR-4012UG-RP; NVR-4016UG-RP;
NVR-4020UG-RP; NVR-4024UG-RP; VS-4000U-RP Pro;
NVR-4000U-RP Pro; NVR-4000UG; QR802; TS-469U-SP;
NAS-469UG-SP; TS-469UII-SP; NAS-469UGII-SP

Brand: QNAP

Applicant: QNAP Systems, Inc.

Sample received Date: June 1, 2012

Final test Date: EMI: refer to the date of test data
EMS: June 13, 2012

Test Site: International Standards Laboratory
OATS 01; Chamber 01; Conduction 01; Immunity01

Test Distance: 10M; 3M (above1GHz) (EMI test)


Temperature: refer to each site test data


Humidity: refer to each site test data

Input power: Conduction input power: AC 230 V / 50 Hz
Radiation input power: AC 230 V / 50 Hz
Immunity input power: AC 230 V / 50 Hz

Test Result: PASS

Report Engineer: Winnie Huang

Test Engineer: 
Louis Yu

Approved By: 
Eddy Hsiung

1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the following

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Class A: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

1.3 Description of EUT

EUT

Product Name	Network Attached Storage
Condition	Pre-Production
Model Numbers	TS-469U-RP; TS-469U; TS-469UII-RP; TS-469UII; NAS-469UG-RP; NAS-469UG; TS-469UGII-RP; NAS-469UIIG; VS-4004U-RP Pro; VS-4008U-RP Pro; VS-4012U-RP Pro; VS-4016U-RP Pro; VS-4020U-RP Pro; VS-4024U-RP Pro; NVR-4004U-RP Pro; NVR-4008U-RP Pro; NVR-4012U-RP Pro; NVR-4016U-RP Pro; NVR-4020U-RP Pro; NVR-4024U-RP Pro; NVR-4004UG-RP; NVR-4008UG-RP; NVR-4012UG-RP; NVR-4016UG-RP; NVR-4020UG-RP; NVR-4024UG-RP; VS-4000U-RP Pro; NVR-4000U-RP Pro; NVR-4000UG; QR802; TS-469U-SP; NAS-469UG-SP; TS-469UII-SP; NAS-469UGII-SP
Serial Number	N/A
Power Supply	one- DELTA (Model: RPS-500-18 C) DC Output: +12V 15.8A +5V 8A +3.3V 6A +5VSB 2A MAX.POWER 250W Included: DELTA (Model: DPS-250AB-81 A)*2 AC Input: 100-240V~ 5A-2.5A,50-60Hz DC Output: +12V 20A +5VSB 2A MAX.POWER 250W
CPU	Intel Atom™ Processor D2700
Motherboard	Model: TS-869U V20
SATA Board	Model: TS469U 6G BP V11
Power Switch Button	one
SATA Hard Disk	Western Digital (Model: WD5000AZRX-00A8LB0) 500GB *4
Memory	ADATA 1GB DDR3-1333MHz
USB Flash	one
USB 2.0 Port	five 4-pins
USB 3.0 Port	two 9-pins
E-SATA Port	two 7-pins
RJ45 Port	two 8-pins (10/100/1000M bps)
D-Sub Port	one 15-pins
HDMI Port	one 19-pins
AC Power Port	one 3-pins
AC Power Core	Non-shielded, Detachable (with ground pin)
Maximum Operating Frequency	2.13GHz

Radiation & Conduction & EMS Test Configurations:
RJ45 *2 used (1000Mbps)

ISN Test Configurations:

Configurations	RJ45 Port
1	Port1
2	Port2

Model Difference

Model	Package	Selling markets
TS-469U-RP	Carton Box	Commercial storage related products supply chain management (Accessory box)
TS-469U	Carton Box	Commercial storage related products supply chain management (No accessory box ,No slide rail)
TS-469UII-RP	Carton Box	Commercial storage related products supply chain management (accessory box, slide rail)
TS-469UII	Carton Box	Commercial storage related products supply chain management (slide rail)
NAS-469UG-RP	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan (accessory box)
NAS-469UG	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan (No accessory box ,No slide rail)
TS-469UGII-RP	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan (accessory box, slide rail)
NAS-469UIIG	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan (slide rail)
VS-4004U-RP Pro	Carton Box	Household Monitor storage related products supply chain management
VS-4008U-RP Pro	Carton Box	General Monitor storage related products supply chain management
VS-4012U-RP Pro	Carton Box	Commercial Monitor storage related products supply chain management
VS-4016U-RP Pro	Carton Box	Professional Monitor storage related products supply chain management
VS-4020U-RP Pro	Carton Box	Industrial Monitor storage related products supply chain management
VS-4024U-RP Pro	Carton Box	Considerable Monitor storage related products supply chain management
NVR-4004U-RP Pro	Carton Box (No QNAP Logo)	Household Monitor storage Tender product
NVR-4008U-RP Pro	Carton Box (No QNAP Logo)	General Monitor storage Tender product
NVR-4012U-RP Pro	Carton Box (No QNAP Logo)	Commercial Monitor storage Tender product
NVR-4016U-RP Pro	Carton Box (No QNAP Logo)	Professional Monitor storage Tender product
NVR-4020U-RP Pro	Carton Box (No QNAP Logo)	Industrial Monitor storage Tender product
NVR-4024U-RP Pro	Carton Box (No QNAP Logo)	Considerable Monitor storage Tender product
NVR-4004UG-RP	Carton Box (No QNAP Logo)	Household Monitor storage Cooperation plan
NVR-4008UG-RP	Carton Box (No QNAP Logo)	General Monitor storage Cooperation plan
NVR-4012UG-RP	Carton Box (No QNAP Logo)	Commercial Monitor storage Cooperation plan
NVR-4016UG-RP	Carton Box (No QNAP Logo)	Professional Monitor storage Cooperation plan
NVR-4020UG-RP	Carton Box (No QNAP Logo)	Industrial Monitor storage Cooperation plan
NVR-4024UG-RP	Carton Box (No QNAP Logo)	Considerable Monitor storage Cooperation plan
VS-4000U-RP Pro	Carton Box (No QNAP Logo)	General Professional Monitor storage related products supply chain management
NVR-4000U-RP Pro	Carton Box (No QNAP Logo)	General Professional Monitor storage Tender product
NVR-4000UG	Carton Box (No QNAP Logo)	General Professional Image storage Cooperation plan
QR802	Fujitsu Color Box	Fujitsu storage related products supply chain management
TS-469U-SP	Carton Box	Commercial storage related products supply chain management

NAS-469UG-SP	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan
TS-469UII-SP	Carton Box	Commercial storage related products supply chain management
NAS-469UGII-SP	Carton Box (No QNAP Logo)	Commercial Storage equipment Tender and Cooperation plan

EMI Noise Source

Motherboard Crystal	32.768KHz (X1), 14.318MHz (X2), 25MHz (X3), 1MHz (U8), 25MHz (Y1), 25MHz (Y2), 27MHz (Y3)
SATA Board Crystal	25MHz (Y1), 25MHz (Y2)
USB Flash Crystal	12MHz (Y1)

EMI Solution

N/A

1.4 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
USB2.0 External HDD Enclosure*5	RD1000 S/N: N/A	DELL	Non-Shielded, Detachable	FCC DOC
USB3.0 External HDD Enclosure*2	WDBACY5000ABK-PESN S/N: XH1E31FSV80	WD	Non-Shielded, Detachable	FCC DOC
E-SATA Hard Disk*2	NST-200SU-BK S/N:N/A	NexStar	Non-shielded, Detachable	FCC DOC
Notebook Personal Computer	Latitude D400 S/N: N/A	DELL	Non-shielded, Detachable	FCC DOC
Rack mountable Switch	DGS-1008D	D-Link	Non-shielded, Detachable	FCC DOC
24" LCD Monitor*2	U2410	DELL	Non-Shielded, Detachable	FCC DOC

1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Send EUT Information to the video port device (LCD Monitor).
- B. Read and write to the disk drives.
- C. Send package to the Router RJ45 port (Router).
- D. Receive and transmit package of EUT to the Rack mountable Switch HUB through RJ45 port.
- E. Used Tfggen.exe or ping.exe to send signal to EUT RJ45 port through Notebook RJ45 Port.
- F. Read and write data in the USB2.0 Hard Disk through EUT USB2.0 port.
- G. Read and write data in the USB3.0 Hard Disk through EUT USB3.0 port.
- H. Read and write data in the E-SATA Hard Disk through EUT E-SATA port.
- I. Search External HDD from PC RJ45 to EUT RJ45 with Finder.exe.
- J. Repeat the above steps.

	Filename	Issued Date
USB2.0 External HDD Enclosure	InterEMC.exe	9/04/2000
USB3.0 External HDD Enclosure	InterEMC.exe	9/04/2000
E-SATA External HDD Enclosure	InterEMC.exe	9/04/2000
RJ45	ping.exe	05/05/1999
RJ45	Tfggen.exe	06/23/1999
EUT	Finder.exe	11/15/2008
EUT Hard Disk	InterEMC.exe	9/04/2000


1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord*2	110V (~240V) to EUT SPS	1.8M	Non-shielded, Detachable	Plastic Head
USB Data Cable*5	USB2.0 External HDD Enclosure USB 2.0Port to EUT USB 2.0Port	2M	Shielded, Detachable (With Core)	Metal Head
USB3.0 Data Cable*2	USB3.0 External HDD Enclosure USB 3.0 Port to EUT USB 3.0Port	1M	Shielded, Detachable	Metal Head
E-SATA Data Cable*2	E-SATA External HDD Enclosure E-SATA Port to EUT E-SATA Port	1M	Non-Shielded, Detachable	Plastic Head
RJ45 Data Cable*2	EUT RJ45 Port to Switch HUB RJ45 Port	10M	Non-shielded, Detachable	RJ-45, with Plastic Head
RJ45 Data Cable	Switch HUB RJ45 port to Notebook RJ45 Port	1M	Non-shielded, Detachable	RJ-45, with Plastic Head
Display Data Cable	EUT D-sub Port to LCD Monitor D-sub Port	1.98M	Shielded, Detachable (With Core)	Metal Head
Display Data Cable	EUT HDMI Port to LCD Monitor HDMI Port	1. 8M	Shielded, Detachable	Metal Head

2. Power Main Port Conducted Emissions

2.1 Test Setup and Procedure

2.1.1 Test Setup

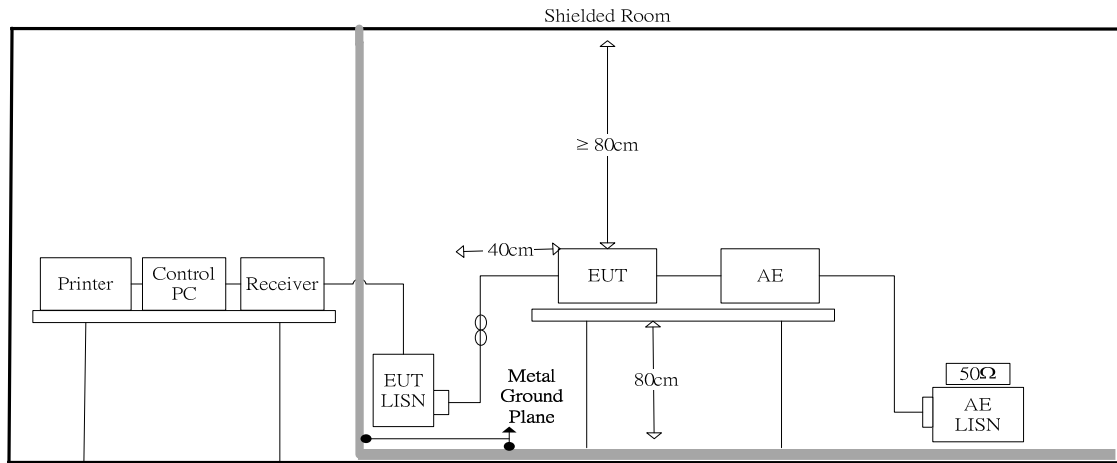

2.1.2 Test Procedure

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, were measured.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

2.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

2.2 Conduction Test Data: Configuration 1

Table 2.2.1 Power Line Conducted Emissions (Hot)

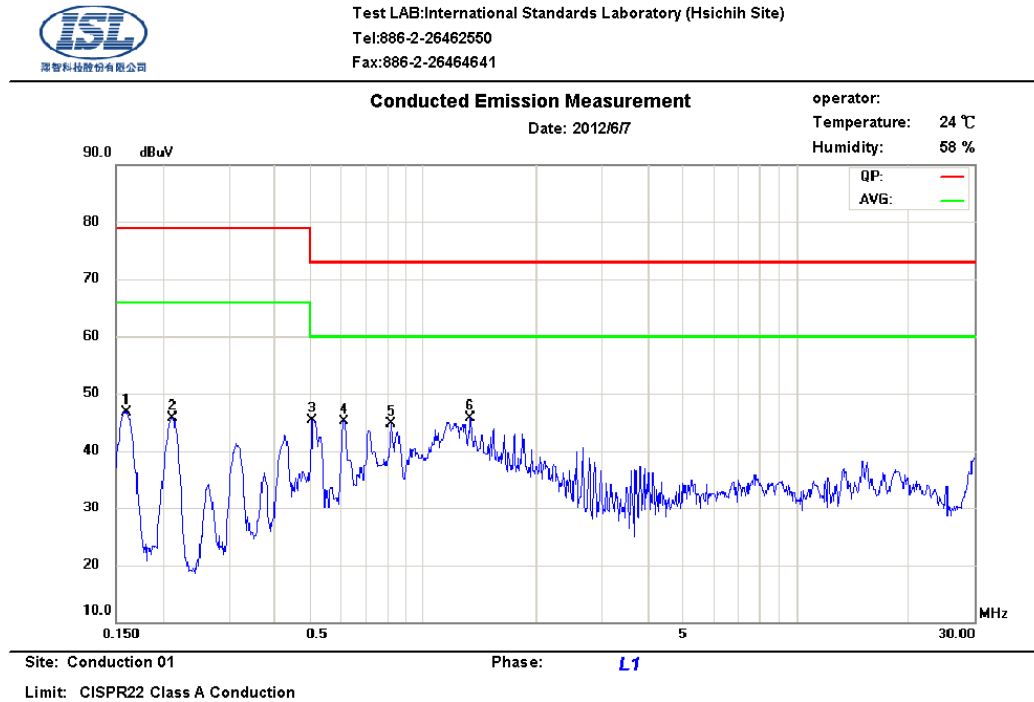

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1601	0.29	0.01	44.93	79.00	-34.07	35.83	66.00	-30.17	
2	0.2123	0.28	0.01	43.34	79.00	-35.66	36.69	66.00	-29.31	
3	0.5090	0.29	0.04	36.19	73.00	-36.81	32.45	60.00	-27.55	
4	0.6125	0.30	0.05	37.81	73.00	-35.19	34.25	60.00	-25.75	
5	0.8195	0.30	0.06	37.29	73.00	-35.71	33.69	60.00	-26.31	
6	1.3414	0.33	0.08	34.08	73.00	-38.92	28.17	60.00	-31.83	

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

Table 2.2.2 Power Line Conducted Emissions (Neutral)



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

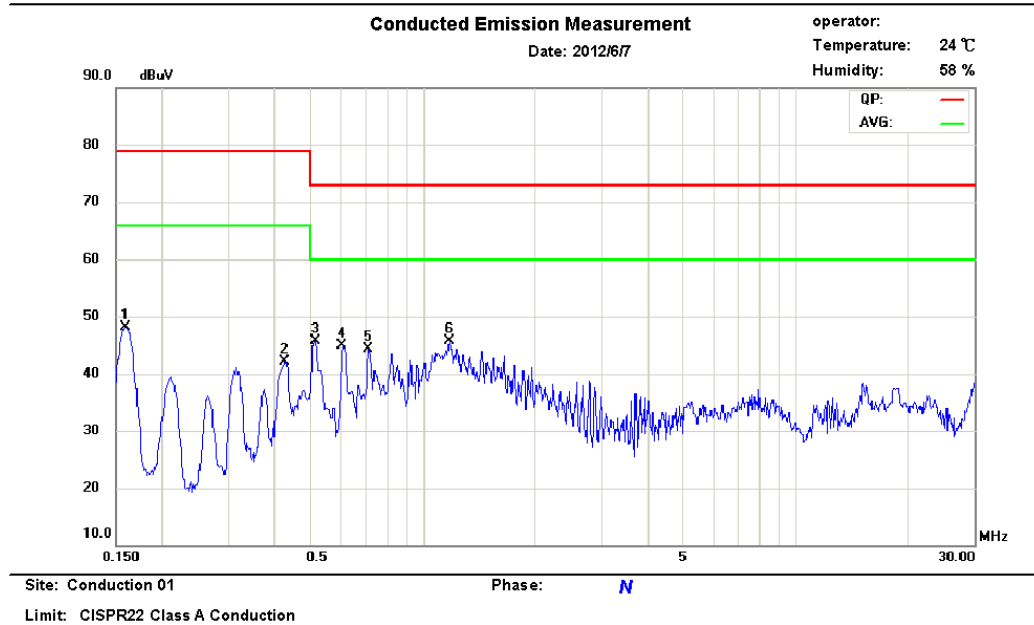

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1583	0.13	0.01	45.87	79.00	-33.13	36.32	66.00	-29.68	
2	0.4254	0.14	0.03	36.17	79.00	-42.83	33.86	66.00	-32.14	
3	0.5134	0.14	0.04	43.62	73.00	-29.38	39.72	60.00	-20.28	
4	0.6124	0.14	0.05	36.96	73.00	-36.04	33.44	60.00	-26.56	
5	0.7160	0.14	0.05	36.98	73.00	-36.02	32.69	60.00	-27.31	
6	1.1750	0.15	0.08	38.55	73.00	-34.45	34.08	60.00	-25.92	

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.1 Test Setup and Procedure

The diagram illustrates the experimental setup for the EUT in the Shielded Room. The setup includes the following components and connections:

- Control Area (Left):** A **Printer**, **Control PC**, and **Receiver** are connected to the **EUT LISN**.
- EUT LISN:** Connected to the **EUT** and the **Metal Ground Plane**.
- EUT:** The Equipment Under Test, positioned on a table at a height of $\geq 80\text{cm}$ from the **Metal Ground Plane**. It is connected to the **AE** and the **EUT LISN**.
- AE (Antenna):** Connected to the **EUT** and the **AE LISN**.
- AE LISN:** Connected to the **AE** and the **Metal Ground Plane**. It includes a **50Ω** termination.
- Metal Ground Plane:** A horizontal plane at the base of the setup, connected to the **EUT LISN** and **AE LISN**.
- Shielded Room:** The entire setup is enclosed in a **Shielded Room**, with a distance of $\geq 80\text{cm}$ between the **EUT** and the top of the room.
- Termination:** The **AE LISN** is terminated with a **50Ω** resistor.
- Connections:** The **Receiver** is connected to the **EUT LISN**. The **EUT** is connected to the **AE**. The **AE** is connected to the **AE LISN**. The **EUT LISN** and **AE LISN** are both connected to the **Metal Ground Plane**.

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.


Power to the EUT was provided through the LISN which has the Impedance (50 Ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISN was filtered to eliminate ambient signal interference and this filter was bonded to ground. Peripheral equipment to provide a functional system (support equipment) for EUT testing was powered through a ganged, metal power outlet box bonded to the ground. AC input power for the auxiliary power outlets was obtained from the same filtered source that provides input power to the LISN.

3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 150KHz--30MHz
 Detector Function: Quasi-Peak / Average Mode
 Resolution Bandwidth: 9KHz

3.2 Test Data: LAN--10M: Configuration 1

Table 3.2.1 Telecommunication Port Conducted Emission

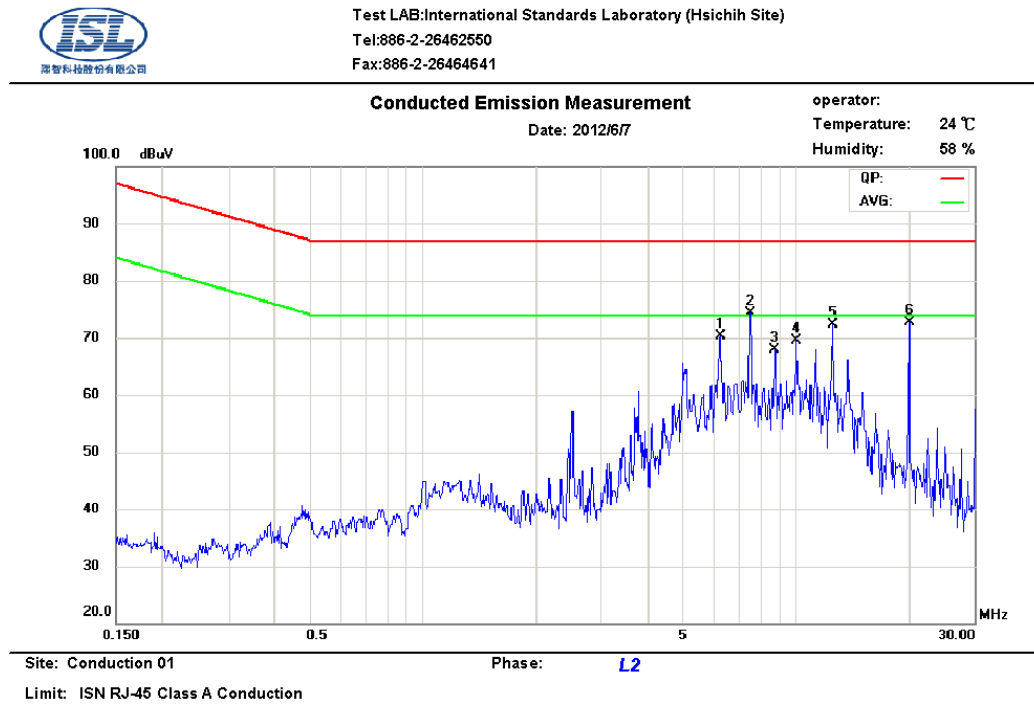

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	6.2500	9.97	0.18	62.11	87.00	-24.89	48.60	74.00	-25.40	
2	7.5000	9.98	0.20	66.63	87.00	-20.37	53.46	74.00	-20.54	
3	8.7500	9.98	0.21	60.75	87.00	-26.25	48.65	74.00	-25.35	
4	10.0000	9.98	0.22	58.28	87.00	-28.72	44.23	74.00	-29.77	
5	12.5000	9.98	0.23	63.74	87.00	-23.26	51.74	74.00	-22.26	
6	20.0000	9.98	0.28	63.57	87.00	-23.43	47.37	74.00	-26.63	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.3 Test Data: LAN--100M: Configuration 1

Table 3.3.1 Telecommunication Port Conducted Emission

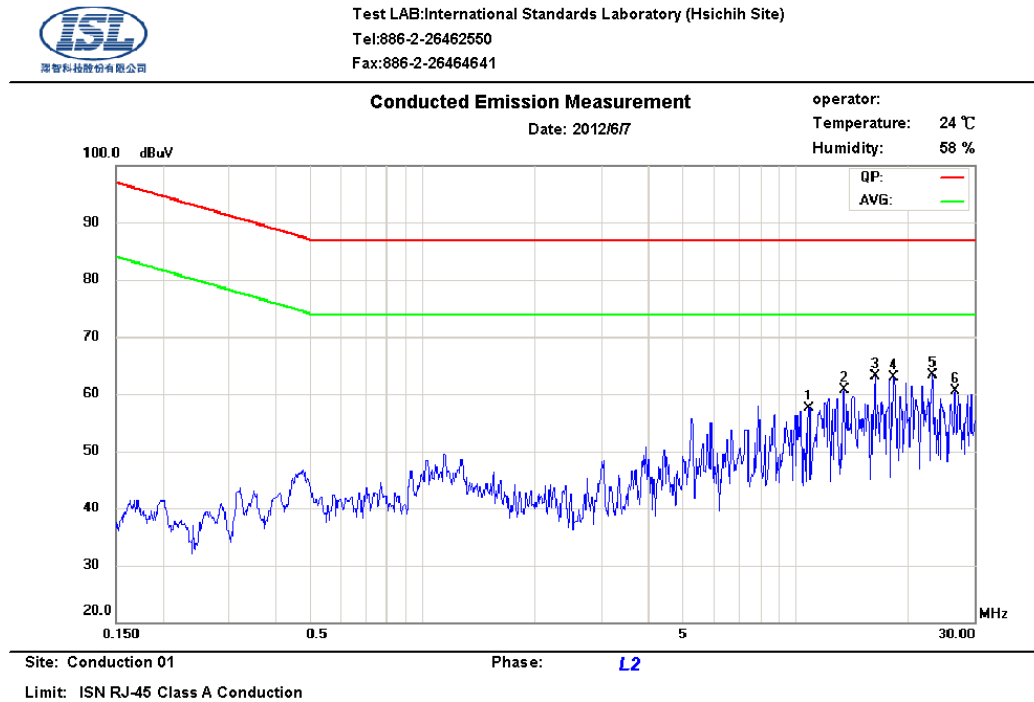

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	10.8000	9.98	0.22	42.92	87.00	-44.08	40.20	74.00	-33.80	
2	13.4250	9.98	0.23	48.91	87.00	-38.09	46.54	74.00	-27.46	
3	16.2250	9.98	0.25	60.03	87.00	-26.97	58.12	74.00	-15.88	
4	18.2500	9.98	0.27	47.96	87.00	-39.04	46.01	74.00	-27.99	
5	23.1250	9.99	0.30	59.87	87.00	-27.13	57.95	74.00	-16.05	
6	26.6250	10.01	0.32	30.62	87.00	-56.38	21.29	74.00	-52.71	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.4 Test Data: LAN--GIGA: Configuration 1

Table 3.4.1 Telecommunication Port Conducted Emission

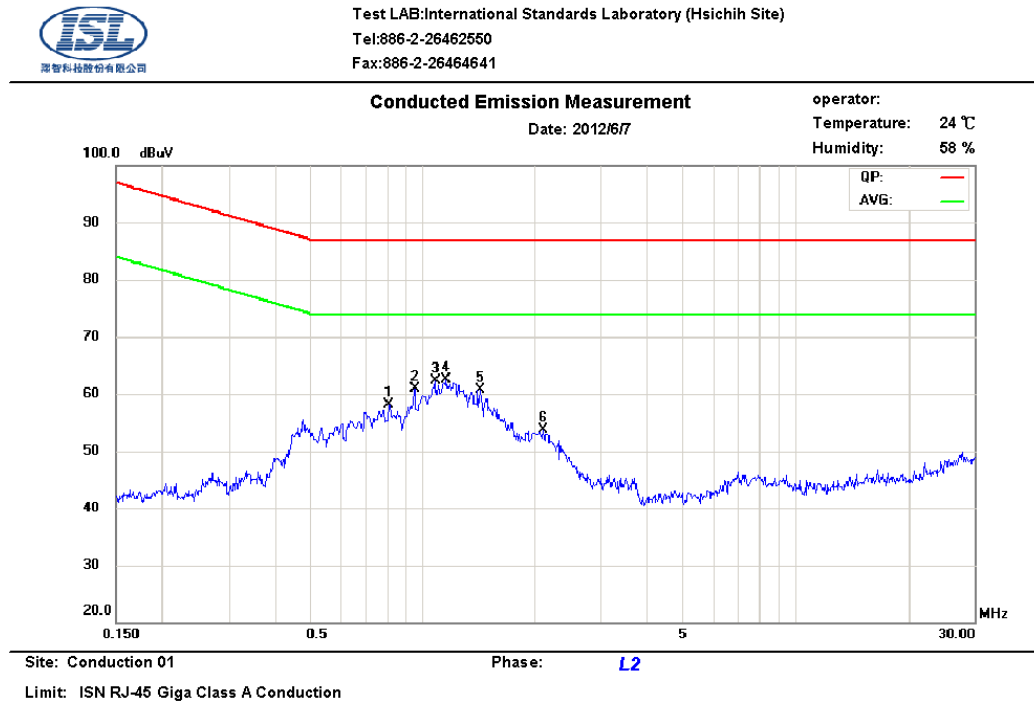

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.8105	10.03	0.06	47.31	87.00	-39.69	35.65	74.00	-38.35	
2	0.9455	10.01	0.07	49.55	87.00	-37.45	38.13	74.00	-35.87	
3	1.0760	10.01	0.07	54.27	87.00	-32.73	43.70	74.00	-30.30	
4	1.1525	10.01	0.08	55.12	87.00	-31.88	42.90	74.00	-31.10	
5	1.4225	10.02	0.09	52.16	87.00	-34.84	40.74	74.00	-33.26	
6	2.0930	10.03	0.11	45.52	87.00	-41.48	36.62	74.00	-37.38	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.5 Test Data: LAN--10M: Configuration 2

Table 3.5.1 Telecommunication Port Conducted Emission

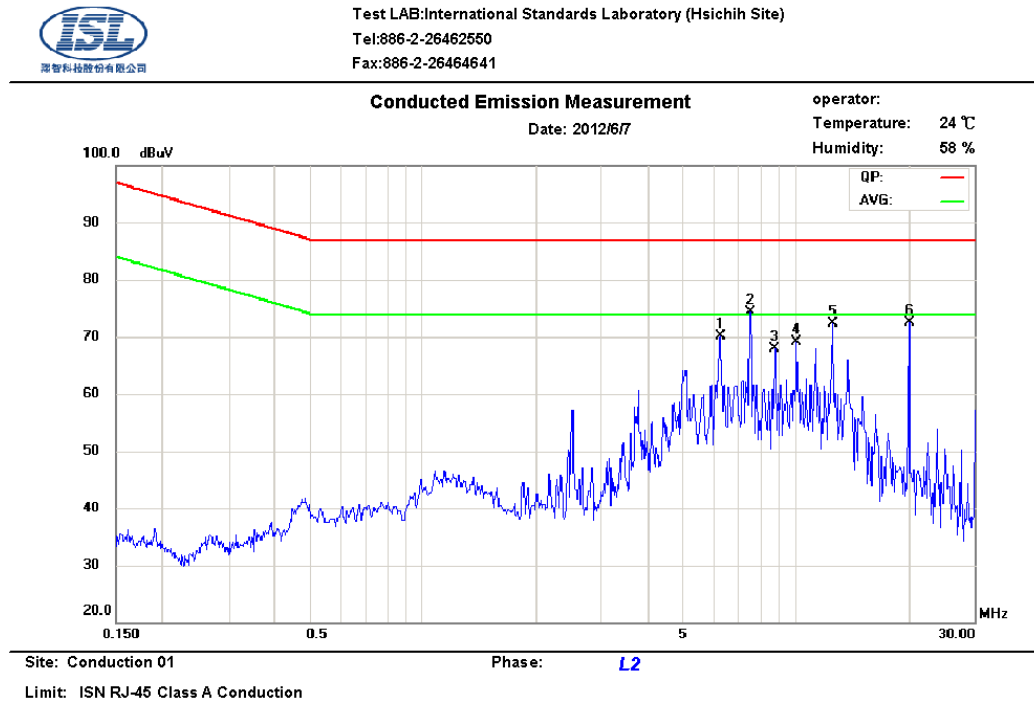

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	6.2500	9.97	0.18	62.15	87.00	-24.85	48.62	74.00	-25.38	
2	7.5000	9.98	0.20	66.65	87.00	-20.35	53.47	74.00	-20.53	
3	8.7500	9.98	0.21	60.75	87.00	-26.25	48.67	74.00	-25.33	
4	10.0000	9.98	0.22	58.38	87.00	-28.62	44.27	74.00	-29.73	
5	12.5000	9.98	0.23	63.75	87.00	-23.25	51.76	74.00	-22.24	
6	20.0000	9.98	0.28	63.51	87.00	-23.49	47.43	74.00	-26.57	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.6 Test Data: LAN--100M: Configuration 2

Table 3.6.1 Telecommunication Port Conducted Emission

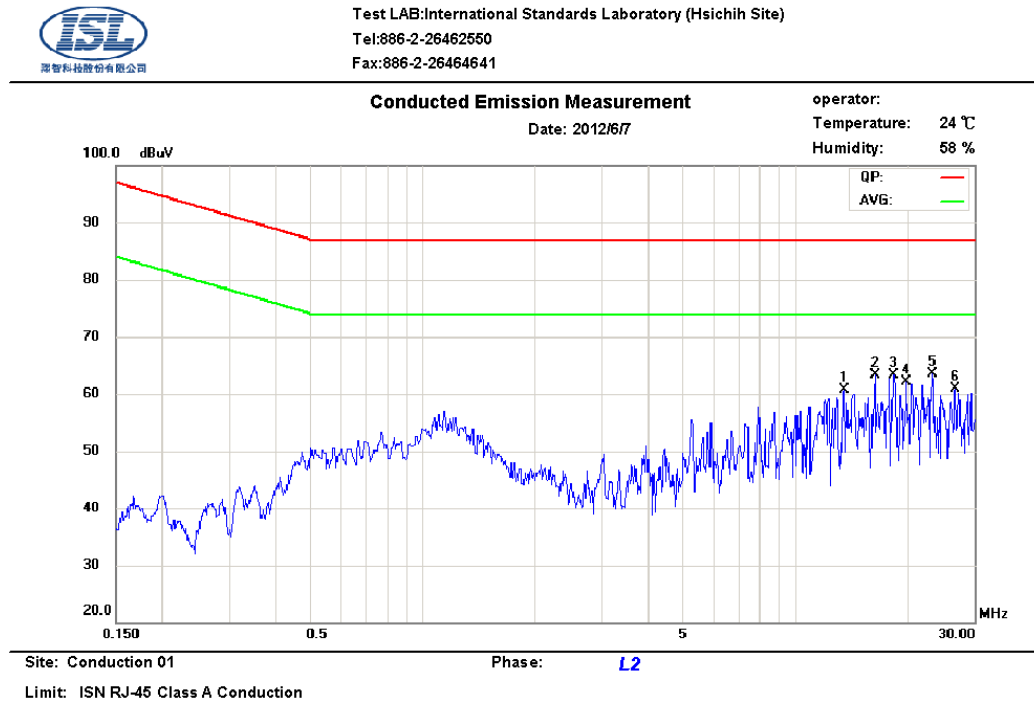

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	13.4250	9.98	0.23	48.90	87.00	-38.10	46.53	74.00	-27.47	
2	16.2250	9.98	0.25	60.06	87.00	-26.94	58.13	74.00	-15.87	
3	18.2500	9.98	0.27	47.97	87.00	-39.03	46.00	74.00	-28.00	
4	19.7000	9.98	0.28	40.15	87.00	-46.85	38.46	74.00	-35.54	
5	23.1250	9.99	0.30	59.89	87.00	-27.11	57.99	74.00	-16.01	
6	26.6250	10.01	0.32	30.94	87.00	-56.06	21.23	74.00	-52.77	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.7 Test Data: LAN--GIGA: Configuration 2

Table 3.7.1 Telecommunication Port Conducted Emission

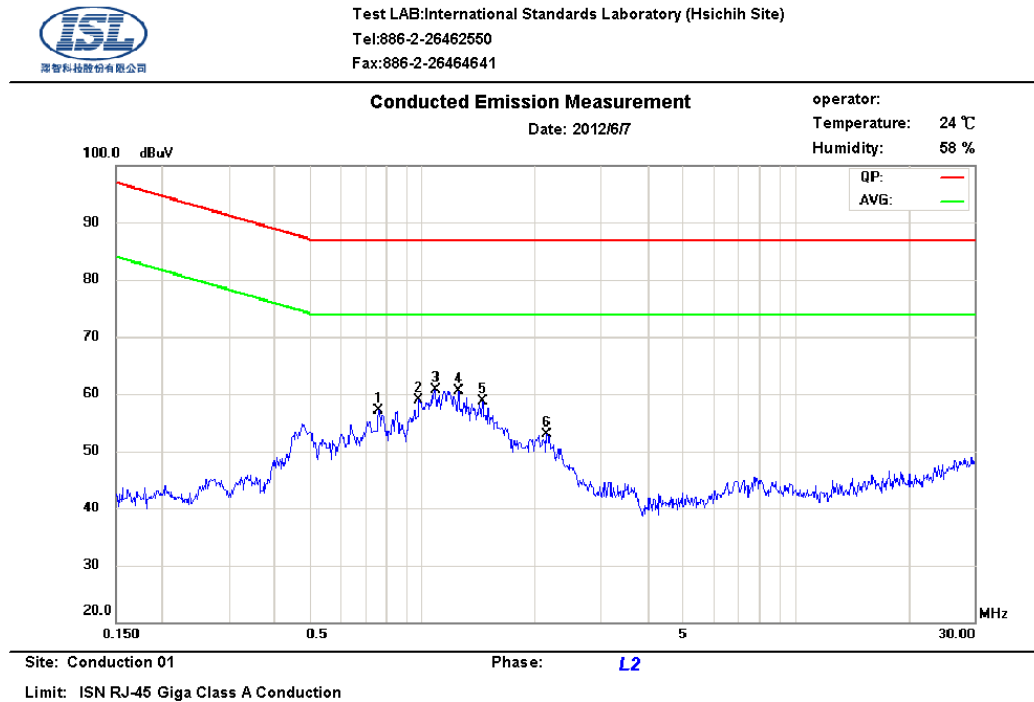

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct dBuV	QP Limit dBuV	QP Margin dB	AVG Correct dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.7610	10.03	0.05	49.25	87.00	-37.75	37.88	74.00	-36.12	
2	0.9770	10.01	0.07	49.68	87.00	-37.32	38.92	74.00	-35.08	
3	1.0715	10.01	0.07	52.64	87.00	-34.36	43.28	74.00	-30.72	
4	1.2424	10.01	0.08	51.49	87.00	-35.51	39.95	74.00	-34.05	
5	1.4450	10.02	0.09	48.39	87.00	-38.61	38.33	74.00	-35.67	
6	2.1470	10.03	0.11	46.76	87.00	-40.24	41.57	74.00	-32.43	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

4. Radiated Disturbance Emissions

4.1 Test Setup and Procedure

4.1.1 Test Setup

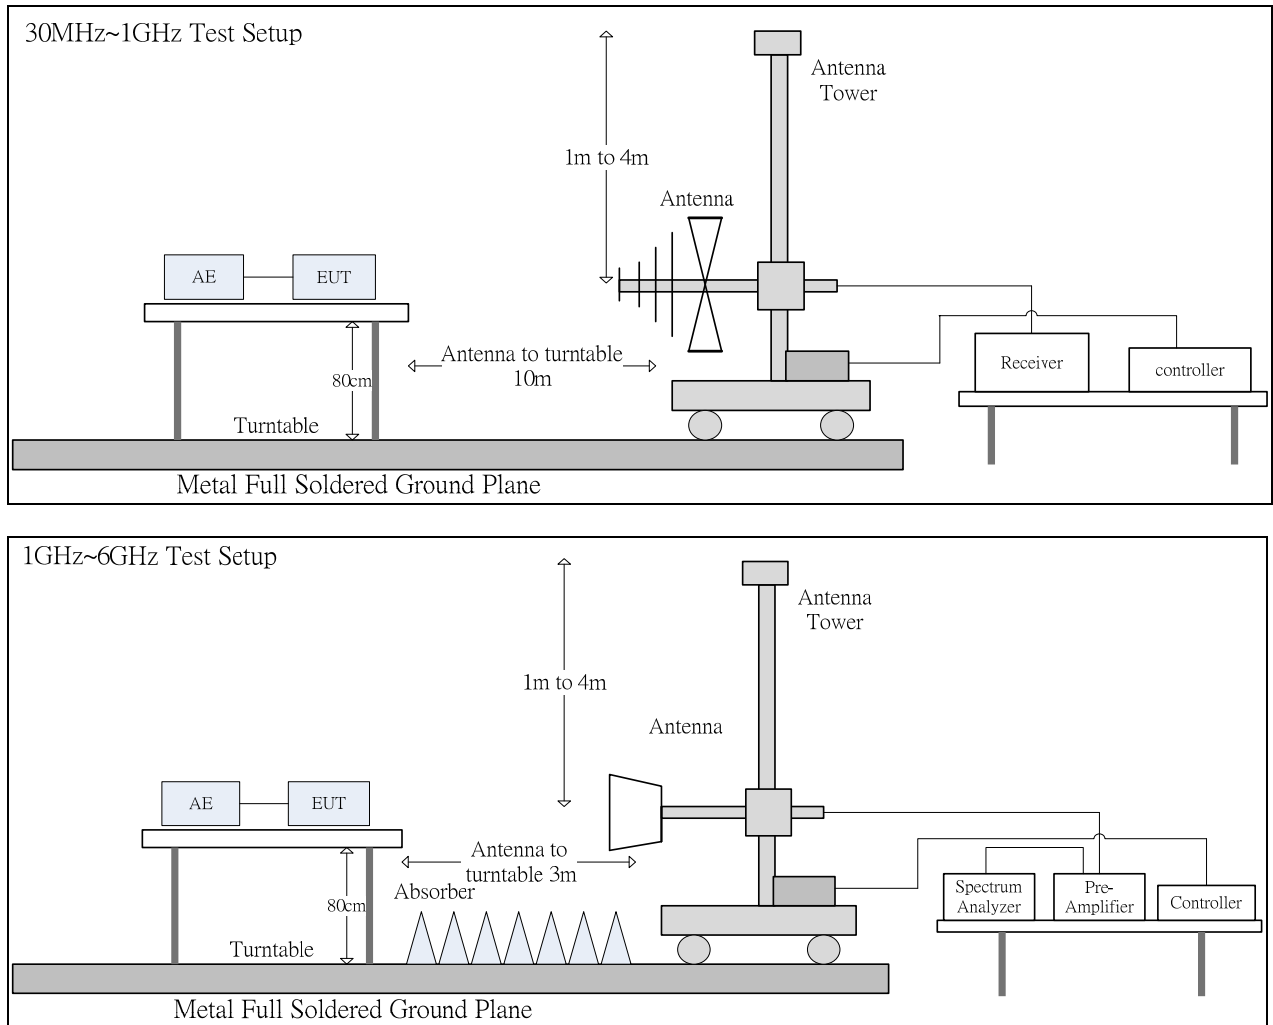

4.1.2 Test Procedure

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter open field sites or 10 meter chamber. Desktop EUT are set up on a wooden stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating

the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	30MHz--1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120KHz


Frequency Range:	Above 1 GHz to 6 GHz
Detector Function:	Peak/Average Mode
Resolution Bandwidth:	1MHz

4.2 Radiation Test Data: Configuration 1

Table 4.2.1 Radiated Emissions (Horizontal)



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

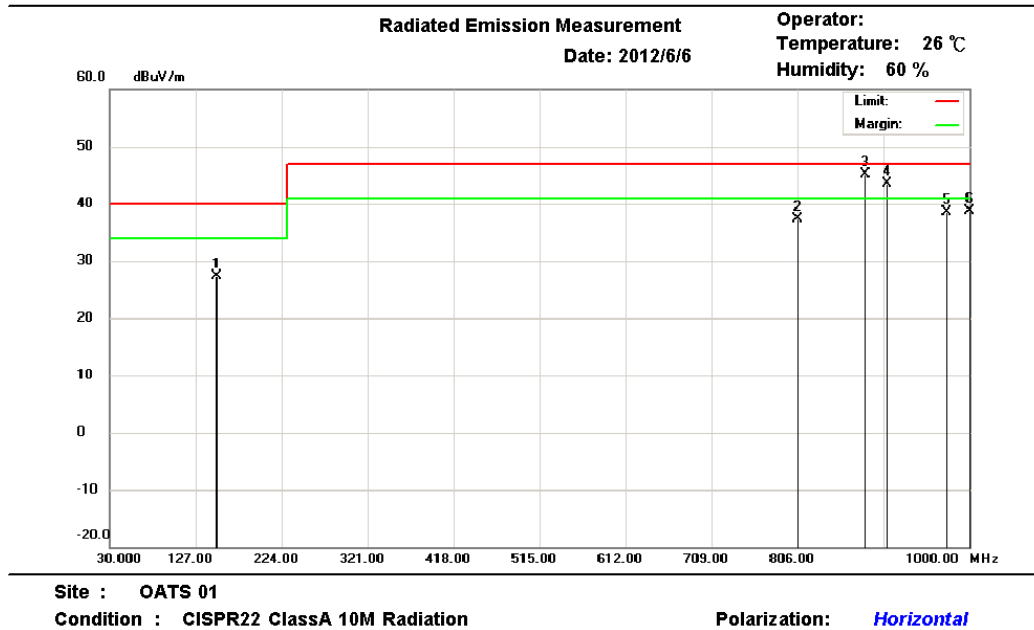

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	150.5400	13.58	12.57	1.22	0.00	27.37	40.00	-12.63	233	115	QP
2	806.3980	12.95	21.38	2.99	0.00	37.32	47.00	-9.68	100	82	QP
3	881.9720	19.76	22.16	3.12	0.00	45.04	47.00	-1.96	129	34	QP
4	907.1800	18.03	22.37	3.16	0.00	43.56	47.00	-3.44	113	201	QP
5	974.0900	12.19	23.04	3.3	0.00	38.53	47.00	-8.47	248	109	QP
6	999.9500	12.08	23.3	3.36	0.00	38.74	47.00	-8.26	242	294	QP

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.




Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

Radiated Emission Measurement

Date: 2012/6/12
Time: AM 09:12:00

Operator:
Temperature: 25 °C
Humidity: 55 %

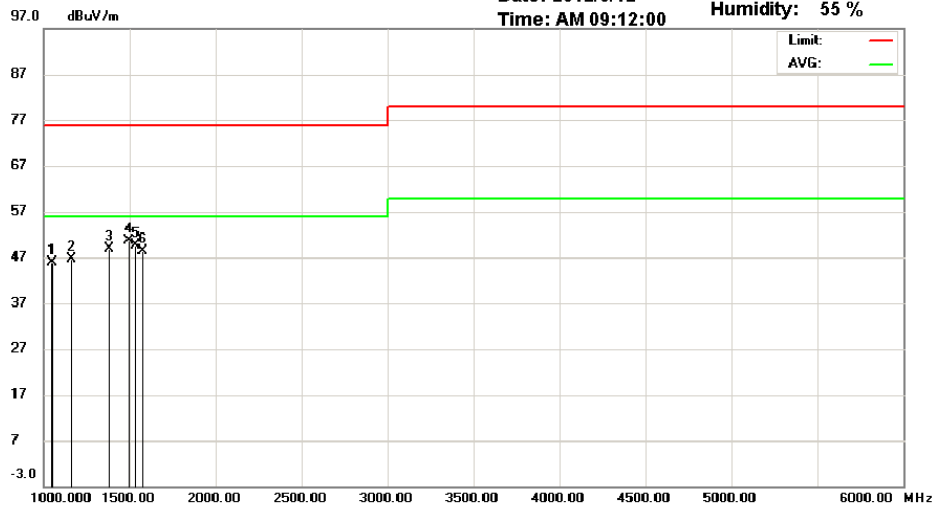

Site : Chamber 01

Condition : CISPR22 ClassA 3M Radiation

Polarization: *Horizontal*

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1048.077	66.62	28.3	3	51.95	45.97	76.00	-30.03	152	45	peak
2	1152.244	67.16	28.3	3.14	51.97	46.63	76.00	-29.37	100	10	peak
3	1384.615	69.17	28.3	3.46	52.02	48.91	76.00	-27.09	174	150	peak
4	1496.795	70.87	28.3	3.62	52.05	50.74	76.00	-25.26	146	120	peak
5	1536.859	69.46	28.51	3.66	52.06	49.57	76.00	-26.43	136	119	peak
6	1576.923	67.97	28.73	3.71	52.06	48.35	76.00	-27.65	124	100	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


Horn Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 4.2.2 Radiated Emissions (Vertical)



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

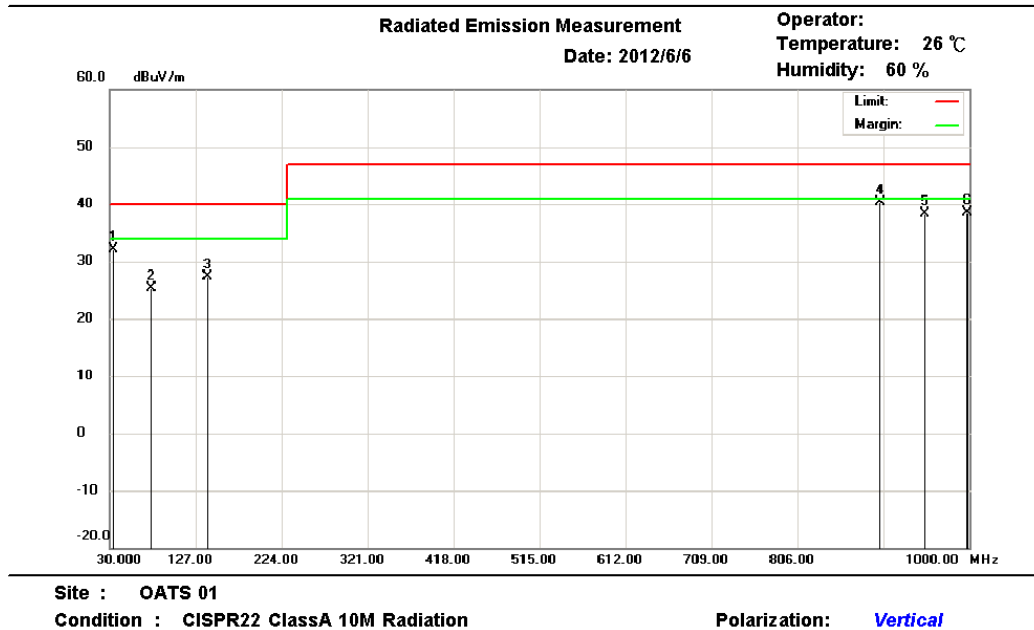

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	34.0400	13.21	18.19	0.61	0.00	32.01	40.00	-7.99	100	233	QP
2	75.5944	16.54	7.86	0.87	0.00	25.27	40.00	-14.73	136	17	QP
3	139.9980	12.79	13.3	1.17	0.00	27.26	40.00	-12.74	292	302	QP
4	900.0180	14.90	22.3	3.15	0.00	40.35	47.00	-6.65	320	322	QP
5	950.1200	12.18	22.8	3.24	0.00	38.22	47.00	-8.78	241	136	QP
6	997.9300	11.84	23.28	3.36	0.00	38.48	47.00	-8.52	337	219	QP

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.




Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

Radiated Emission Measurement

Date: 2012/6/12
Time: AM 09:54:46

Operator:
Temperature: 25 °C
Humidity: 55 %

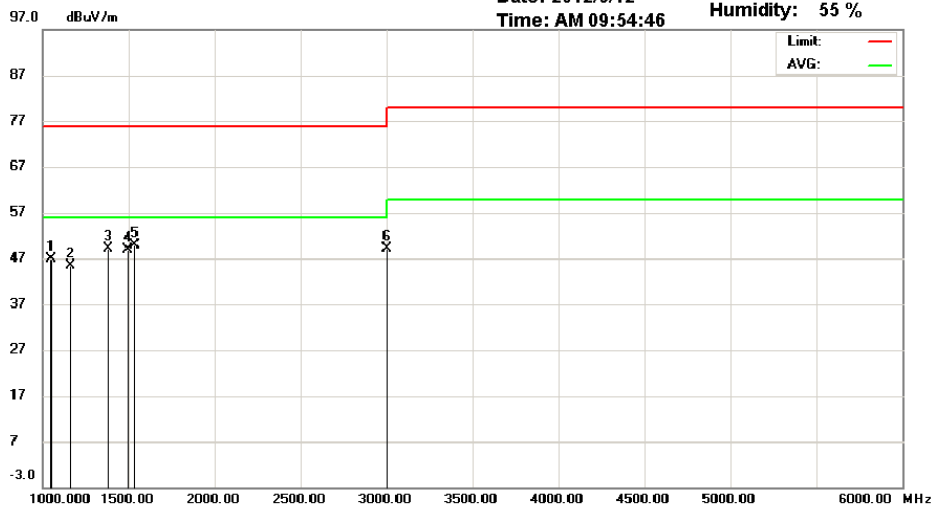

Site : Chamber 01

Condition : CISPR22 ClassA 3M Radiation

Polarization: **Vertical**

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1048.077	67.59	28.3	3	51.95	46.94	76.00	-29.06	188	119	peak
2	1152.244	65.82	28.3	3.14	51.97	45.29	76.00	-30.71	100	92	peak
3	1384.615	69.27	28.3	3.46	52.02	49.01	76.00	-26.99	100	120	peak
4	1496.795	69.00	28.3	3.62	52.05	48.87	76.00	-27.13	103	91	peak
5	1536.859	69.67	28.51	3.66	52.06	49.78	76.00	-26.22	176	144	peak
6	3003.205	63.35	32.6	5.23	52.16	49.02	80.00	-30.98	100	85	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Horn Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

5. Electrostatic discharge (ESD) immunity

5.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2/ IEC EN61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S7
Temperature:	24 °C
Humidity:	57%

Selected Test Point

Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.


Contact: Total 200 discharges minimum were to the selected contact points.

Indirect Contact Points: 25 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

5.2 Test Setup


EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470KΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

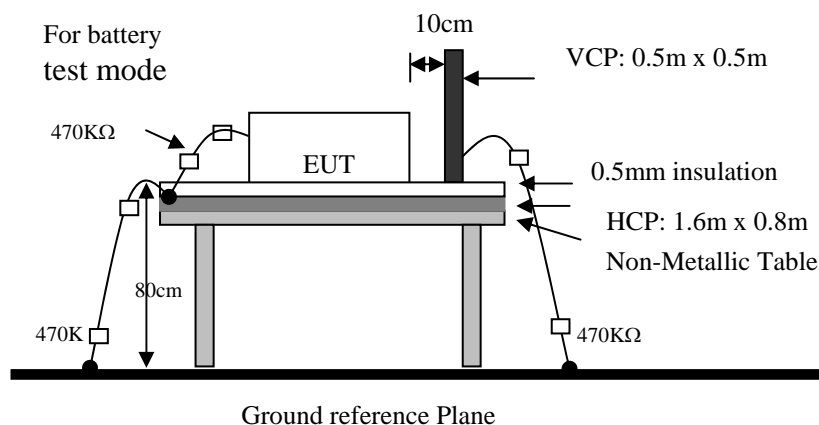

5.3 Test Result

Performance of EUT complies with the given specification.

Test Point:

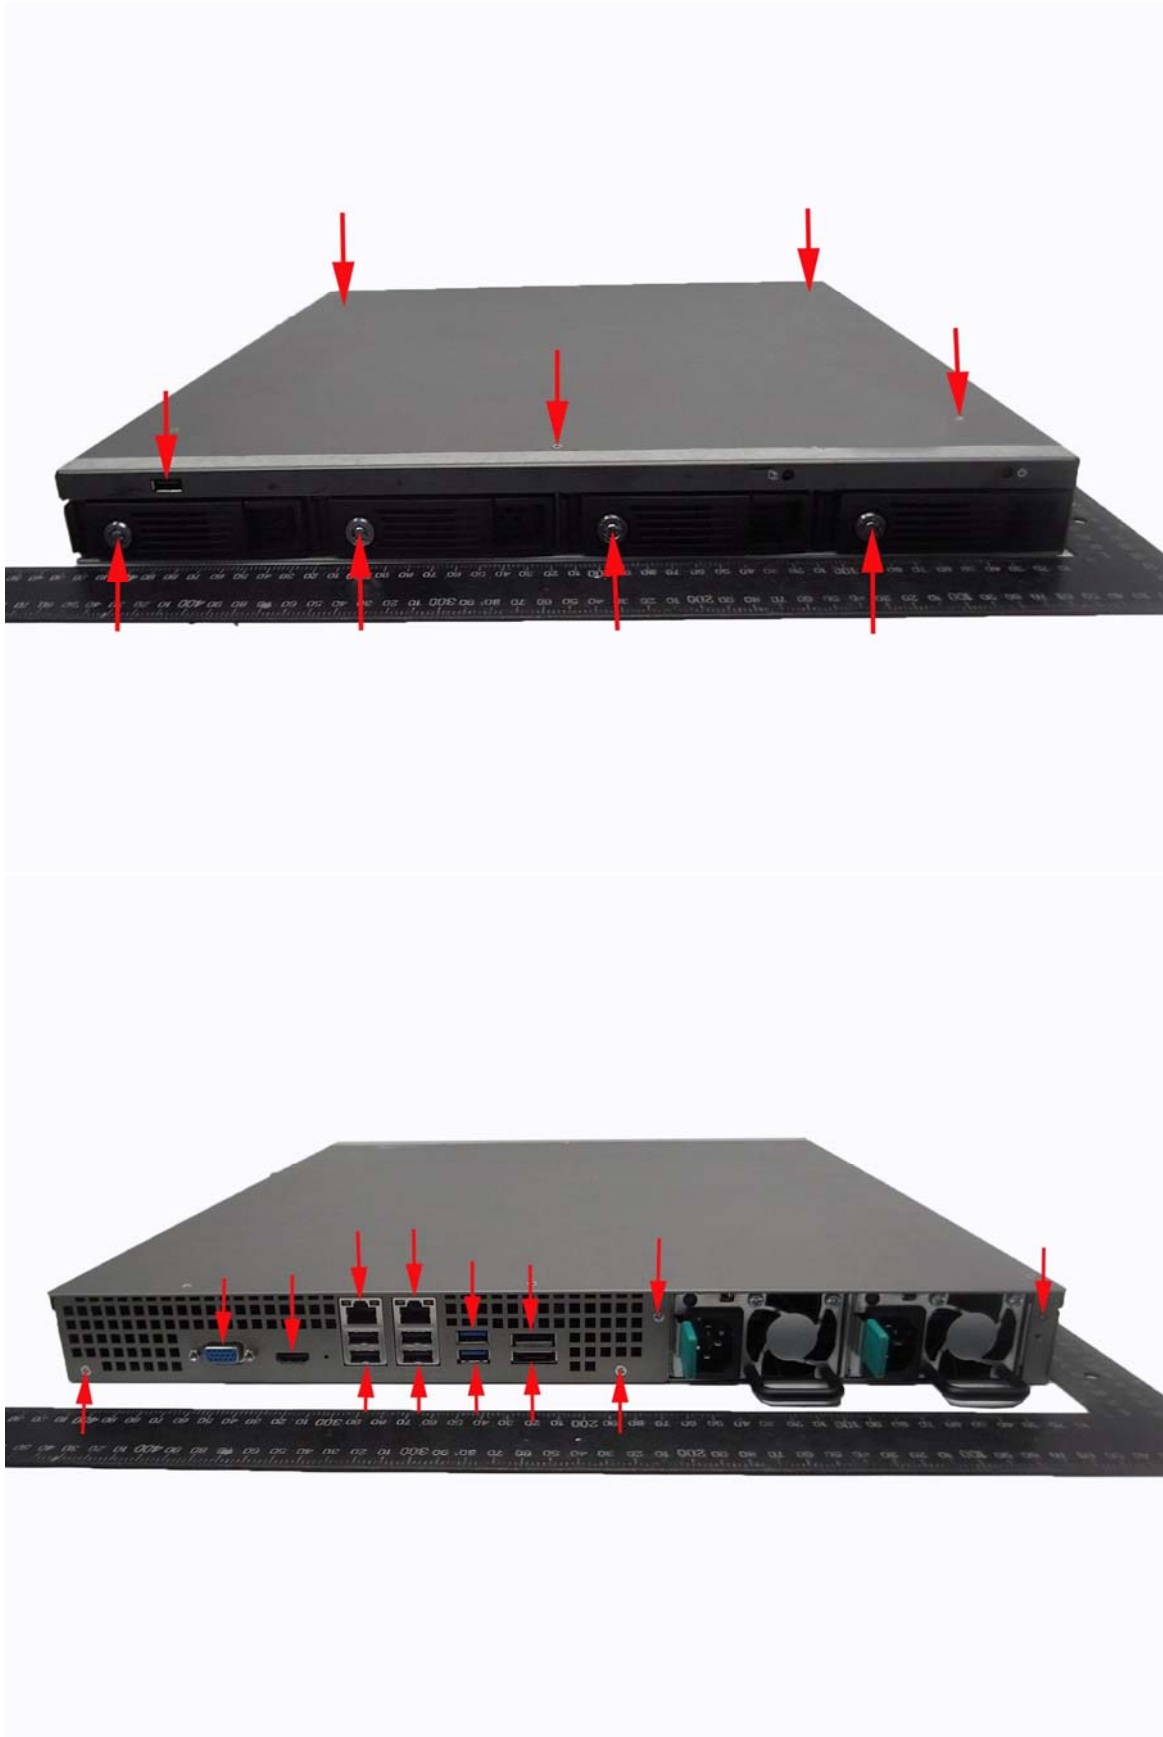

6. Radio-Frequency, Electromagnetic Field immunity


6.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3/ IEC EN61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1KHz 80%
Frequency range:	80 MHz~1 GHz
Frequency Step:	1% of last step frequency
Dwell time:	3s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	☒0° ☒90° ☒180° ☒270°
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S8
Temperature:	24°C
Humidity:	62%

6.2 Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

Full Anechoic Chamber

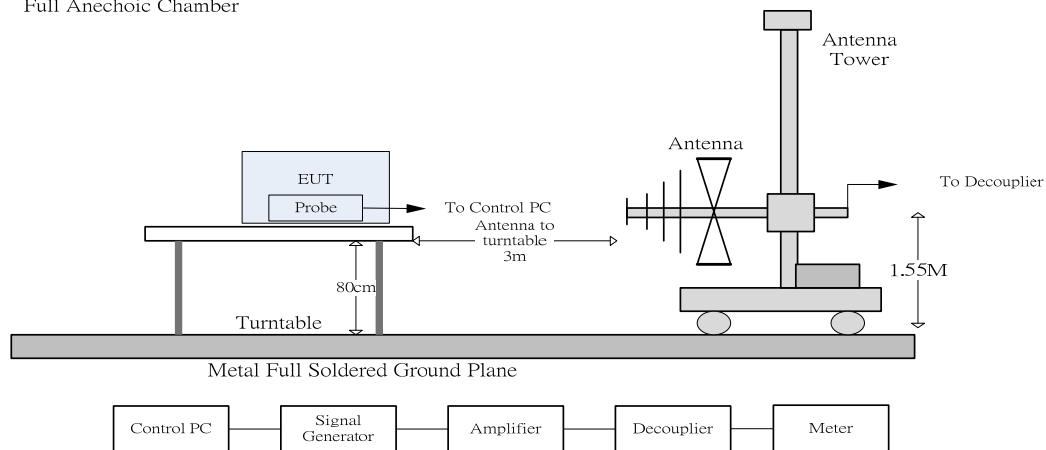

6.3 Test Result

Performance of EUT complies with the given specification.

7. Electrical Fast transients/burst immunity

7.1 Test Specification

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN 61000-4-4/ IEC EN61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV Twisted Pair LAN Port (I/O Cables): +/- 0.5 kV
Rise Time:	5ns
Hold Time:	50ns
Repetition Frequency:	5KHz
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S9
Temperature:	25 °C
Humidity:	60%

Test Procedure



The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec
Capacitive coupling clamp	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

7.2 Test Setup

EUT is at least 50cm from the conductive structure.

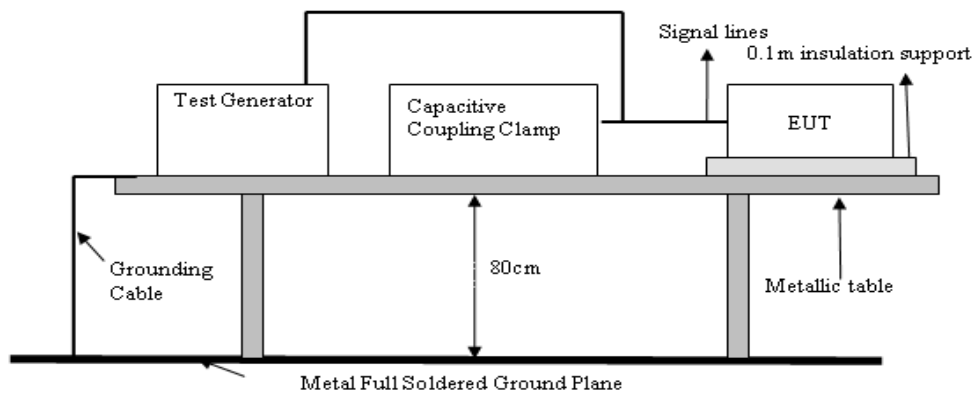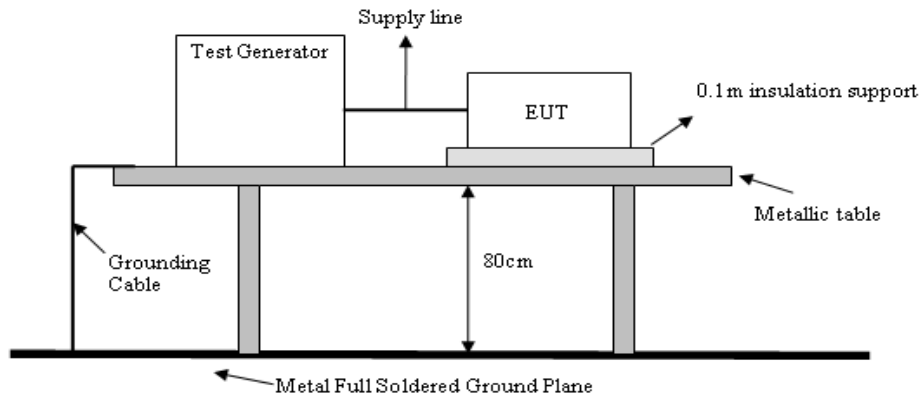

7.3 Test Result


Performance of EUT complies with the given specification.

8. Surge Immunity

8.1 Test Specification

Port:	AC mains	Signal and telecommunication port-Twisted Pair LAN Port
Basic Standard:	EN 61000-4-5/ IEC EN61000-4-5 (details referred to Sec 1.2)	
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV	Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 4 kV
Rise Time:	1.2us	10us
Hold Time:	50us	700us
Repetition Rate:	30 second	60 second
Angle:	☒0° ☒90° ☒180° ☒270°	NA
Criteria:	B	C
Remarks:		Where the coupling network for the 10/700 us waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) us waveform and appropriate coupling network.
Test Procedure:	refer to ISL QA -T4-E-S10	
Temperature:	25°C	
Humidity:	60%	

8.2 Test Setup

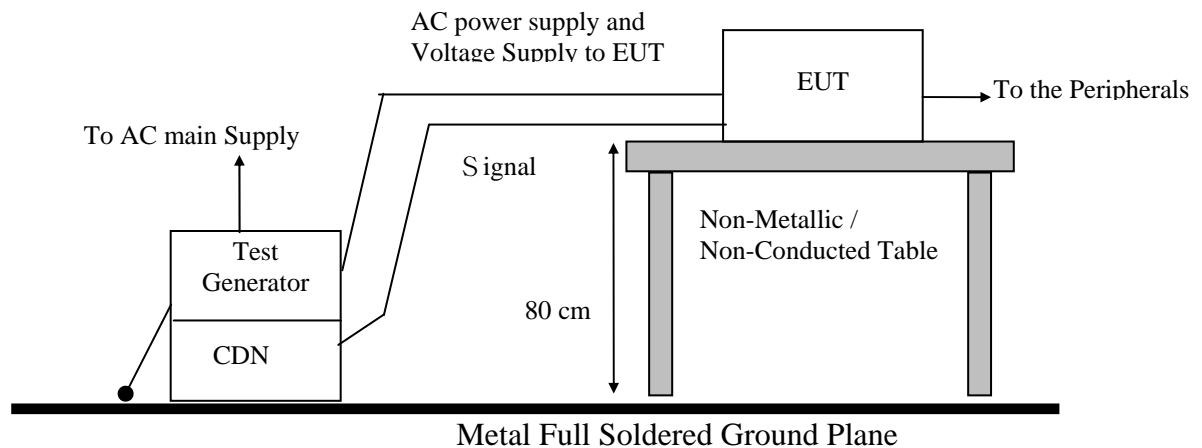

8.3 Test Result


Performance of EUT complies with the given specification.

9. Immunity to Conductive Disturbance

9.1 Test Specification

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN 61000-4-6/ IEC EN61000-4-6 (details referred to Sec 1.2)
Test Level:	3 V
Modulation:	AM 1KHz 80%
Frequency range:	0.15 MHz - 80MHz
Frequency Step:	1% of last Frequency
Dwell time:	3s
Criteria:	A
CDN Type:	CDN M2+M3, CDN T2, CDN T4, CDN T8, EM Clamp
Test Procedure	refer to ISL QA -T4-E-S11
Temperature:	24°C
Humidity:	57%

9.2 Test Setup

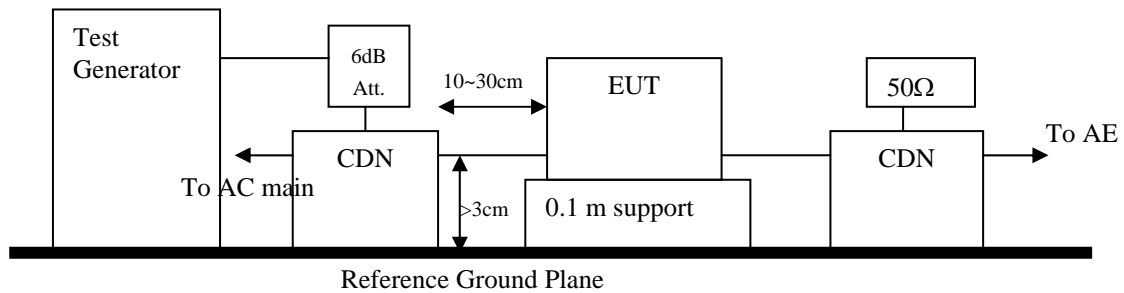

9.3 Test Result


Performance of EUT complies with the given specification.

10. Power Frequency Magnetic Field immunity

10.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8/ IEC EN61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S12
Temperature:	25°C
Humidity:	60%

10.2 Test Setup

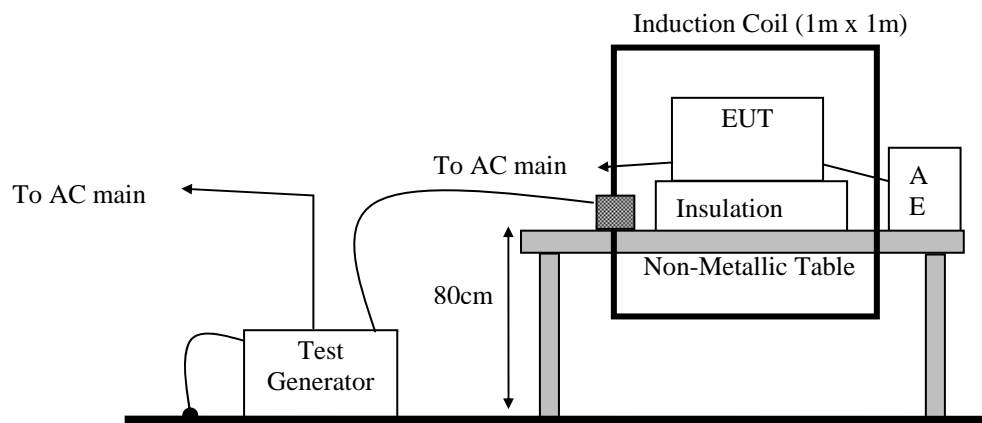

10.3 Test Result


Performance of EUT complies with the given specification.

11. Voltage Dips, Short Interruption and Voltage Variation immunity

11.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11/ IEC EN61000-4-11 (details referred to Sec 1.2)
Test Level: Criteria:	>95% in 0.5 period B
Test Level: Criteria:	30% in 25 period C
Test Level: Criteria:	>95% in 250 period C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure	refer to ISL QA -T4-E-S13
Temperature:	25°C
Humidity:	60%

11.2 Test Setup

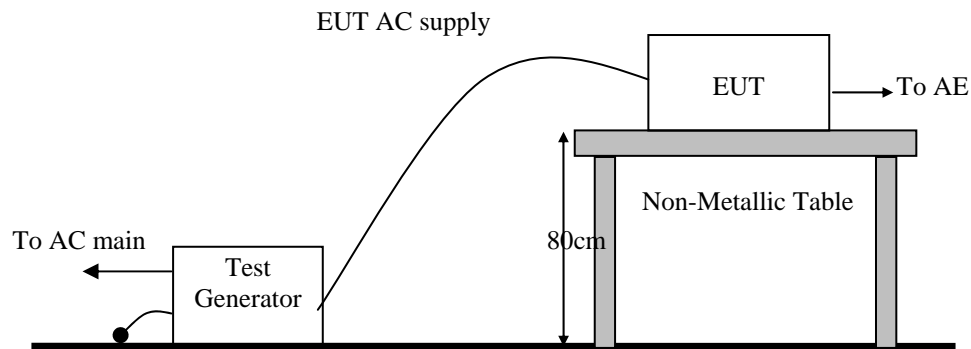

11.3 Test Result

Performance of EUT complies with the given specification.

12. Harmonics

12.1 Test Specification


Port:	AC mains
Active Input Power:	<75W
Basic Standard:	EN61000-3-2/IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	D
Test Procedure	refer to ISL QA -T4-E-S14
Temperature:	24°C
Humidity:	63%

Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

12.2 Test Setup

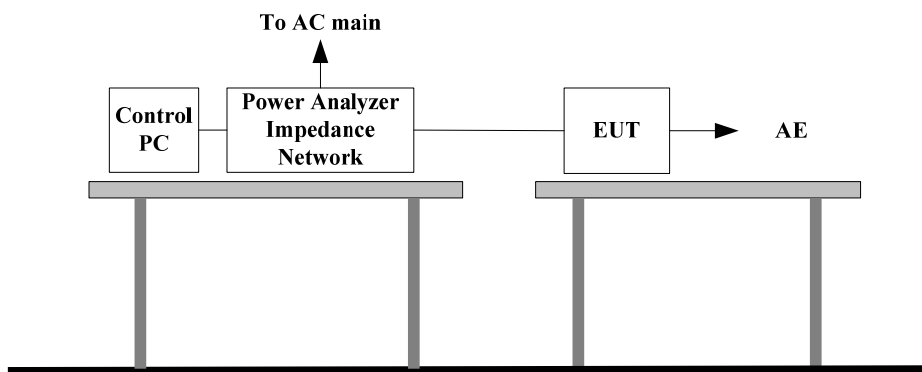

12.3 Test Result

Active input power under 75W, no limit apply, declare compliance

13. Voltage Fluctuations


13.1 Test Specification

Port:	AC mains
Basic Standard:	EN61000-3-3/IEC61000-3-3 (details referred to Sec 1.2)
Test Procedure	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min
	For Plt 2 hours
Temperature:	24°C
Humidity:	63%

Test Procedure


The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

13.2 Test Setup

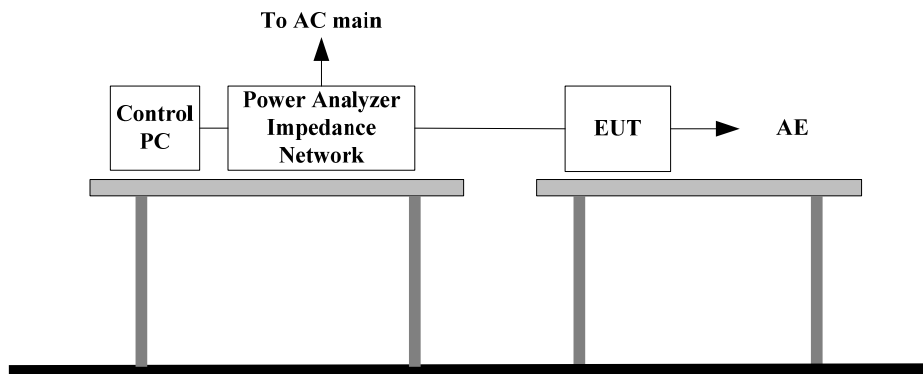

13.3 Test Result


Performance of EUT complies with the given specification.

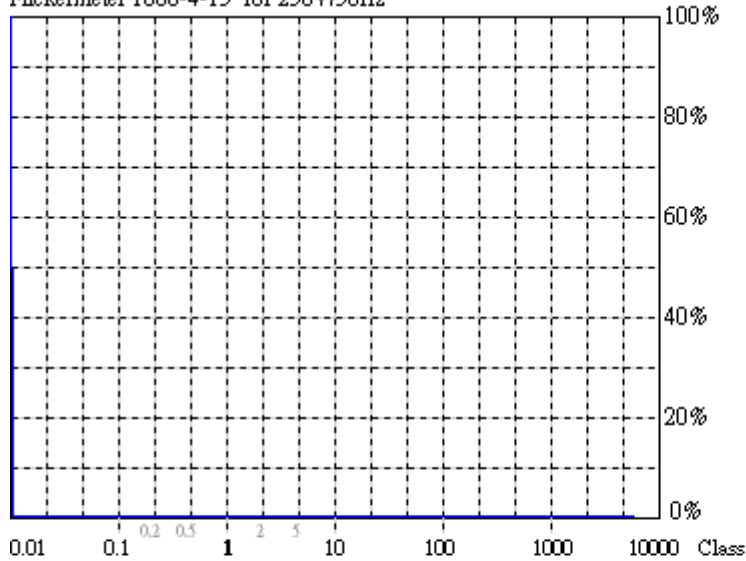Test Data:
 10Min
 Flickermeter 1000-4-15 for 230V/50Hz
**Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)**
 U_{rms} = 229.7 V P = 60.28 W
 I_{rms} = 0.438 A pf = 0.598

2012/6/12 PM 02:59:1

 Range: 2 A
 V_{nom}: 230 V
 TestTime: 10 min (100%)
Test completed, Result: PASSED

HAR-1000 EMC-Retester

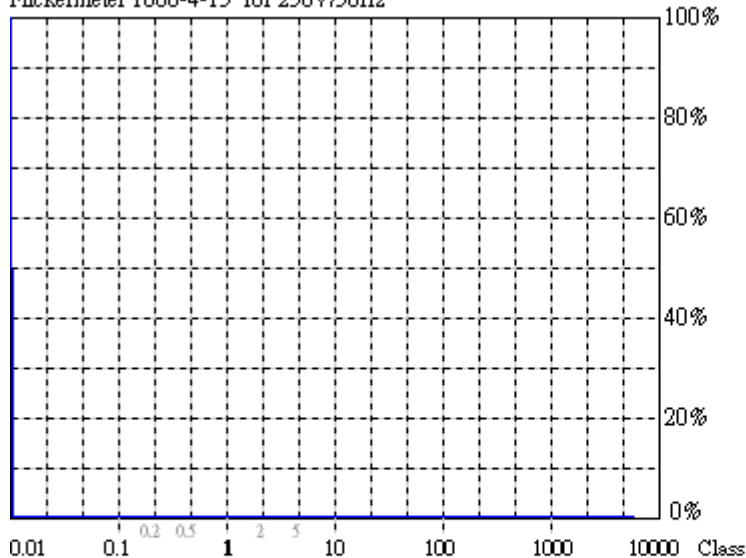 120Min
 Flickermeter 1000-4-15 for 230V/50Hz
**Flicker Emission - IEC 61000-3-3, EN 61000-3-3, (EN60555-3)**
 U_{rms} = 229.9 V P = 64.25 W
 I_{rms} = 0.452 A pf = 0.618

2012/6/12 PM 05:05:3

 Range: 2 A
 V_{nom}: 230 V
 TestTime: 120 min (10000%)
Test completed, Result: PASSED

HAR-1000 EMC-Retester

14. Appendix

14.1 Appendix A: Test Equipment

14.1.1 Test Equipment List

Location CON01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C1	EMEC	5D Cable	1F-C1	10/25/2011	10/25/2012
Conduction	LISN 02	EMCO	3825/2	1407	07/28/2011	07/28/2012
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/010	07/28/2011	07/28/2012
Conduction	ISN T2 03	FCC	FCC-TLISN-T 2-02	20618	07/28/2011	07/28/2012
Conduction	ISN T4 05	FCC	FCC-TLISN-T 4-02	20619	07/28/2011	07/28/2012
Conduction	ISN T8 03	FCC	FCC-TLINS-T 8-02	20620	07/28/2011	07/28/2012
Conduction	EMI Receiver 15	ROHDE & SCHWARZ	ESCI	101166	04/24/2012	04/24/2013

Location OATS01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation	BILOG Antenna 10	Sumol Sciences	JB1	A013004-1	07/18/2011	07/18/2012
Radiation	Coaxial Cable 3F-10M	EMCI	CFD400-NL	ISL-R001	03/16/2012	03/16/2013
Radiation	EMI Receiver 13	ROHDE & SCHWARZ	ESCI	101015	02/22/2012	02/22/2013

Location Chamber 01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. above 1Ghz	Horn Antenna 01	EMCO	3115	9504-4462	11/23/2011	11/23/2012
Rad. above 1Ghz	Horn Antenna 03	COM-Power	AH-826	100A	03/15/2011	03/15/2013
Rad. above 1Ghz	Microwave Cable-06	HUBER SUHNER	SUCFLEX 106	60404/6	07/13/2011	07/13/2012
Rad. above 1Ghz	Preamplifier 17	EMCI	EMC 01630	980009	08/03/2011	08/03/2012
Rad. above 1Ghz	Preamplifier 20	EMCI	EMC051845	980084	10/26/2011	10/26/2012
Rad. above 1Ghz	Spectrum Analyzer 23	ROHDE & SCHWARZ	FSU43	101255	10/06/2011	10/06/2012

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-3-2/3	DC Burn-In Load 02	D-RAM	DBS-2100	2100-910027	N/A	N/A
EN61K-3-2/3	Harmonic/Flicker Test System 03	EMC Partner	HARMONICS-1000	178	03/23/2012	03/23/2013
EN61K-4-,4,5,8,11	TRANSIENT 2000 01	EMC Partner	TRANSIENT-2000	950	12/01/2011	12/01/2012
EN61K-4-2	ESD GUN 04	Schaffner	NSG 438	489	03/28/2012	03/28/2013
EN61K-4-3	BILOG Antenna 06	Schaffner	CBL6112B	2754	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~3.0GHz 60W	AR	60S1G3	312762	N/A	N/A
EN61K-4-3	Broadband coupler 10K~220Mhz	Amplifier Research	DC2500	19810	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180	20364	N/A	N/A
EN61K-4-3	Broadband Coupler 1~4GHz	Werlatone	C5291	6516	N/A	N/A
EN61K-4-3	Coaxial Cable Chmb 04-3M-2	Belden	RG-8/U	Chmb 04-3M-2	N/A	N/A
EN61K-4-3	Signal Generator 03	Anritsu	MG3642A	6200162550	06/10/2011	06/10/2012
EN61K-4-4	Digital Oscilloscope	Tektronix	TDS 684A	B010761	N/A	N/A
EN61K-4-4	EFT Clamp	Precision	1604242	CNEFT1000-103	N/A	N/A
EN61K-4-5	CDN-UTP8 01	EMC Partner	CDN-UTP8	032	12/01/2011	12/01/2012
EN61K-4-5	SURGE-TESTER 01	EMC Partner	MIG0603IN3	778	12/01/2011	12/01/2012
EN61K-4-6	6dB Attenuator	Weinschel Corp	33-6-34	BC5975	N/A	N/A
EN61K-4-6	Amplifier 4-6	Amplifier Research	150A100	1-1-R-02157	N/A	N/A
EN61K-4-6	Attenuator 6dB 4-6	BIRO	100-A-FFN-06	0123	N/A	N/A
EN61K-4-6	CDN M2+M3	Frankonia	M2+M3	A3011016	07/30/2011	07/30/2012
EN61K-4-6	CDN T2 01	Frankonia	T2	A3010003	07/30/2011	07/30/2012
EN61K-4-6	CDN T4 05	FCC Inc.	FCC-801-T4-RJ45	08020	08/26/2011	08/26/2012
EN61K-4-6	CDN T8 01	FCC Inc.	FCC-801-T8-RJ45	08021	08/26/2011	08/26/2012
EN61K-4-6	EM-Clamp 01	FCC	F-203I-23MM	539	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-1	Harbour Industries	M17/128-RG400	4-6 01-1	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-2	Harbour Industries	M17/128-RG400	4-6 01-2	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-3	Harbour Industries	M17/128-RG400	4-6 01-3	N/A	N/A
EN61K-4-6	KAL-AD RJ45S	BIRO			N/A	N/A
EN61K-4-6	KAL-AD T2	BIRO			N/A	N/A
EN61K-4-6	Passive Impedance Adaptor 4-6	FCC	FCC-801-150-50-CDN	9758;9759	N/A	N/A
EN61K-4-6, CISPR 13, Antenna	Signal Generator 02	HP	8648B	3642U01040	08/18/2011	08/18/2012
EN61K-4-8	Magnetic Field Antenna	Precision	TRAIZ44B	MF1000-23	N/A	N/A

PS: N/A => The equipment does not need calibration.

14.1.2 Software for Controlling Spectrum/Receiver and Calculating Test Data

Test Item	Filename	Version
EN61000-3-2	HARCS.EXE	4.16
EN61000-3-3	HARCS.EXE	4.16
EN61000-4-3	Tile.Exe	2.0.P
EN61000-4-6	EN61000-4-6 Application Software	1.13.e
EN61000-4-2	N/A	2.0
EN61000-4-4	Tema.EXE	1.69
EN61000-4-5	Tema.EXE	1.69
EN61000-4-8	N/A	
EN61000-4-11	VDS-2002Rs.EXE	2.00

Radiation/Conduction	Filename	Version	Issued Date
Hsichih Conduction	EZ EMC	1.1.4.2	2/10/2007
Hsichih Radiation	EZ EMC	1.1.4.2	1/24/2007

14.2 Appendix B: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2003. The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 01> $\pm 3.262\text{dB}$

<OATS 01 (10M)>

Horizontal

30MHz~200MHz: $\pm 4.216\text{ dB}$

200MHz~1GHz: $\pm 4.438\text{ dB}$

Vertical

30MHz~200MHz: $\pm 4.342\text{ dB}$

200MHz~1GHz: $\pm 4.426\text{ dB}$

<Chamber 01 (3M)>

1GHz~18GHz: $\pm 3.515\text{dB}$

18GHz~26.5GHz: $\pm 3.424\text{dB}$

<Immunity 01>

Test item	Uncertainty
EN61000-4-2 (ESD)	
Rise time t_r	$\leq 15\%$
Peak current I_p	$\leq 6.3\%$
current at 30 ns	$\leq 6.3\%$
current at 60 ns	$\leq 6.3\%$
EN61000-4-3 (RS)	$\pm 1.776\text{dB}$
EN61000-4-4 (EFT)	
Time	$\pm 1.427\%$
Voltage	$\pm 1.110 \%$
Current	
EN61000-4-5 (Surge)	
Time	$\pm 0.588 \%$
Voltage	$\pm 1.282 \%$
Current	$\pm 1.282 \%$
EN61000-4-6 (CS)	$\pm 1.892\text{dB}$
CDN	$\pm 1.36\text{dB}$
EM Clamp	$\pm 3.19\text{dB}$
EN61000-4-8 (Magnetic)	$\pm 1.728\%$
EN61000-4-11 (Dips)	
Time	$\pm 1.159\%$
Voltage	$\pm 0.100\%$
Current	$\pm 1.177\%$
EN61000-3-2 (Harmonics)	$\pm 1.879 \%$
EN61000-3-3 (Fluctuations and Flicker)	$\pm 1.879 \%$


14.3 Appendix C: Photographs of EUT Configuration Test Set Up

14.3.1 Photo of Main Power Port Conducted Emission and Telecommunication Port Conducted Emission Measurement

Front View



Back View

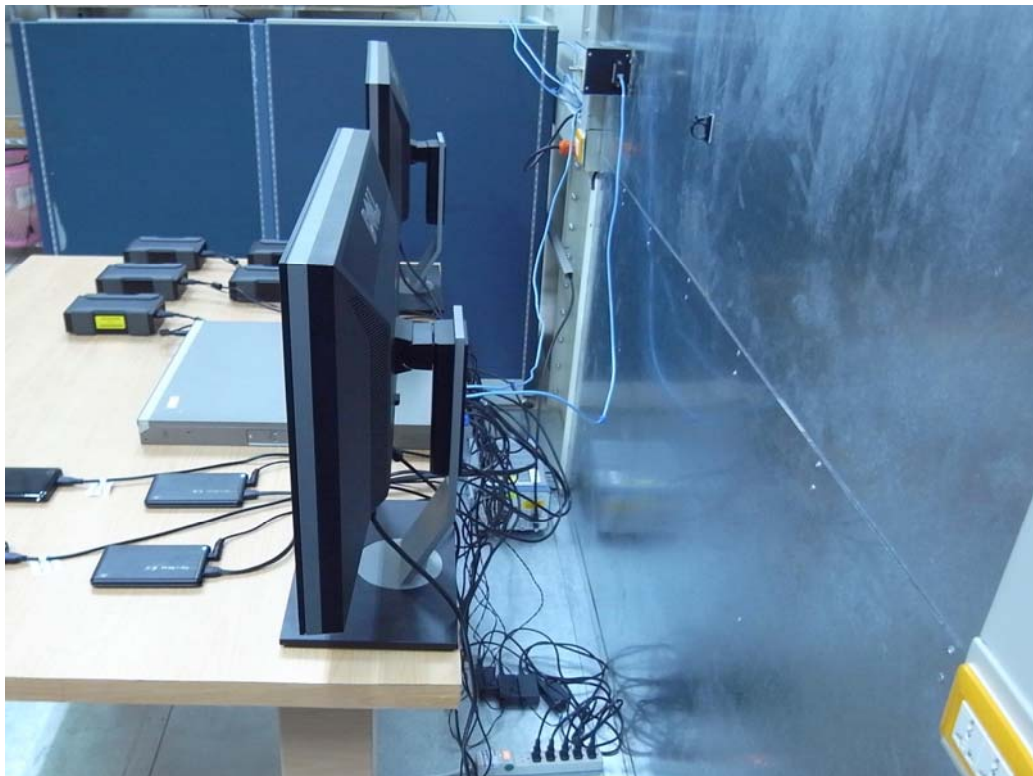

14.3.2 Photo of Radiated Emission Measurement

Front View (30MHz~1GHz)



Back View (30MHz~1GHz)




Front View (above 1GHz)



Back View (above 1GHz)




14.3.3 Photo of ESD Measurement

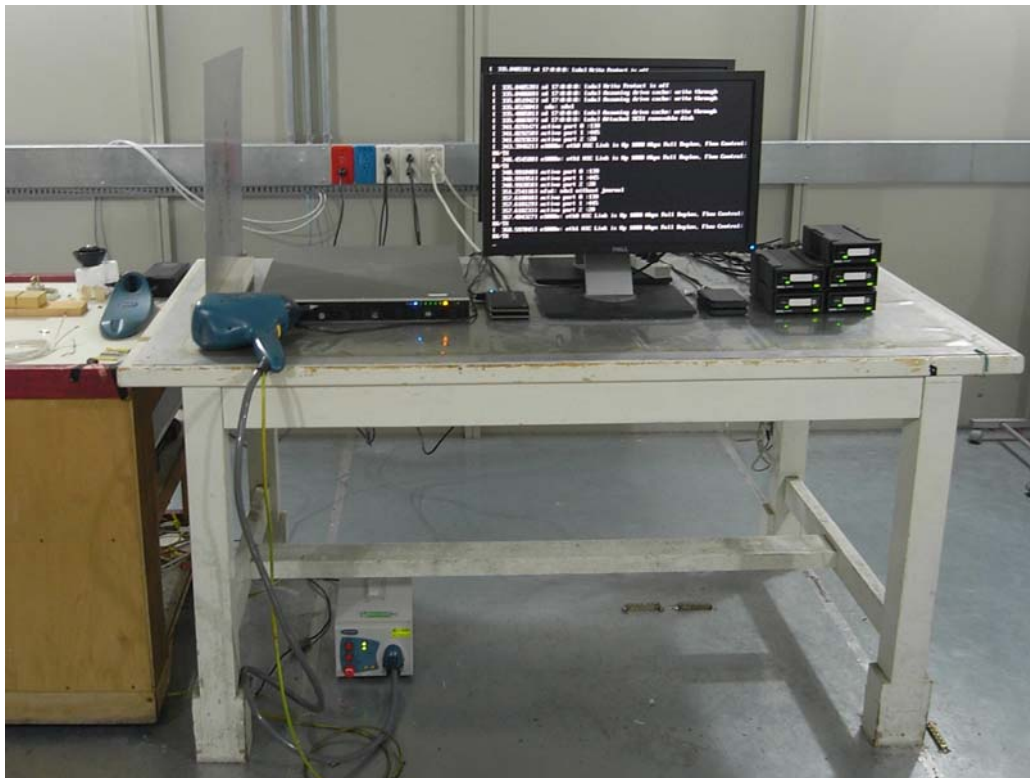


14.3.4 Photo of RF Field Strength Susceptibility Measurement



14.3.5 Photo of Electrical Fast Transient/Burst Measurement

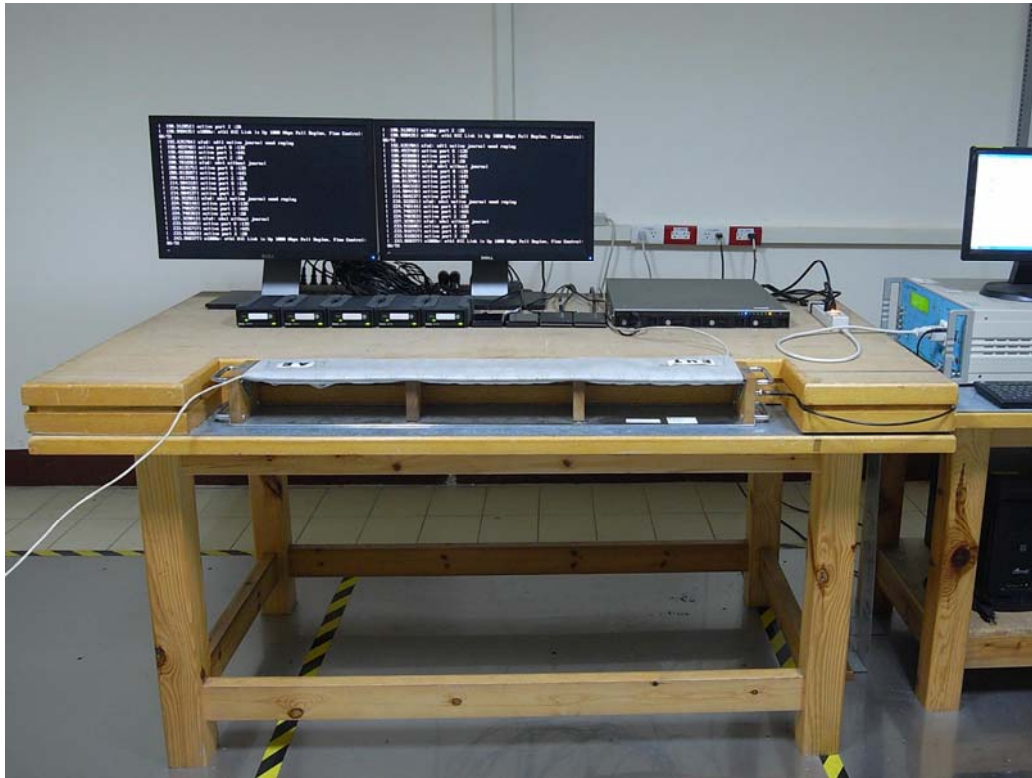

14.3.6 Photo of Surge Measurement

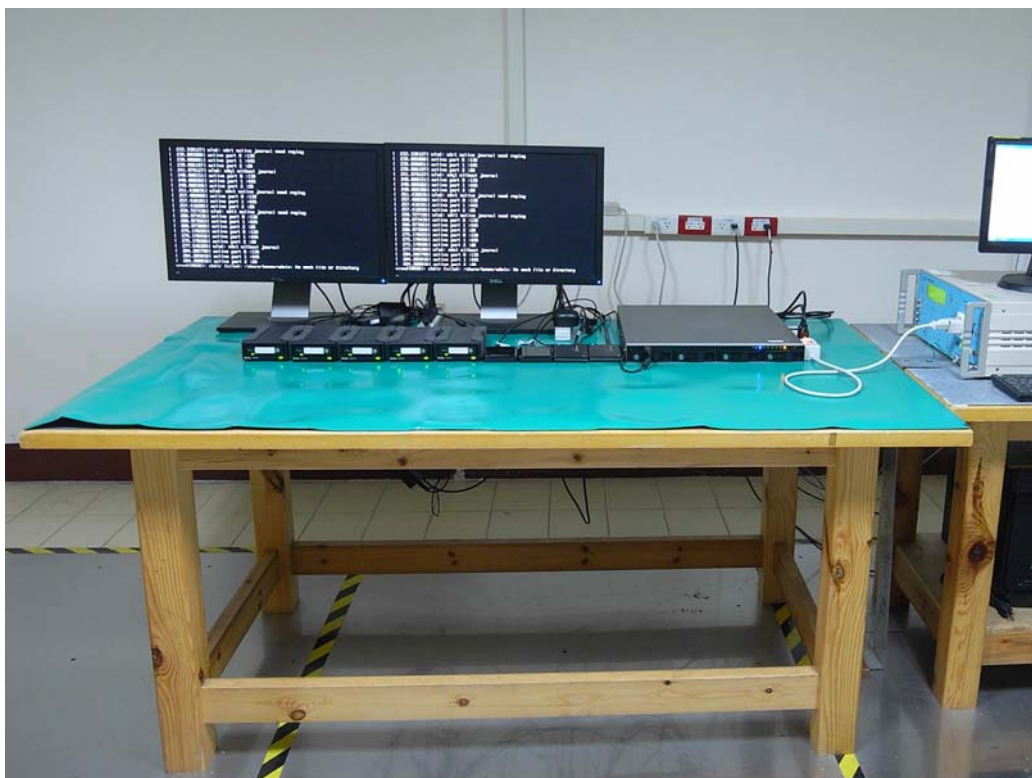


14.3.7 Photo of Conductive Measurement



14.3.8 Photo of Magnetic field Measurement



14.3.9 Photo of Voltage Dips Measurement

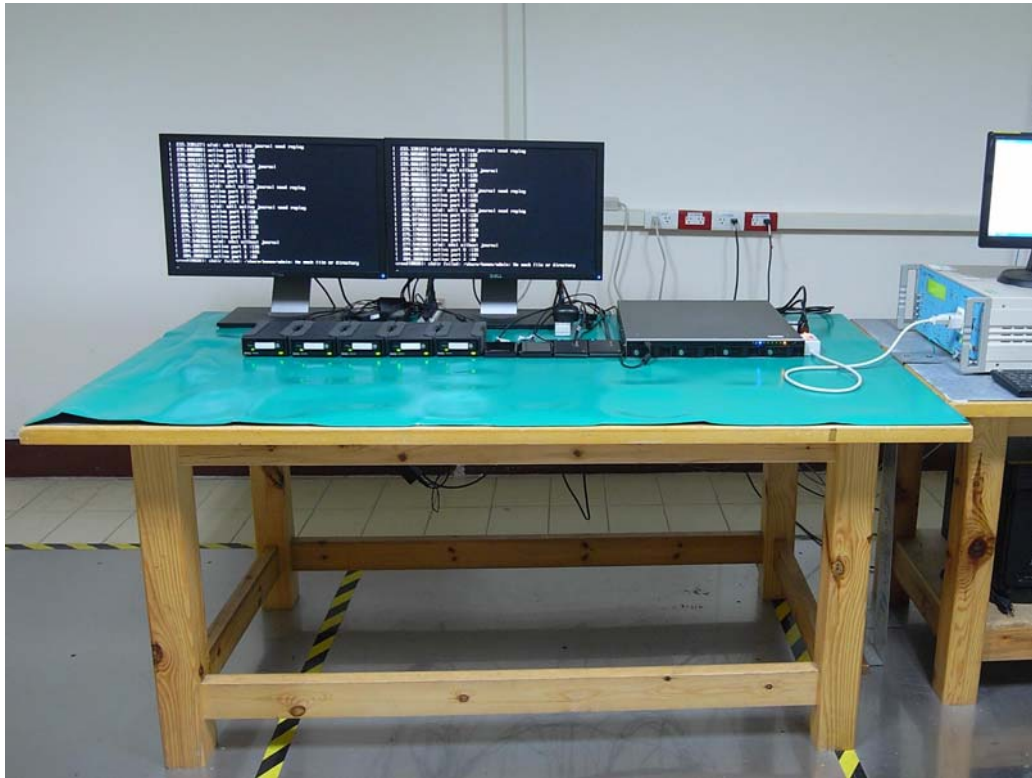

14.3.10 Photo of Harmonics and Voltage Fluctuations



14.4 Appendix D: Photographs of EUT

Please refer to the File of ISL-12HE167P