

# Certificate

Issue Date: January 23, 2015  
Ref. Report No. ISL-13LE459CE-R3

Product Name : Network Attached Storage  
Models : TS-1271U-RP; TS-871U-RP; TS-871U-RP+; TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP; NAS-871UG-RP; NAS-1271UG-RP; NAS-871UG-RP+; NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG II-RP; WB-871U-RP; WB-1271U-RP; TVS-871U-RP; TVS-1271U-RP; TVS-871U II-RP; TVS-1271U II-RP; TVS-871U-RP+; TVS-1271U-RP+  
Brand : QNAP  
Responsible Party : QNAP Systems, Inc.  
Address : 3F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :



**Standards:**

EN 55022: 2010+AC2011 and CISPR 22: 2008 (modified)  
EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009  
EN 61000-3-3: 2013 and IEC 61000-3-3: 2013  
EN 55024: 2010 and CISPR 24: 2010  
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008  
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and IEC 61000-4-3:2006+A1: 2007+A2: 2010  
EN 61000-4-4:2012 and IEC 61000-4-4:2012  
EN 61000-4-5: 2006 and IEC 61000-4-5: 2005  
EN 61000-4-6: 2009 and IEC 61000-4-6: 2008  
EN 61000-4-8: 2010 and IEC 61000-4-8: 2009  
EN 61000-4-11: 2004 and IEC 61000-4-11: 2004

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**International Standards Laboratory**

  
Jim Chu / Director

☒ **Hsi-Chih LAB:**

No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,  
New Taipei City 221, Taiwan  
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



# **CE MARK TECHNICAL FILE**

## **AS/NZS EMC CONSTRUCTION FILE**

of

Product Name

**Network Attached Storage**

Models

**TS-1271U-RP; TS-871U-RP; TS-871U-RP+;  
TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP;  
NAS-871UG-RP; NAS-1271UG-RP; NAS-871UG-RP+;  
NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG  
II-RP; WB-871U-RP; WB-1271U-RP; TVS-871U-RP;  
TVS-1271U-RP; TVS-871U II-RP; TVS-1271U II-RP;  
TVS-871U-RP+; TVS-1271U-RP+**

Brand

**QNAP**

Contains:

1. Declaration of Conformity
2. EN55022/CISPR 22, AS/NZS CISPR 22 EMI test report
3. EN55024/CISPR 24, EN61000-3-2 / IEC 61000-3-2, and EN61000-3-3 / IEC 61000-3-3 test report
4. Certificate of EN60950-1
5. Block Diagram and Schematics
6. Users' manual

## Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 3F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

Declares that product: Network Attached Storage

Models: TS-1271U-RP; TS-871U-RP; TS-871U-RP+;  
TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP;  
NAS-871UG-RP; NAS-1271UG-RP;  
NAS-871UG-RP+; NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG II-RP; WB-871U-RP;  
WB-1271U-RP; TVS-871U-RP; TVS-1271U-RP;  
TVS-871U II-RP; TVS-1271U II-RP;  
TVS-871U-RP+; TVS-1271U-RP+

Brand: QNAP

Assembled by: Same as above

Address: Same as above

Conforms to the EMC Directive 2004/108/EC as attested by conformity with the following harmonized standards:

EN 55022:2010+AC:2011, CISPR 22:2008 (modified) and AS/NZS CISPR 22:2009+A1:2010: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.  
EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2006 IEC 61000-4-5:2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004 IEC 61000-4-11:2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

<to be continued>

Standard	Description	Results
EN 61000-3-2:2006 +A1:2009 +A2:2009 IEC 61000-3-2:2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013 IEC 61000-3-3:2013	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

Conforms to the Low Voltage Directive 2006/95/EC, 93/68/EEC as attested by conformity with the following harmonized standard:

EN60950-1:2006+A11:2009+A1:2010+A12:2011: Safety of Information Technology Equipment Including electrical business equipment

*We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.*

-----  
QNAP Systems, Inc.

**Date: January 23, 2015**

## Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 3F, No.22, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan

Declares that product: Network Attached Storage

Models: TS-1271U-RP; TS-871U-RP; TS-871U-RP+;  
TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP;  
NAS-871UG-RP; NAS-1271UG-RP;  
NAS-871UG-RP+; NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG II-RP; WB-871U-RP;  
WB-1271U-RP; TVS-871U-RP; TVS-1271U-RP;  
TVS-871U II-RP; TVS-1271U II-RP;  
TVS-871U-RP+; TVS-1271U-RP+

Brand: QNAP

Assembled by: Same as above

Address: Same as above

Conforms to the EMI part of RCM Mark requirements as attested by conformity with the following standards:

EN 55022:2010+AC:2011, CISPR 22:2008 (modified) and AS/NZS CISPR 22:2009+A1:2010: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.  
EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2006 IEC 61000-4-5:2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004 IEC 61000-4-11:2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

<to be continued>

Standard	Description	Results
EN 61000-3-2:2006 +A1:2009 +A2:2009 IEC 61000-3-2:2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013 IEC 61000-3-3:2013	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

*We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.*

-----  
QNAP Systems, Inc.

**Date: January 23, 2015**

# **CE TEST REPORT**

of

## **EN55022 / CISPR 22 / AS/NZS CISPR 22 Class A EN55024 / CISPR 24 / IMMUNITY EN61000-3-2 / EN61000-3-3**

Product : **Network Attached Storage**

Models: **TS-1271U-RP; TS-871U-RP; TS-871U-RP+;  
TS-1271U-RP+; TS-871U II-RP; TS-1271U  
II-RP; NAS-871UG-RP; NAS-1271UG-RP;  
NAS-871UG-RP+; NAS-1271UG-RP+;  
NAS-871UG II-RP; NAS-1271UG II-RP;  
WB-871U-RP; WB-1271U-RP;  
TVS-871U-RP; TVS-1271U-RP; TVS-871U  
II-RP; TVS-1271U II-RP; TVS-871U-RP+;  
TVS-1271U-RP+**

Brand: **QNAP**

Applicant: **QNAP Systems, Inc.**

Address: **3F, No.22, Zhongxing Rd., Xizhi Dist., New  
Taipei City 221, Taiwan**

Test Performed by:

**International Standards Laboratory**

<Hsi-Chih LAB>

\*Site Registration No.

BSMI:SL2-IN-E-0037; SL2-R1/R2-E-0037; TAF: 1178

FCC: TW1067; IC: IC4067A-1; NEMKO: ELA 113A

VCCI: <Conduction01>C-354, T-1749, <OATS01>R-341,

<Chamber01>G-443

\*Address:

No. 65, Gu Dai Keng Street,

Hsi-Chih Dist., New Taipei City 221, Taiwan

\*Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Report No.: **ISL-13LE459CE-R3**

Issue Date : **January 23, 2015**

This report totally contains 67 pages including this cover page and contents page.

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data .....	1
1.2	Test Standards .....	2
1.3	Description of EUT .....	4
1.4	Description of Support Equipment .....	7
1.5	Software for Controlling Support Unit.....	8
1.6	I/O Cable Condition of EUT and Support Units .....	9
2.	Power Main Port Conducted Emissions .....	10
2.1	Test Setup and Procedure .....	10
2.2	Conduction Test Data: Configuration 1 .....	11
2.3	Test Setup Photo.....	13
3.	Telecommunication Port Conducted Emissions .....	15
3.1	Test Setup and Procedure .....	15
3.2	Test Data: LAN--10M: Configuration 1.....	16
3.3	Test Data: LAN--100M: Configuration 1.....	17
3.4	Test Data: LAN--GIGA (Voltage): Configuration 1 .....	18
3.5	Test Data: LAN--10M: Configuration 2.....	19
3.6	Test Data: LAN--100M: Configuration 2.....	20
3.7	Test Data: LAN--GIGA (Voltage): Configuration 2.....	21
3.8	Test Data: LAN--10M: Configuration 3.....	22
3.9	Test Data: LAN--100M: Configuration 3.....	23
3.10	Test Data: LAN--GIGA (Voltage): Configuration 3 .....	24
3.11	Test Data: LAN--10M: Configuration 4 .....	25
3.12	Test Data: LAN--100M: Configuration 4 .....	26
3.13	Test Data: LAN--GIGA (Voltage): Configuration 4 .....	27
3.14	Test Setup Photo .....	28
4.	Radiated Disturbance Emissions .....	29
4.1	Test Setup and Procedure .....	29
4.2	Radiation Test Data: Configuration 1.....	31
4.3	Test Setup Photo.....	35
5.	Electrostatic discharge (ESD) immunity .....	37
5.1	Test Specification .....	37
5.2	Test Setup .....	37
5.3	Test Result .....	37
5.4	Test Point.....	38
5.5	Test Setup Photo.....	39
6.	Radio-Frequency, Electromagnetic Field immunity.....	40
6.1	Test Specification .....	40
6.2	Test Setup .....	40
6.3	Test Result .....	40
6.4	Test Setup Photo.....	41
7.	Electrical Fast transients/burst immunity .....	42
7.1	Test Specification .....	42
7.2	Test Setup .....	43
7.3	Test Result .....	43
7.4	Test Setup Photo.....	44
8.	Surge Immunity .....	45
8.1	Test Specification .....	45



8.2	Test Setup .....	45
8.3	Test Result .....	45
8.4	Test Setup Photo .....	46
9.	Immunity to Conductive Disturbance .....	47
9.1	Test Specification .....	47
9.2	Test Setup .....	47
9.3	Test Result .....	47
9.4	Test Setup Photo .....	48
10.	Power Frequency Magnetic Field immunity .....	49
10.1	Test Specification .....	49
10.2	Test Setup .....	49
10.3	Test Result .....	49
10.4	Test Setup Photo .....	50
11.	Voltage Dips, Short Interruption and Voltage Variation immunity .....	51
11.1	Test Specification .....	51
11.2	Test Setup .....	51
11.3	Test Result .....	51
11.4	Test Setup Photo .....	52
12.	Harmonics .....	53
12.1	Test Specification .....	53
12.2	Test Setup .....	53
12.3	Test Result .....	53
12.4	Test Data .....	54
12.5	Test Setup Photo .....	56
13.	Voltage Fluctuations .....	57
13.1	Test Specification .....	57
13.2	Test Setup .....	57
13.3	Test Result .....	57
13.4	Test Data .....	58
13.5	Test Setup Photo .....	59
14.	Appendix .....	60
14.1	Appendix A: Test Equipment .....	60
14.2	Appendix B: Uncertainty of Measurement .....	63
14.3	Appendix C: Photographs of EUT Please refer to the File of ISL-13LE459P-R3 64	

## 1. General

### 1.1 Certification of Accuracy of Test Data

**Standards:** Please refer to 1.2

**Equipment Tested:** Network Attached Storage

**Models:** TS-1271U-RP; TS-871U-RP; TS-871U-RP+;  
TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP;  
NAS-871UG-RP; NAS-1271UG-RP; NAS-871UG-RP+;  
NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG  
II-RP; WB-871U-RP; WB-1271U-RP; TVS-871U-RP;  
TVS-1271U-RP; TVS-871U II-RP; TVS-1271U II-RP;  
TVS-871U-RP+; TVS-1271U-RP+

**Brand:** QNAP

**Applicant:** QNAP Systems, Inc.

**Sample received Date:** January 12, 2015

**Final test Date:** EMI: refer to the date of test data  
EMS: January 22, 2015

**Test Site:** International Standards Laboratory  
OATS 01; Chamber 01; Conduction 01; Immunity 01

**Test Distance:** 10M; 3M (above 1GHz) (EMI test)


**Temperature:** refer to each site test data


**Humidity:** refer to each site test data

**Input power:** Conduction input power: AC 230 V / 50 Hz  
Radiation input power: AC 230 V / 50 Hz  
Immunity input power: AC 230 V / 50 Hz

**Test Result:** PASS

**Report Engineer:** Winnie Huang

**Test Engineer:**   
Joe WC Liao

**Approved By:**   
Eddy Hsiung

## 1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the following

EN 55022:2010+AC:2011, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009+A1:2010: Class A: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.  
EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2006 IEC 61000-4-5:2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004 IEC 61000-4-11:2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2:2006 +A1:2009 +A2:2009 IEC 61000-3-2:2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013 IEC 61000-3-3:2013	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

### **1.2.1 Performance Criteria for Compliance: EN 55024**

#### **Performance criterion A**

During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

#### **Performance criterion B**

After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

#### **Performance criterion C**

During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

### 1.3 Description of EUT

## EUT

Product Name	Network Attached Storage
Condition	Pre-Production
Model Numbers	TS-1271U-RP; TS-871U-RP; TS-871U-RP+; TS-1271U-RP+; TS-871U II-RP; TS-1271U II-RP; NAS-871UG-RP; NAS-1271UG-RP; NAS-871UG-RP+; NAS-1271UG-RP+; NAS-871UG II-RP; NAS-1271UG II-RP; WB-871U-RP; WB-1271U-RP; TVS-871U-RP; TVS-1271U-RP; TVS-871U II-RP; TVS-1271U II-RP; TVS-871U-RP+; TVS-1271U-RP+
Serial Number	N/A
Power Supply	ZIPPPY ( Model : M1P-2500V)
	AC Input: 100-240Vac, 47-63Hz 8-4A
	DC Output: +12V, 41A; +5VSB 0-3.5A
	DELTA (Model: DPS-500AB-9 A)
	AC Input: 100-240Vac, 50-60Hz 7-3.5A
	DC Output: +12V, 40.2A; +5VSB 3.52A
CPU	DELTA (Model: DPS-250AB-81A)
	Input: 100-240V, 5A-2.5A, 50-60Hz
	Output: +12V, 20A; +5VSB 2A
	Model: Intel® Core™ i3-4130 Processor; 3.4GHz or
	Model: Intel® Core™ i3-4340 Processor; 3.6GHz or
	Model: Intel® Core™ i3-4330 Processor; 3.5GHz or
	Model: Intel® Xeon E3-1275V3; 3.5GHz or
	Model: Intel® Xeon E3-1245V3; 3.4GHz or
	Model: Intel® Xeon E3-1225V3; 3.2GHz or
	Model: Intel® Celeron G1820; 2.7GHz or
	Model: Intel® Xeon E3-1246V3; 3.5GHz or
	Model: Intel® Xeon E3-1231V3; 3.4GHz or
Motherboard	Model: Intel® Xeon E3-1226V3 ; 3.3GHz or
	Model: Intel® Core i3-4150; 3.5GHz or
	Model: Intel® PENTINM G3250 3.2GHz (Add)
SATA Board	Model: TS-EC2480U-RP
Memory	Model: TS-1271U-RP
	4GB; DDR3; 1600MHz or
	8GB; DDR3; 1600MHz or
	2GB; DDR3; 1600MHz or
USB Flash	Transcend 8GB DDR3 1600MHz (Add)
USB Flash	one
HDMI Port	one 19-pins
RJ45 Port	four 8-pins (10/100/1000Mbps)
USB 3.0 Port	four 9-pins
USB 2.0 Port	four 4-pins
Power Switch	one

Reset Switch	one
AC Power Port	two
Maximum Operating Frequency	3.2GHz

#### Radiation & Conduction & EMS Configurations

Configurations	CPU	Power Supply
1	Intel® PENTINM G3250 3.2GHz (Add)	DELTA (Model: DPS-500AB-9 A)*2

#### Telecom Configurations

Configurations	CPU	Power Supply	RJ45 Port
1	Intel® PENTINM G3250 3.2GHz (Add)	DELTA (Model: DPS-500AB-9 A)*2	Port1
2			Port2
3			Port3
4			Port4

#### Different Model list:

Model	Logo	Market
TS-871U-RP	QNAP Carton	Different Marketing
TS-1271U-RP	QNAP Carton	
TS-871U-RP+	QNAP Carton	
TS-1271U-RP+	QNAP Carton	
TS-871U II-RP	QNAP Carton	
TS-1271U II-RP	QNAP Carton	
NAS-871UG-RP	Generic Carton	
NAS-1271UG-RP	Generic Carton	
NAS-871UG-RP+	Generic Carton	
NAS-1271UG-RP+	Generic Carton	
NAS-871UG II-RP	Generic Carton	
NAS-1271UG II-RP	Generic Carton	
WB-871U-RP	QNAP Carton	
WB-1271U-RP	QNAP Carton	
TVS-871U-RP	QNAP Carton	
TVS-1271U-RP	QNAP Carton	
TVS-871U II-RP	QNAP Carton	
TVS-1271U II-RP	QNAP Carton	
TVS-871U-RP+	QNAP Carton	
TVS-1271U-RP+	QNAP Carton	

#### EMI Noise Source

Motherboard Crystal	25MHz( Y2)	The same as Photo EUT-14
	32.768KHz (Y1)	The same as Photo EUT-15
	25MHz (Y3)	The same as Photo EUT-16
	25MHz (Y4)	The same as Photo EUT-17
	25MHz (Y5)	The same as Photo EUT-18
	25MHz (Y6)	The same as Photo EUT-19
SATA board Crystal	25MHz (Y1)	The same as Photo EUT-20
	25MHz (Y2)	The same as Photo EUT-21
	25MHz (Y3)	The same as Photo EUT-22
	25MHz (Y4)	The same as Photo EUT-23
	25MHz (Y5)	The same as Photo EUT-24
	25MHz (Y6)	The same as Photo EUT-25
	25MHz (Y7)	The same as Photo EUT-26
	25MHz (Y8)	The same as Photo EUT-27
USB Flash Crystal	12MHz (Y1)	The same as Photo EUT-28

#### EMI Solution

N/A

#### 1.4 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
Notebook Personal Computer	U36JC S/N: N/A	ASUS	Non-shielded, Detachable	FCC DOC
Rack mountable Switch	DGS-1008D	D-Link	Non-shielded, Detachable	FCC DOC
24" LCD Monitor	U2413f S/N: NA	DELL	Non-shielded, Detachable	FCC DOC
USB3.0 External HDD Enclosure*4	WDBACY5000ABK-PESN S/N: XH1E31FSV80	WD	N/A	FCC DOC
USB2.0 External HDD Enclosure *4	Ipod nano S/N: N/A	Apple	N/A	FCC DOC
3.5" SATA Hard Disk*12	WD500AADS	WD	N/A	FCC DOC



### 1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Send EUT Information to the video port device (LED Monitor).
- B. Read and write to the disk drives.
- C. Send package to the Router LAN port (Router).
- D. Receive and transmit package of EUT to the Rack mountable Switch HUB through LAN port.
- E. Used Tfggen.exe to send signal to EUT RJ45 port through PC RJ45 port.
- F. Read and write data in the USB2.0 External HDD Enclosure through USB2.0 port.
- G. Read and write data in the USB3.0 External HDD Enclosure through EUT USB3.0 port.
- H. Search External HDD from PC RJ45 to EUT RJ45 with Finder.exe.
- I. Repeat the above steps.

	File name	Issued Date
USB2.0 External HDD	IntelEMC.exe	9/04/2000
USB3.0 External HDD Enclosure	IntelEMC.exe	9/04/2000
RJ45	ping.exe	05/05/1999
RJ45	Tfggen.exe	06/23/1999
EUT	Finder.exe	11/15/2008
EUT Hard Disk	IntelEMC.exe	9/04/2000


## 1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord*2	110V (~240V) to EUT SPS	1.8M	Non-shielded, Detachable	Plastic Head
USB3.0 Data Cable*4	USB3.0 External HDD Enclosure USB3.0 Port to EUT USB3.0 Port	1M	Shielded, Detachable	Metal Head
USB2.0 Data Cable *4	External HDD Enclosure USB Port to EUT USB 2.0 Port	1M	Shielded, Detachable	Metal Head
RJ45 Data Cable*4	EUT RJ45 Port to Switch HUB RJ45 Port	1.5M	Non-shielded, Detachable	RJ-45, with Plastic Head
RJ45 Data Cable	Switch HUB RJ45 Port to Notebook RJ45 Port	10M	Non-shielded, Detachable	RJ-45, with Plastic Head
Display Data Cable	EUT HDMI Port to LED Monitor HDMI Port	1.8M	Shielded, Detachable	Metal Head

## 2. Power Main Port Conducted Emissions

### 2.1 Test Setup and Procedure

#### 2.1.1 Test Setup

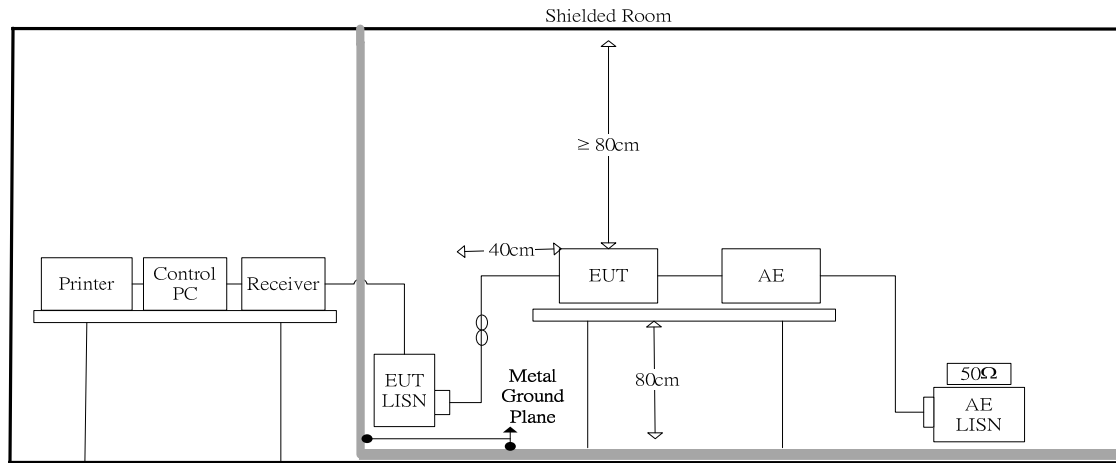

#### 2.1.2 Test Procedure

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conducting 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, were measured. All of the interface cables were manipulated according to EN 55022 requirements.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

#### 2.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

## 2.2 Conduction Test Data: Configuration 1

**Table 2.2.1 Power Line Conducted Emissions (Line)**

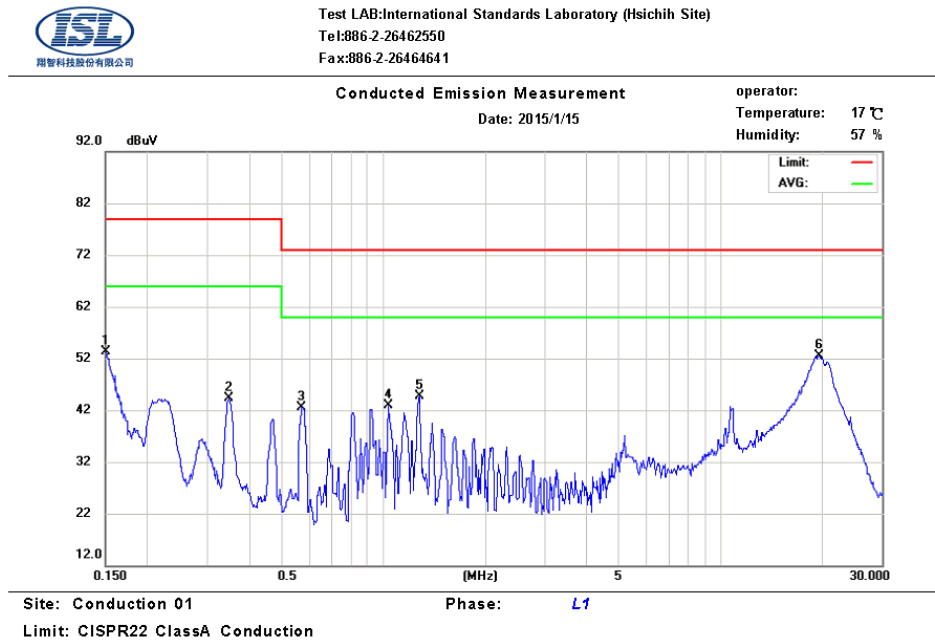

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.15	9.63	53.23	79.00	-25.77	53.23	66.00	-12.77	
2	0.35	9.63	44.26	79.00	-34.74	44.26	66.00	-21.74	
3	0.58	9.64	42.55	73.00	-30.45	42.55	60.00	-17.45	
4	1.04	9.66	42.91	73.00	-30.09	42.91	60.00	-17.09	
5	1.27	9.68	44.68	73.00	-28.32	44.68	60.00	-15.32	
6	19.48	9.82	52.57	73.00	-20.43	52.57	60.00	-7.43	

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor


Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

Table 2.2.2 Power Line Conducted Emissions (Neutral)

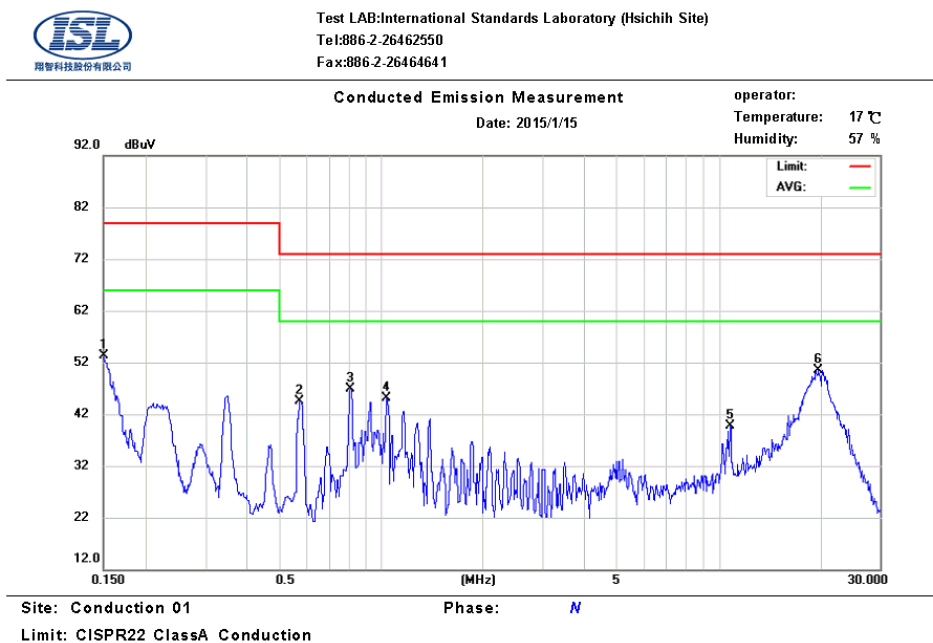

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.15	9.64	53.21	79.00	-25.79	53.21	66.00	-12.79	
2	0.58	9.64	44.41	73.00	-28.59	44.41	60.00	-15.59	
3	0.81	9.65	46.96	73.00	-26.04	46.96	60.00	-13.04	
4	1.04	9.65	45.20	73.00	-27.80	45.20	60.00	-14.80	
5	10.80	9.82	39.65	73.00	-33.35	39.65	60.00	-20.35	
6	19.68	10.01	50.52	73.00	-22.48	50.52	60.00	-9.48	

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

## 2.3 Test Setup Photo

Front View



Back View






## 3. Telecommunication Port Conducted Emissions

### 3.1 Test Setup and Procedure

#### 3.1.1 Test Setup

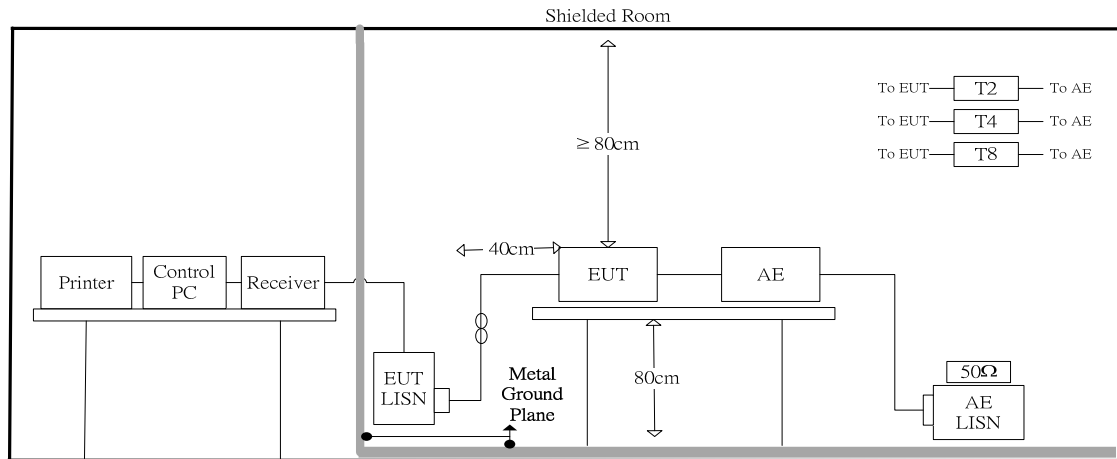

#### 3.1.2 Test Procedure

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

The EUT, any support equipment, and any interconnecting cables were arranged and moved to get the maximum measurement. All of the interface cables were manipulated according to EN 55022 requirements.

The port of the EUT was connected to the support equipment through the LISN and linked in normal condition.

AC input power for the EUT & the support equipment power outlets were obtained from the same filtered source that provided input power to the LISN.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information could be useful in reducing their amplitude.


#### 3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz



### 3.2 Test Data: LAN--10M: Configuration 1

Table 3.2.1 Telecommunication Port Conducted Emission

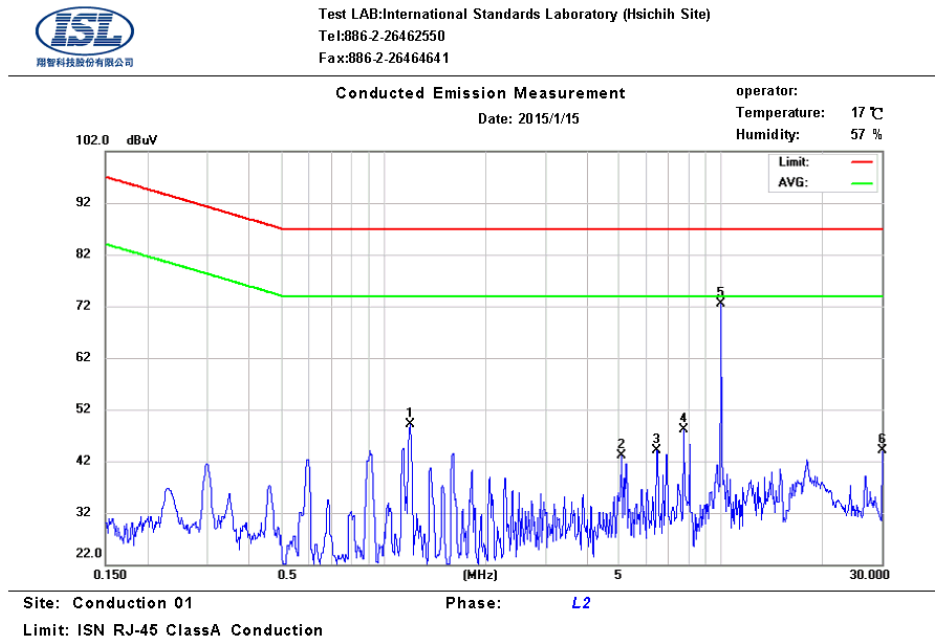

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	46.12	87.00	-40.88	43.72	74.00	-30.28	
2	5.08	9.61	38.10	87.00	-48.90	36.07	74.00	-37.93	
3	6.47	9.61	37.38	87.00	-49.62	32.65	74.00	-41.35	
4	7.75	9.60	35.04	87.00	-51.96	31.78	74.00	-42.22	
5	10.00	9.61	63.68	87.00	-23.32	45.34	74.00	-28.66	
6	30.00	10.03	44.83	87.00	-42.17	31.73	74.00	-42.27	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.3 Test Data: LAN--100M: Configuration 1

**Table 3.3.1 Telecommunication Port Conducted Emission**

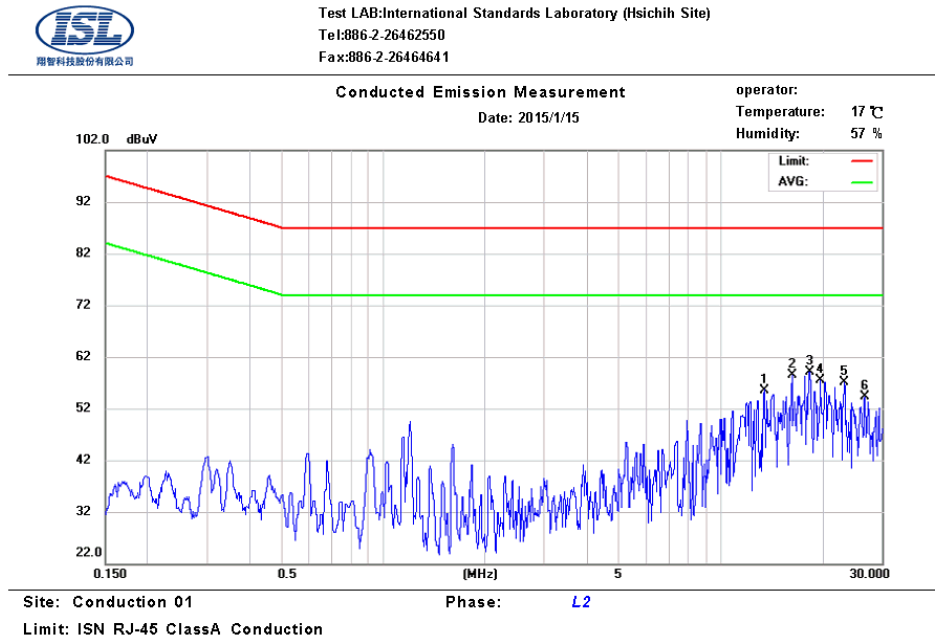

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	13.43	9.62	45.10	87.00	-41.90	42.74	74.00	-31.26	
2	16.23	9.65	54.43	87.00	-32.57	51.86	74.00	-22.14	
3	18.25	9.69	45.86	87.00	-41.14	44.29	74.00	-29.71	
4	19.73	9.73	39.22	87.00	-47.78	34.67	74.00	-39.33	
5	23.13	9.83	52.12	87.00	-34.88	50.24	74.00	-23.76	
6	26.63	9.93	35.07	87.00	-51.93	31.38	74.00	-42.62	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.4 Test Data: LAN--GIGA (Voltage): Configuration 1

Table 3.4.1 Telecommunication Port Conducted Emission

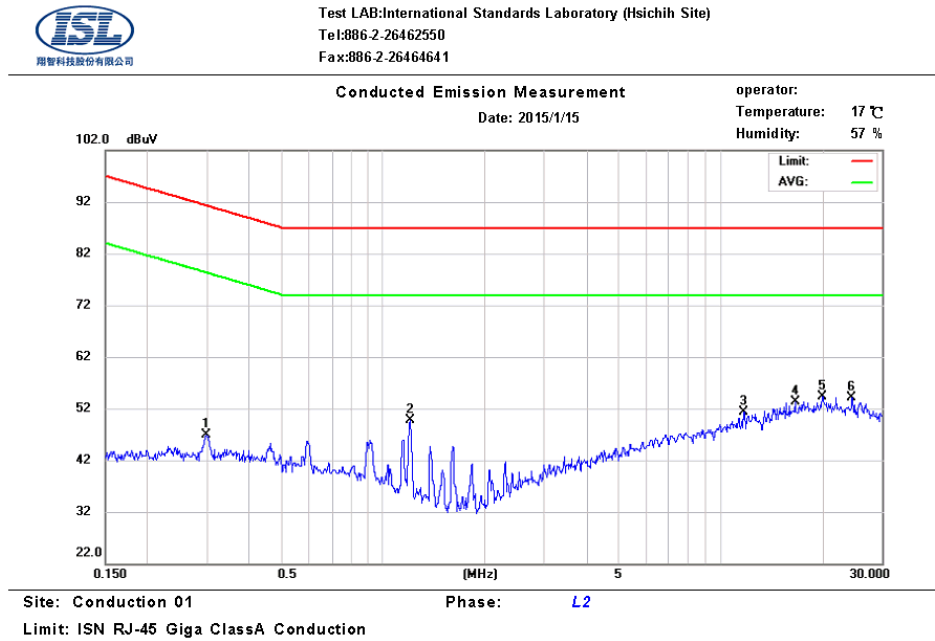

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.30	9.95	42.23	91.28	-49.05	38.91	78.28	-39.37	
2	1.20	9.70	46.31	87.00	-40.69	43.76	74.00	-30.24	
3	11.70	9.61	43.03	87.00	-43.97	37.48	74.00	-36.52	
4	16.52	9.67	45.29	87.00	-41.71	39.66	74.00	-34.34	
5	19.98	9.74	46.27	87.00	-40.73	40.54	74.00	-33.46	
6	24.40	9.87	45.21	87.00	-41.79	39.69	74.00	-34.31	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.5 Test Data: LAN--10M: Configuration 2

**Table 3.5.1 Telecommunication Port Conducted Emission**

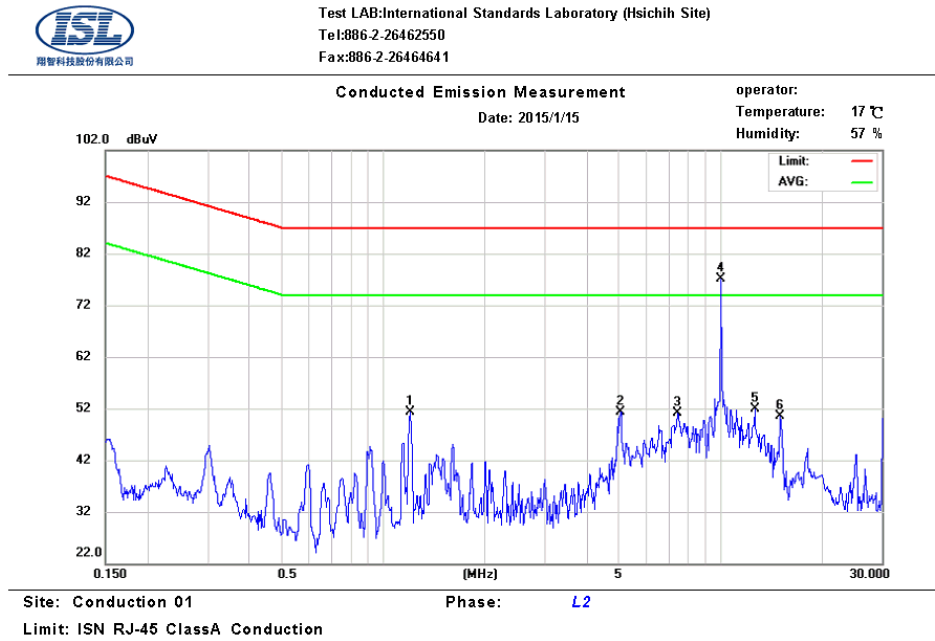

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	49.72	87.00	-37.28	48.32	74.00	-25.68	
2	5.05	9.61	42.79	87.00	-44.21	39.02	74.00	-34.98	
3	7.42	9.60	38.36	87.00	-48.64	36.21	74.00	-37.79	
4	10.00	9.61	65.09	87.00	-21.91	32.32	74.00	-41.68	
5	12.55	9.62	39.07	87.00	-47.93	34.48	74.00	-39.52	
6	14.93	9.64	36.37	87.00	-50.63	33.42	74.00	-40.58	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.6 Test Data: LAN--100M: Configuration 2

Table 3.6.1 Telecommunication Port Conducted Emission

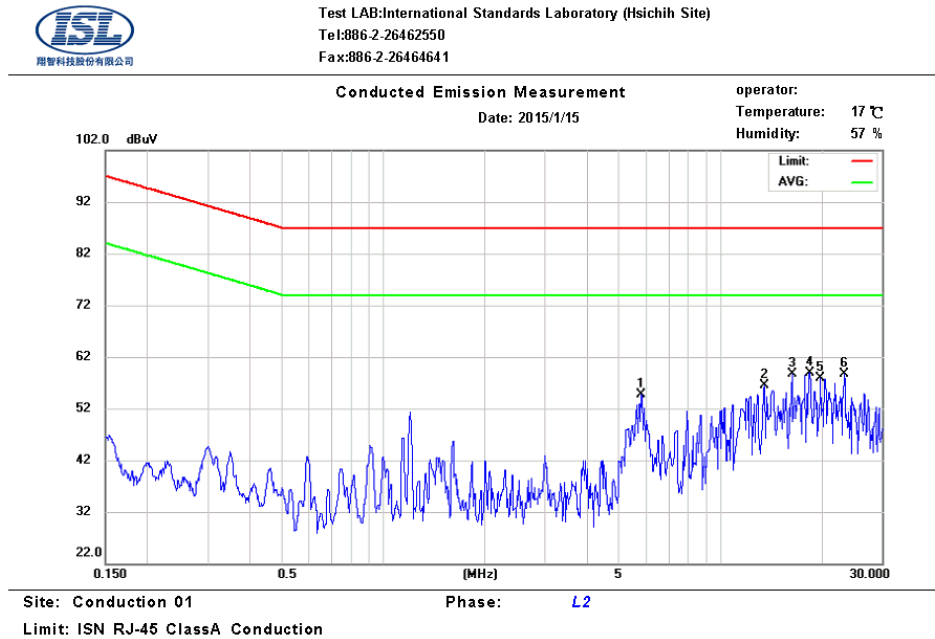

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	5.83	9.60	40.49	87.00	-46.51	35.23	74.00	-38.77	
2	13.43	9.62	45.38	87.00	-41.62	42.26	74.00	-31.74	
3	16.23	9.65	54.77	87.00	-32.23	51.68	74.00	-22.32	
4	18.25	9.69	45.37	87.00	-41.63	42.51	74.00	-31.49	
5	19.70	9.73	39.67	87.00	-47.33	32.47	74.00	-41.53	
6	23.13	9.83	53.90	87.00	-33.10	50.88	74.00	-23.12	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.7 Test Data: LAN--GIGA (Voltage): Configuration 2

Table 3.7.1 Telecommunication Port Conducted Emission

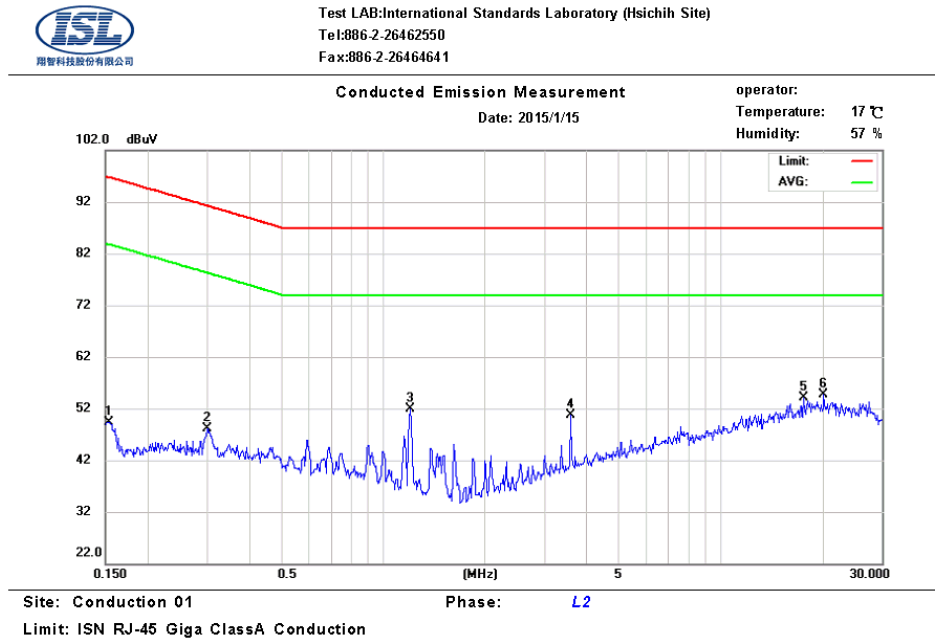

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.15	10.25	45.53	96.77	-51.24	43.84	83.77	-39.93	
2	0.30	9.95	41.65	91.26	-49.61	37.57	78.26	-40.69	
3	1.20	9.70	48.35	87.00	-38.65	46.52	74.00	-27.48	
4	3.58	9.63	33.93	87.00	-53.07	28.31	74.00	-45.69	
5	17.52	9.68	45.48	87.00	-41.52	39.91	74.00	-34.09	
6	20.15	9.74	46.02	87.00	-40.98	40.46	74.00	-33.54	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.8 Test Data: LAN--10M: Configuration 3

**Table 3.8.1 Telecommunication Port Conducted Emission**

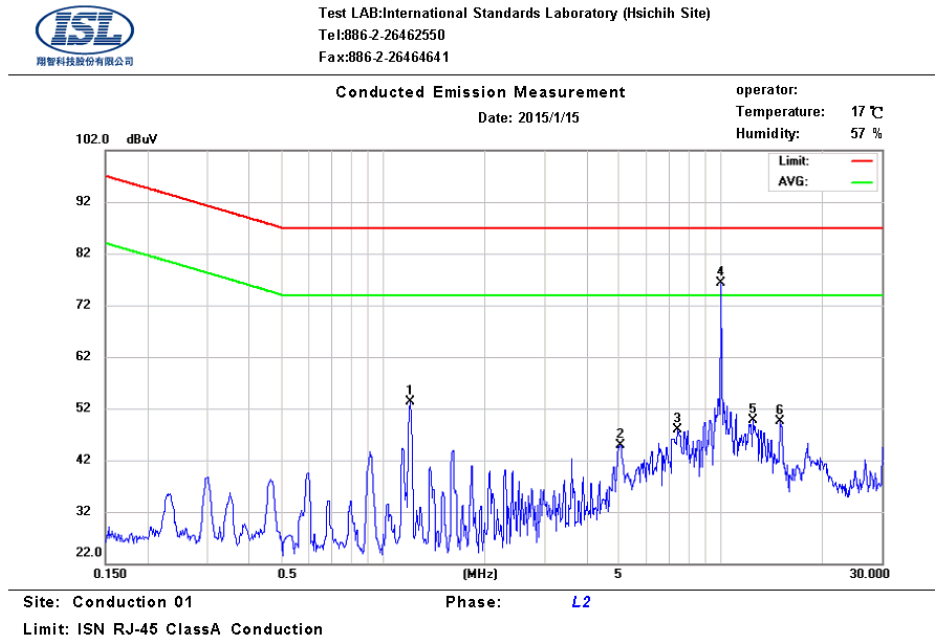

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	51.08	87.00	-35.92	49.34	74.00	-24.66	
2	5.05	9.61	38.50	87.00	-48.50	33.74	74.00	-40.26	
3	7.42	9.60	38.83	87.00	-48.17	35.18	74.00	-38.82	
4	10.00	9.61	65.26	87.00	-21.74	33.66	74.00	-40.34	
5	12.43	9.61	37.84	87.00	-49.16	32.65	74.00	-41.35	
6	14.93	9.64	35.54	87.00	-51.46	32.04	74.00	-41.96	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.9 Test Data: LAN--100M: Configuration 3

Table 3.9.1 Telecommunication Port Conducted Emission

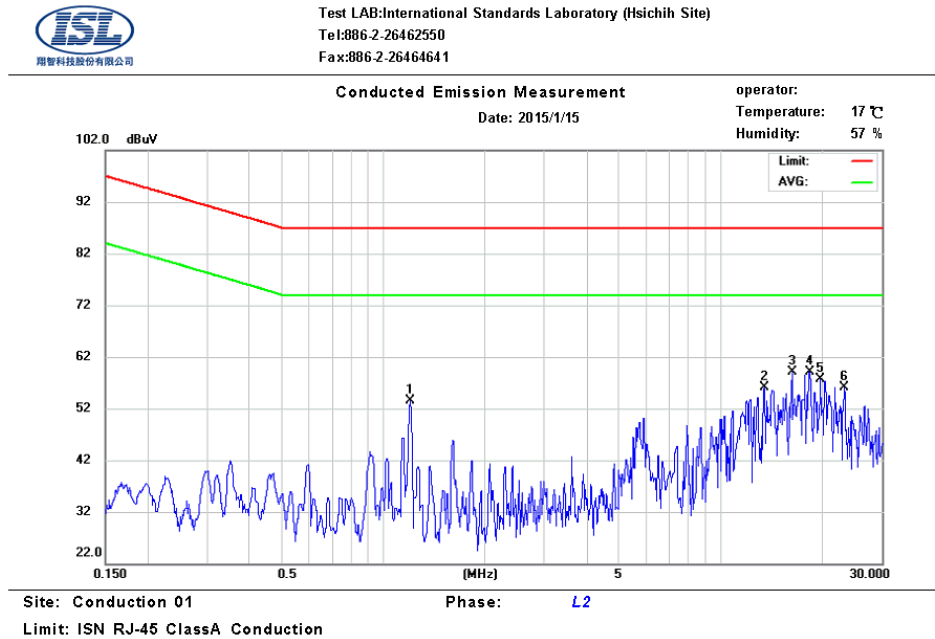

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	51.30	87.00	-35.70	49.49	74.00	-24.51	
2	13.43	9.62	45.68	87.00	-41.32	43.46	74.00	-30.54	
3	16.23	9.65	54.80	87.00	-32.20	52.56	74.00	-21.44	
4	18.25	9.69	46.15	87.00	-40.85	44.11	74.00	-29.89	
5	19.70	9.73	35.83	87.00	-51.17	31.52	74.00	-42.48	
6	23.13	9.83	51.58	87.00	-35.42	49.28	74.00	-24.72	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.



### 3.10 Test Data: LAN--GIGA (Voltage): Configuration 3

Table 3.10.1 Telecommunication Port Conducted Emission

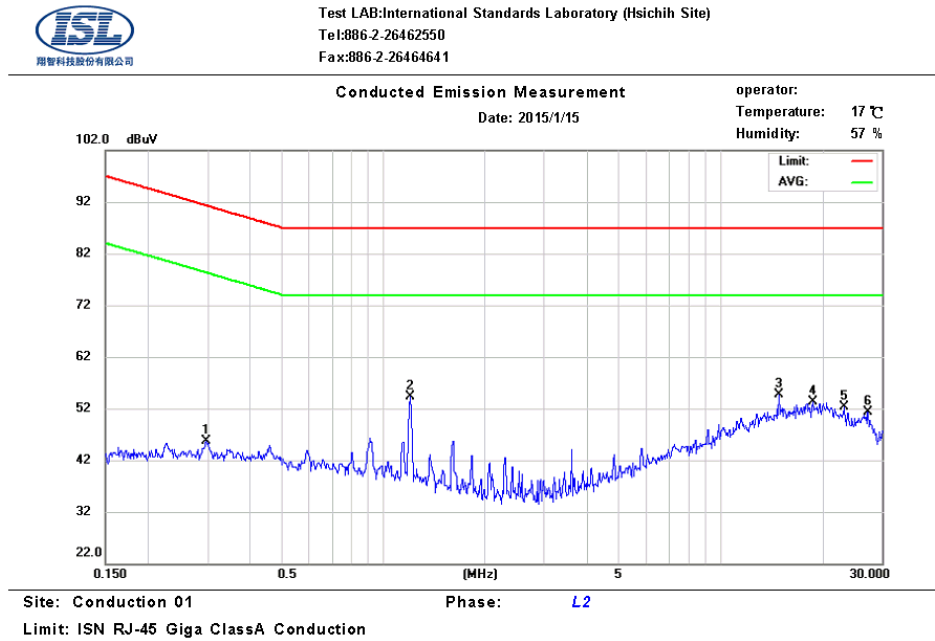

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.30	9.95	39.78	91.31	-51.53	35.29	78.31	-43.02	
2	1.20	9.70	51.24	87.00	-35.76	49.43	74.00	-24.57	
3	14.80	9.64	44.66	87.00	-42.34	39.10	74.00	-34.90	
4	18.70	9.70	45.74	87.00	-41.26	40.16	74.00	-33.84	
5	23.13	9.83	43.79	87.00	-43.21	38.14	74.00	-35.86	
6	27.15	9.94	43.30	87.00	-43.70	37.83	74.00	-36.17	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.11 Test Data: LAN--10M: Configuration 4

Table 3.11.1 Telecommunication Port Conducted Emission

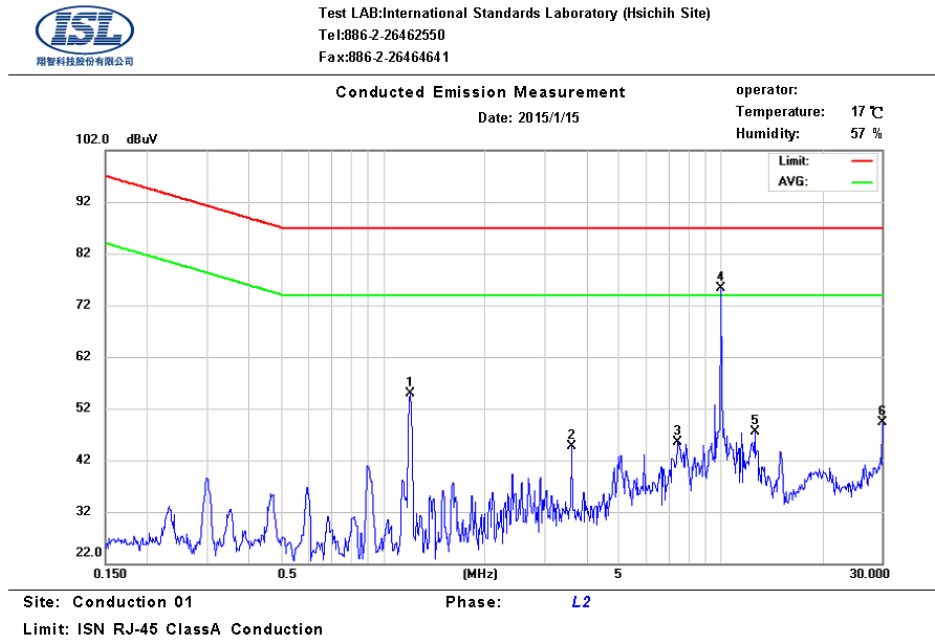

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	52.21	87.00	-34.79	50.59	74.00	-23.41	
2	3.60	9.63	43.33	87.00	-43.67	41.12	74.00	-32.88	
3	7.45	9.60	39.11	87.00	-47.89	35.25	74.00	-38.75	
4	10.00	9.61	65.24	87.00	-21.76	45.24	74.00	-28.76	
5	12.55	9.62	36.48	87.00	-50.52	32.25	74.00	-41.75	
6	30.00	10.03	50.41	87.00	-36.59	40.09	74.00	-33.91	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.12 Test Data: LAN--100M: Configuration 4

Table 3.12.1 Telecommunication Port Conducted Emission

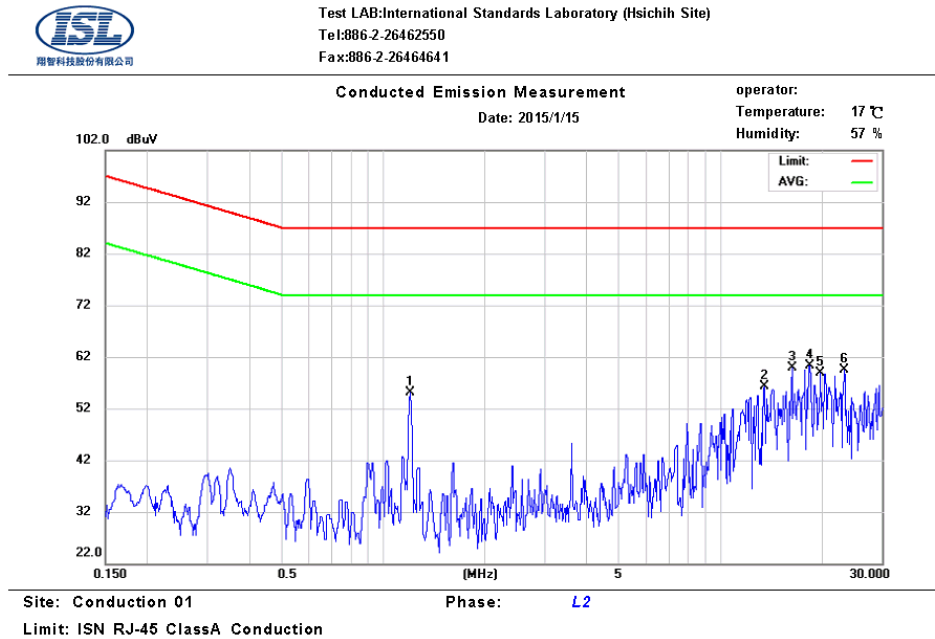

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	1.20	9.70	53.12	87.00	-33.88	51.61	74.00	-22.39	
2	13.43	9.62	45.21	87.00	-41.79	43.40	74.00	-30.60	
3	16.23	9.65	55.71	87.00	-31.29	53.73	74.00	-20.27	
4	18.25	9.69	46.31	87.00	-40.69	44.32	74.00	-29.68	
5	19.70	9.73	37.11	87.00	-49.89	33.40	74.00	-40.60	
6	23.13	9.83	54.68	87.00	-32.32	51.96	74.00	-22.04	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 3.13 Test Data: LAN--GIGA (Voltage): Configuration 4

Table 3.13.1 Telecommunication Port Conducted Emission

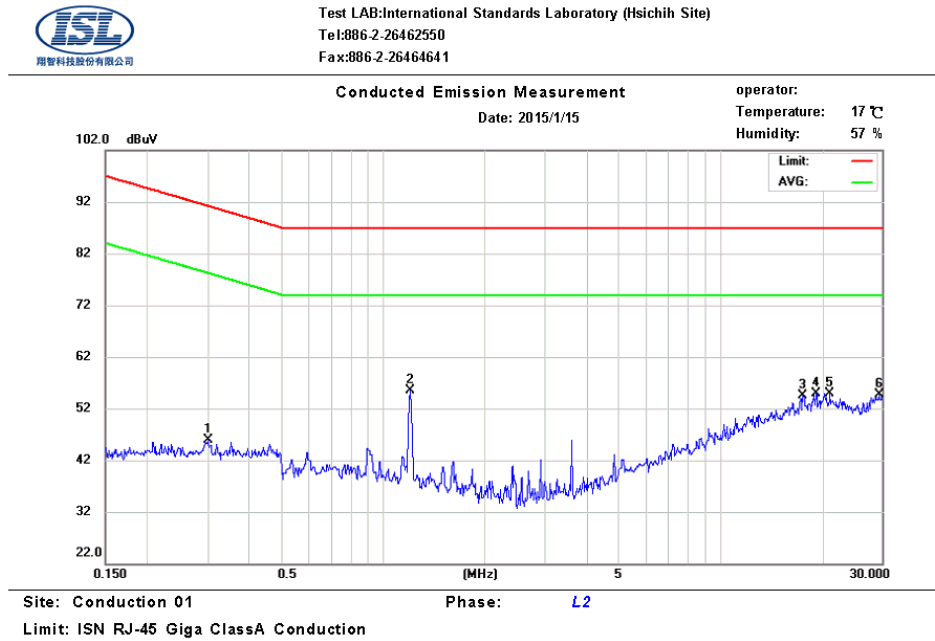

No.	Frequency (MHz)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)	Note
1	0.30	9.95	39.86	91.23	-51.37	34.70	78.23	-43.53	
2	1.20	9.70	53.15	87.00	-33.85	51.51	74.00	-22.49	
3	17.48	9.68	46.02	87.00	-40.98	40.54	74.00	-33.46	
4	19.13	9.72	46.64	87.00	-40.36	41.09	74.00	-32.91	
5	20.95	9.77	46.92	87.00	-40.08	41.36	74.00	-32.64	
6	29.35	10.01	47.82	87.00	-39.18	42.27	74.00	-31.73	

**Note :**

Margin = QP/AVG Emission - Limit

QP/AVG Emission = Receiver Reading + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.


### 3.14 Test Setup Photo

Refer to the Setup Photos for Power Main Port Conducted Emissions

## 4. Radiated Disturbance Emissions

### 4.1 Test Setup and Procedure

#### 4.1.1 Test Setup

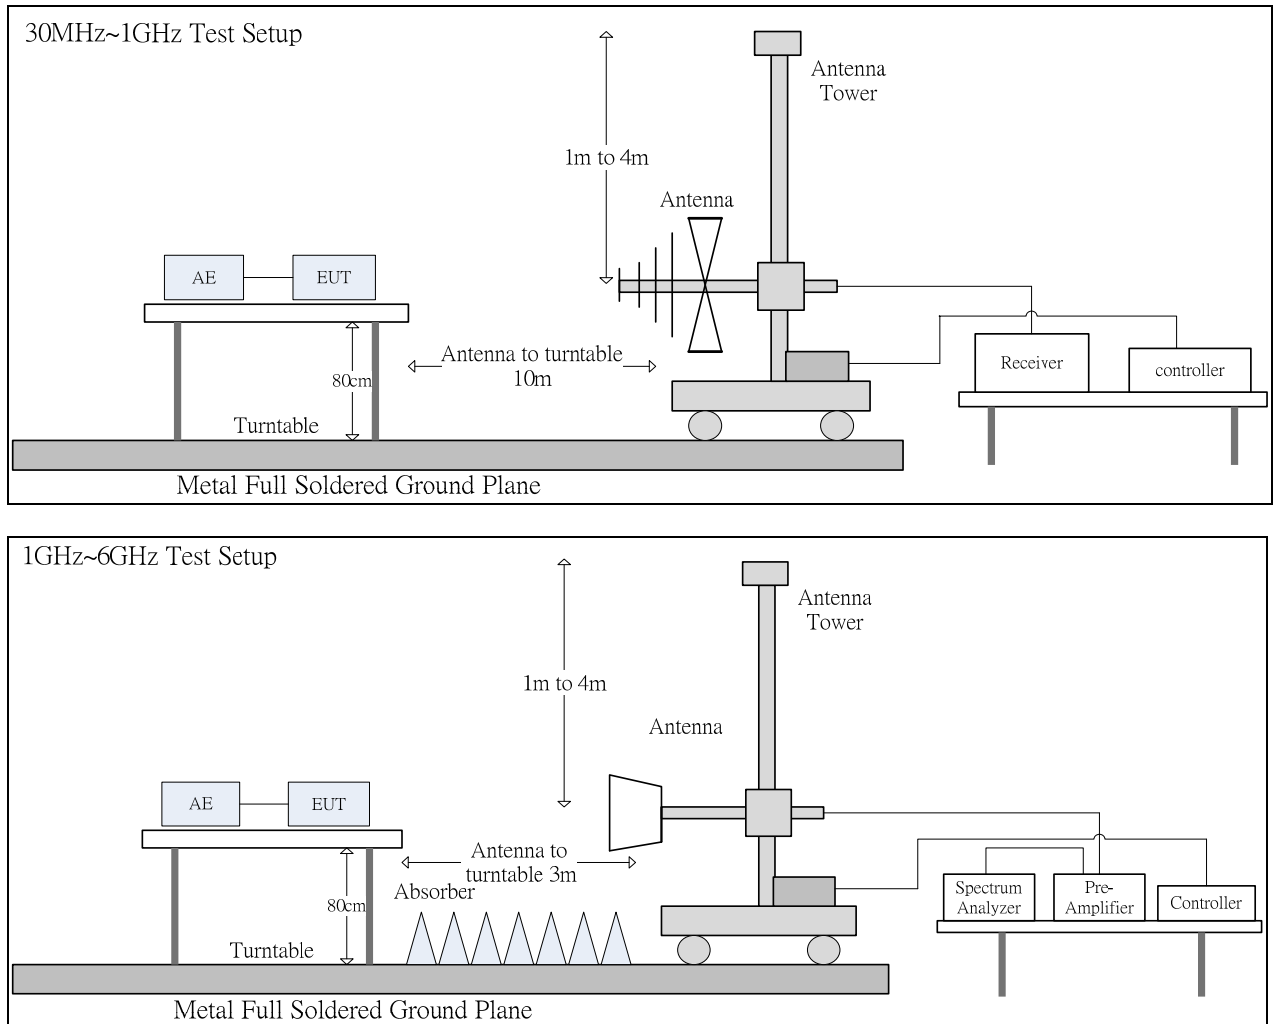

#### 4.1.2 Test Procedure

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter open field sites or 10 meter chamber. Desktop EUT are set up on a wooden stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. All of the interface cables were manipulated according to EN 55022 requirements.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.


#### **4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)**

Frequency Range:	30MHz--1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120KHz

Frequency Range:	Above 1 GHz to 6 GHz
Detector Function:	Peak/Average Mode
Resolution Bandwidth:	1MHz

## 4.2 Radiation Test Data: Configuration 1

Table 4.2.1 Radiated Emissions (Horizontal)

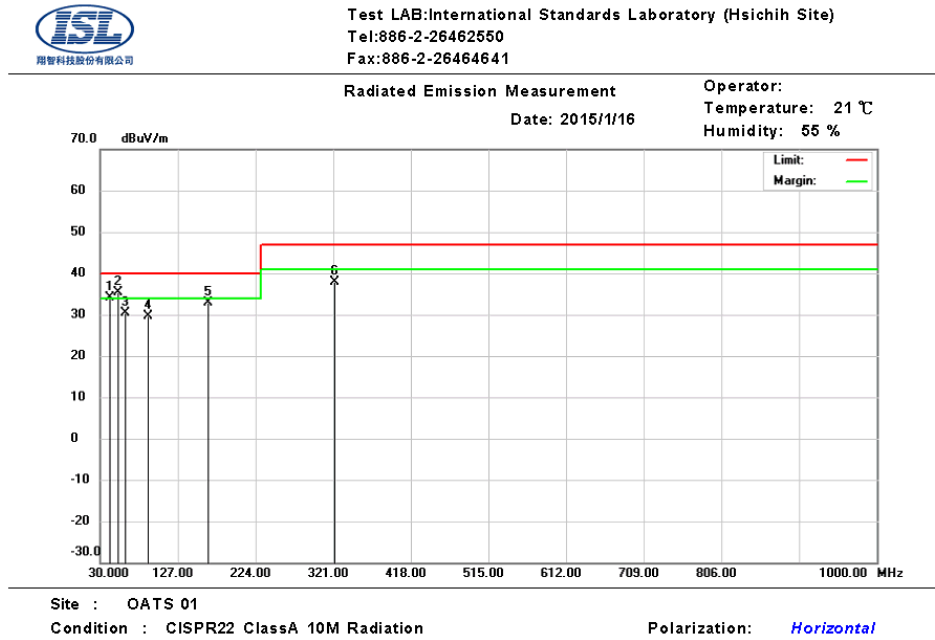

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	41.6400	20.89	13.31	34.20	40.00	-5.80	315	107	QP
2	52.3100	26.79	8.53	35.32	40.00	-4.68	100	205	QP
3	62.0100	21.59	8.78	30.37	40.00	-9.63	133	88	QP
4	89.7100	20.87	8.88	29.75	40.00	-10.25	100	216	QP
5	164.8300	19.21	13.56	32.77	40.00	-7.23	164	359	QP
6	322.9400	21.85	16.01	37.86	47.00	-9.14	100	174	QP

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.






Test LAB: International Standards Laboratory (Hsichih Site)  
Tel: 886-2-26462650  
Fax: 886-2-26464641

**Radiated Emission Measurement**

Operator:  
Temperature: 26 °C  
Humidity: 60 %

Date: 2015/1/20

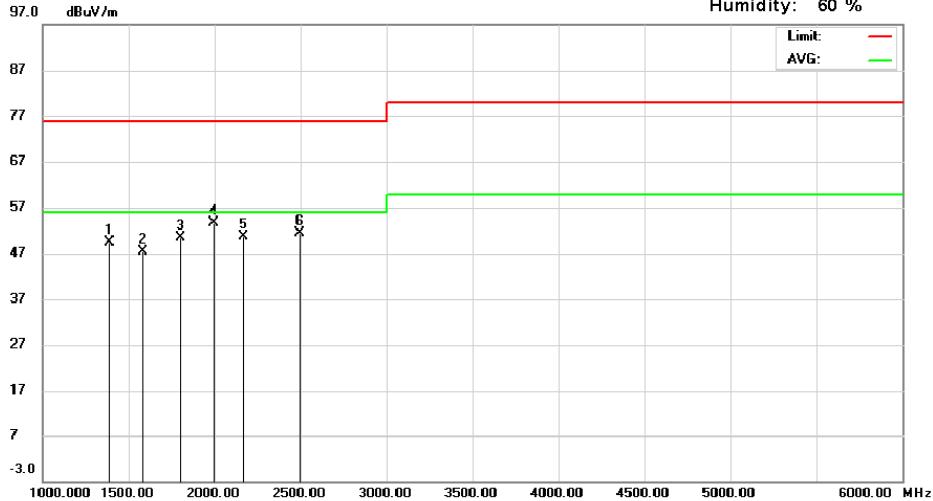

Site : Chamber 01

Condition : CISPR22 ClassA 3M above1GHz Radiation

Polarization: *Horizontal*

Witness:

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1390.000	69.99	-20.60	49.39	76.00	-26.61	110	22	peak
2	1580.000	67.04	-19.72	47.32	76.00	-28.68	125	141	peak
3	1805.000	67.89	-17.55	50.34	76.00	-25.66	188	165	peak
4	1995.000	69.36	-15.71	53.65	76.00	-22.35	100	258	peak
5	2170.000	65.95	-15.32	50.63	76.00	-25.37	100	223	peak
6	2495.000	65.98	-14.67	51.31	76.00	-24.69	120	234	peak

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor


Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Horn Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 4.2.2 Radiated Emissions (Vertical)

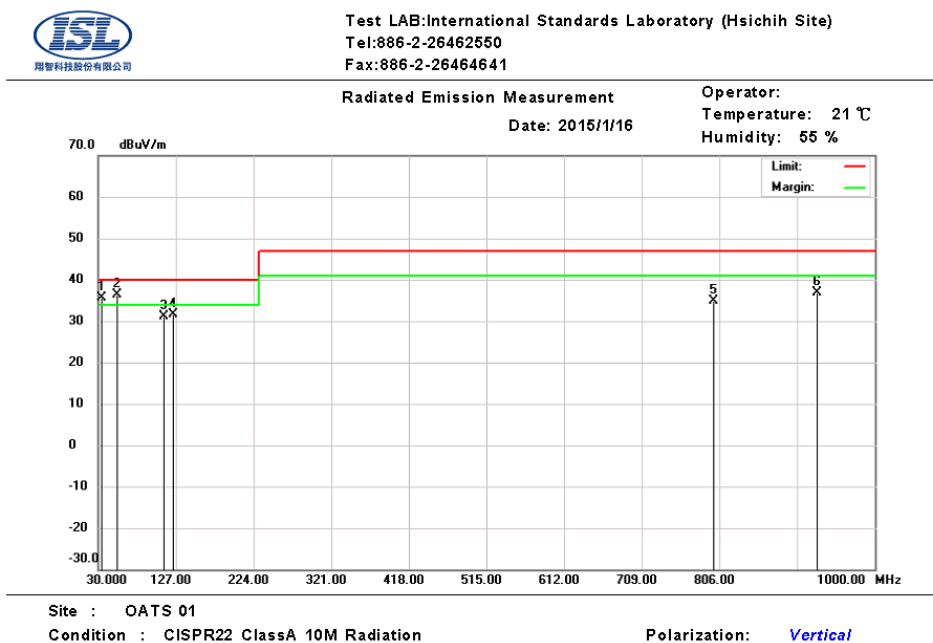

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	34.8500	17.25	18.26	35.51	40.00	-4.49	332	114	QP
2	54.2500	27.88	8.57	36.45	40.00	-3.55	155	294	QP
3	111.4800	16.58	14.56	31.14	40.00	-8.86	100	254	QP
4	124.0900	16.25	15.43	31.68	40.00	-8.32	397	139	QP
5	799.2100	10.05	24.82	34.87	47.00	-12.13	100	143	QP
6	928.2200	10.25	26.62	36.87	47.00	-10.13	263	269	QP

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.



Test LAB: International Standards Laboratory (Hsichih Site)  
Tel: 886-2-26462550  
Fax: 886-2-26464641


**Radiated Emission Measurement**

Date: 2015/1/20

Operator:

Temperature: 26 °C

Humidity: 60 %

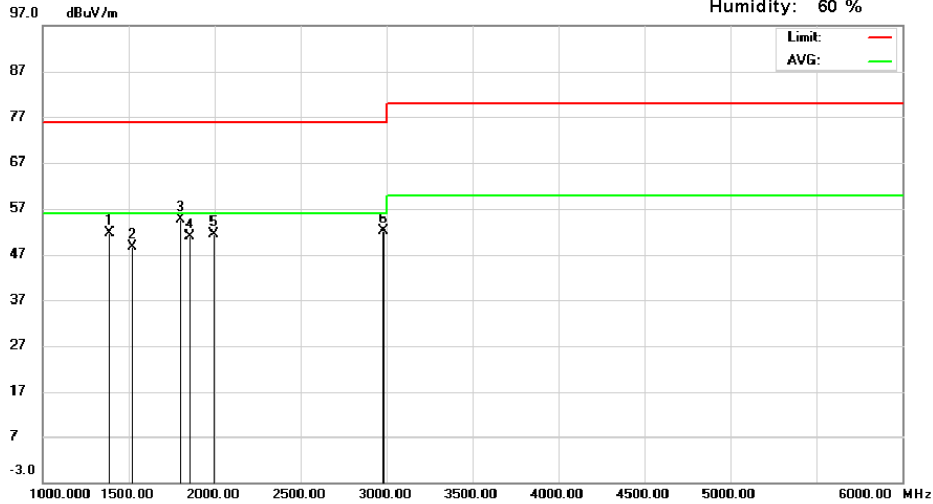

Site : Chamber 01

Condition : CISPR22 ClassA 3M above1GHz Radiation

Polarization: *Vertical*

Witness:

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1390.000	72.34	-20.60	51.74	76.00	-24.26	100	135	peak
2	1520.000	68.97	-20.31	48.66	76.00	-27.34	100	145	peak
3	1805.000	72.18	-17.55	54.63	76.00	-21.37	188	305	peak
4	1855.000	67.88	-17.07	50.81	76.00	-25.19	100	124	peak
5	1995.000	67.00	-15.71	51.29	76.00	-24.71	100	153	peak
6	2985.000	65.93	-13.79	52.14	76.00	-23.86	100	273	peak

\* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Horn Antenna Distance: 3 meters

**Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.**

### 4.3 Test Setup Photo

Front View (30MHz~1GHz)




Back View (30MHz~1GHz)



Front View (above 1GHz)



Back View (above 1GHz)

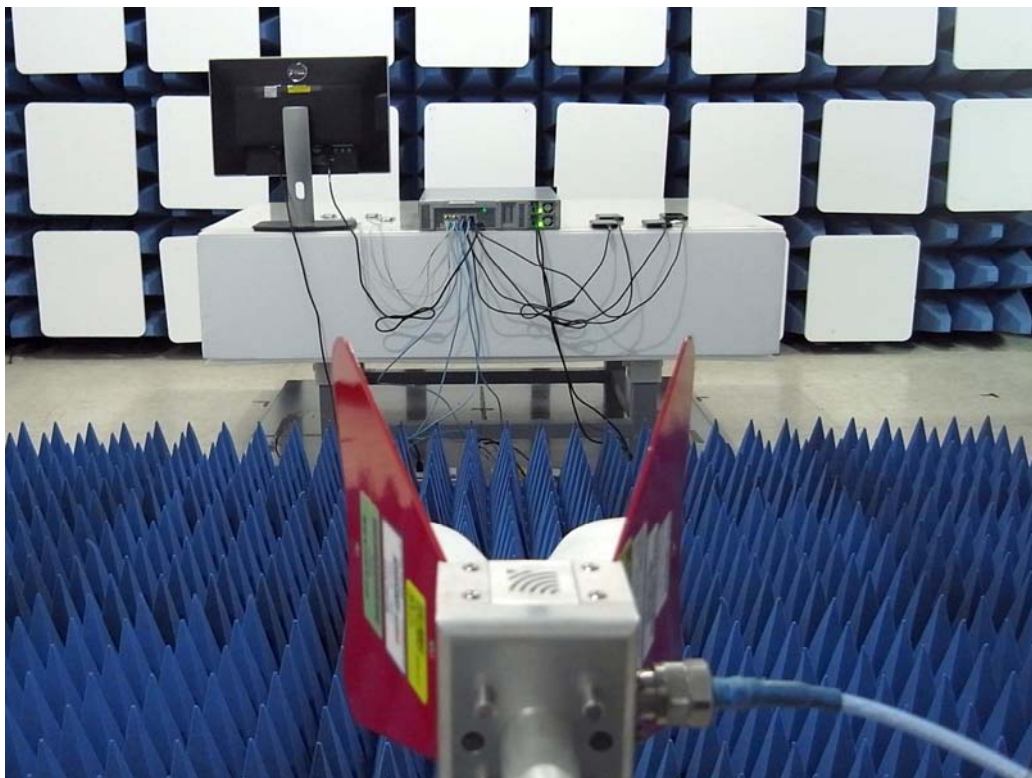



## 5. Electrostatic discharge (ESD) immunity

### 5.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2/ IEC EN61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S7
Temperature:	24 °C
Humidity:	53%

### Selected Test Point


Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.

Contact: Total 200 discharges minimum were to the selected contact points.

Indirect Contact Points: 25 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

### 5.2 Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470K $\Omega$  resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

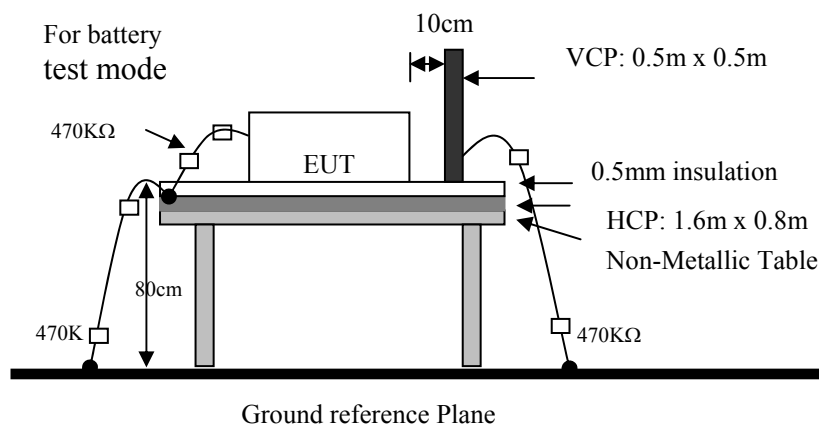

### 5.3 Test Result

**Performance of EUT complies with the given specification.**

## 5.4 Test Point

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.



## 5.5 Test Setup Photo






## 6. Radio-Frequency, Electromagnetic Field immunity

### 6.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3/ IEC EN61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1KHz 80%
Frequency range:	80 MHz~1 GHz
Frequency Step:	1% of last step frequency
Dwell time:	3s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S8
Temperature:	22°C
Humidity:	53%

### 6.2 Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

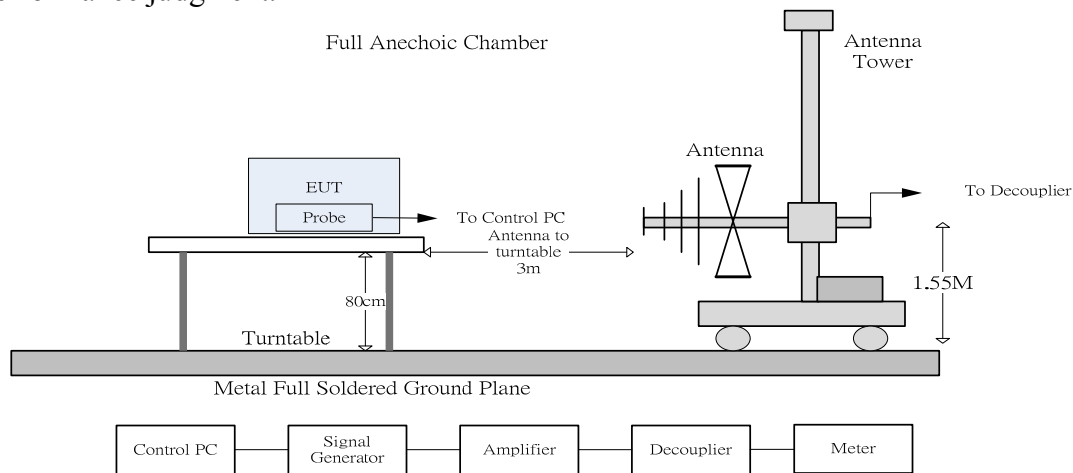

### 6.3 Test Result

**Performance of EUT complies with the given specification.**

#### 6.4 Test Setup Photo



## 7. Electrical Fast transients/burst immunity

### 7.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-4/ IEC EN61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV
Rise Time:	5ns
Hold Time:	50ns
Repetition Frequency:	5KHz
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S9
Temperature:	25 °C
Humidity:	56%

### Test Procedure



The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec
Capacitive coupling clamp	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

## 7.2 Test Setup

EUT is at least 50cm from the conductive structure.

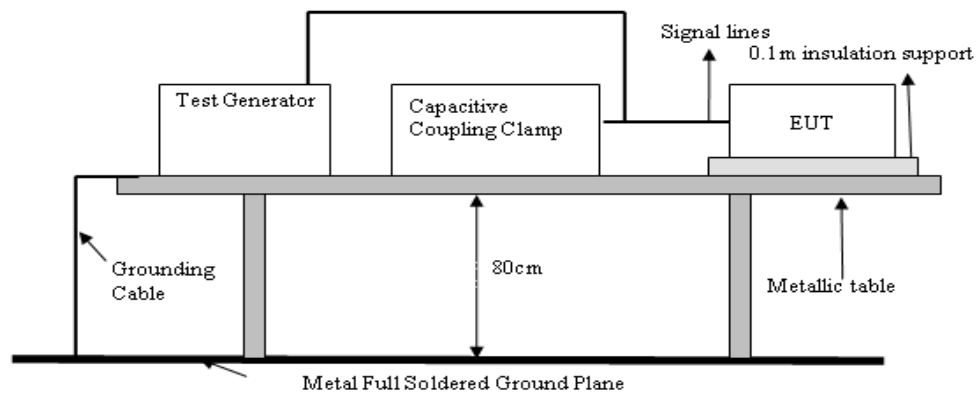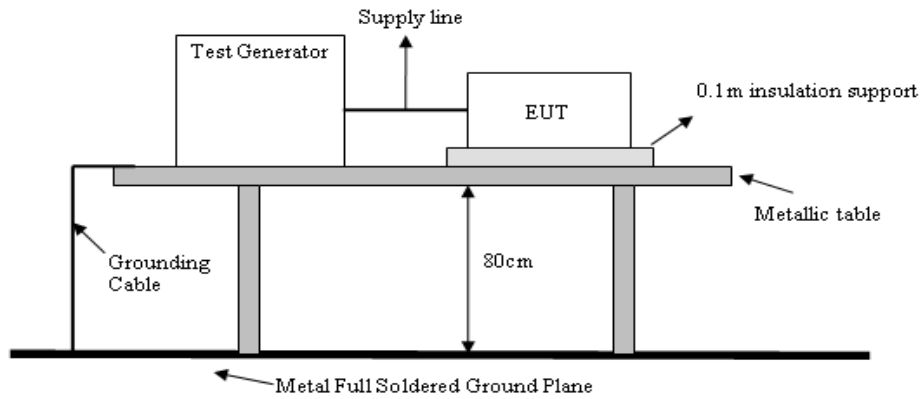

## 7.3 Test Result

Performance of EUT complies with the given specification.

## 7.4 Test Setup Photo




## 8. Surge Immunity

### 8.1 Test Specification

Port:	AC mains	Signal and telecommunication port-NA
Basic Standard:	EN 61000-4-5/ IEC EN61000-4-5 (details referred to Sec 1.2)	
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV	Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 4 kV
Rise Time:	1.2us	10us
Hold Time:	50us	700us
Repetition Rate:	30 seconds	60 seconds
Angle:	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°	NA
Criteria:	B	C
Remarks:		Where the coupling network for the 10/700 us waveform affects the functioning of high speed data ports, the test shall be carried out using a 1.2/50 (8/20) us waveform and appropriate coupling network.
Test Procedure:	refer to ISL QA -T4-E-S10	
Temperature:	25°C	
Humidity:	56%	

### 8.2 Test Setup

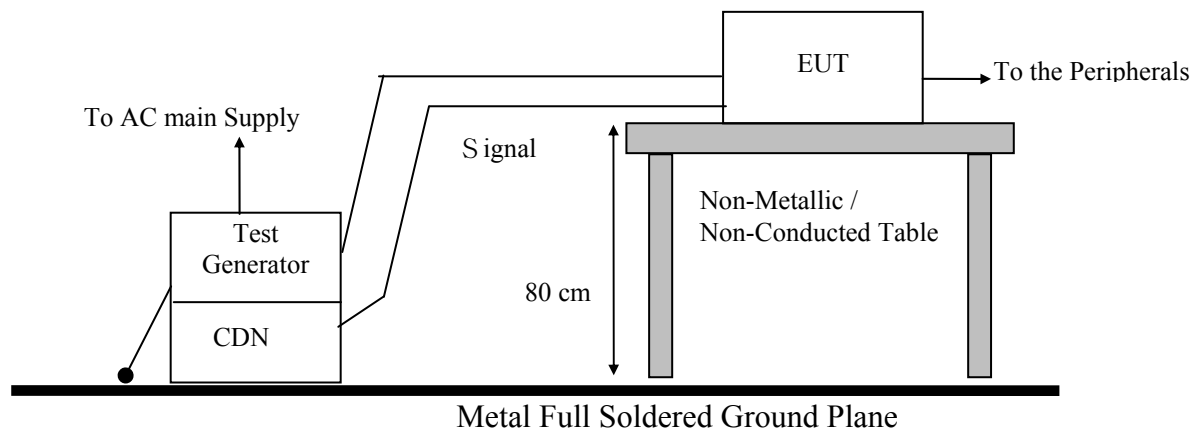

### 8.3 Test Result

Performance of EUT complies with the given specification.

#### 8.4 Test Setup Photo




## 9. Immunity to Conductive Disturbance

### 9.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-6/ IEC EN61000-4-6 (details referred to Sec 1.2)
Test Level:	3 V
Modulation:	AM 1KHz 80%
Frequency range:	0.15 MHz - 80MHz
Frequency Step:	1% of last Frequency
Dwell time:	3s
Criteria:	A
CDN Type:	CDN M2+M3, CDN T2, CDN T4, CDN T8, EM Clamp
Test Procedure	refer to ISL QA -T4-E-S11
Temperature:	24°C
Humidity:	56%

### 9.2 Test Setup

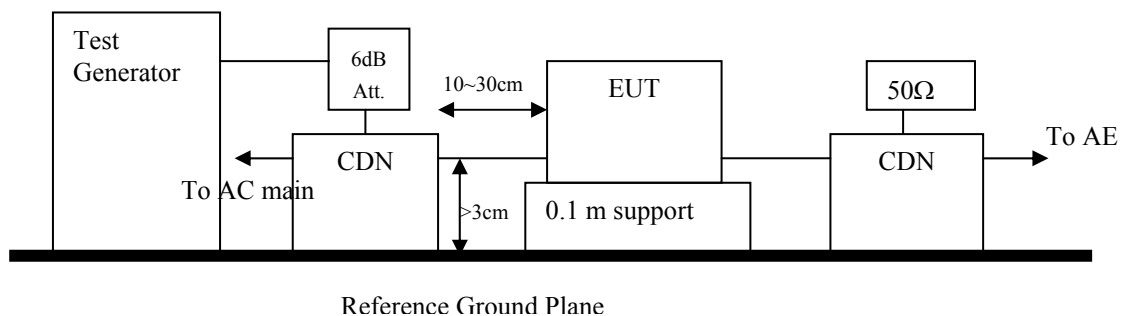

### 9.3 Test Result

Performance of EUT complies with the given specification.



## 9.4 Test Setup Photo




## 10. Power Frequency Magnetic Field immunity

### 10.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8/ IEC EN61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S12
Temperature:	25°C
Humidity:	56%

### 10.2 Test Setup

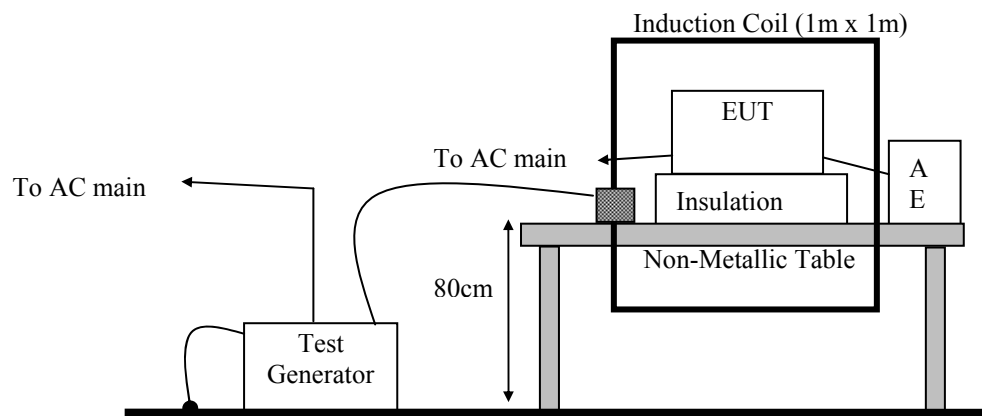

### 10.3 Test Result

Performance of EUT complies with the given specification.

#### 10.4 Test Setup Photo




## 11. Voltage Dips, Short Interruption and Voltage Variation immunity

### 11.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11/ IEC EN61000-4-11 (details referred to Sec 1.2)
Test Level: Criteria:	>95% in 0.5 period B
Test Level: Criteria:	30% in 25 period C
Test Level: Criteria:	>95% in 250 period C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure	refer to ISL QA -T4-E-S13
Temperature:	25°C
Humidity:	56%

### 11.2 Test Setup

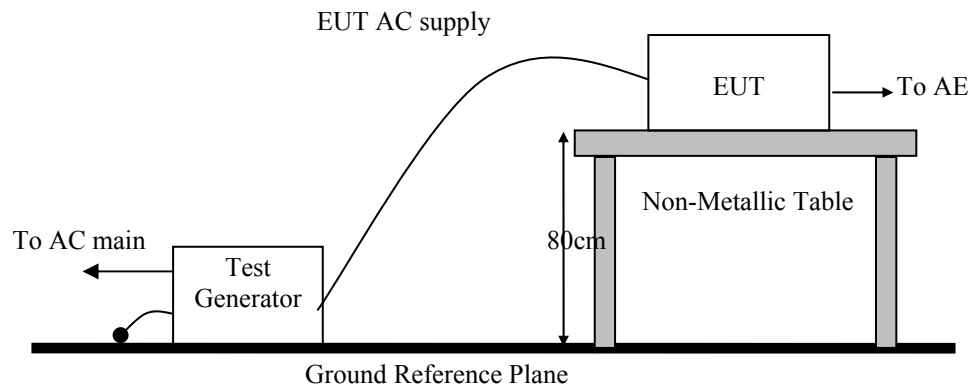

### 11.3 Test Result

**Performance of EUT complies with the given specification.**

#### 11.4 Test Setup Photo



## 12. Harmonics

### 12.1 Test Specification


Port:	AC mains
Active Input Power:	>75W
Basic Standard:	EN61000-3-2/IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	A
Test Procedure	refer to ISL QA -T4-E-S14
Temperature:	19°C
Humidity:	68%

#### Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.


### 12.2 Test Setup

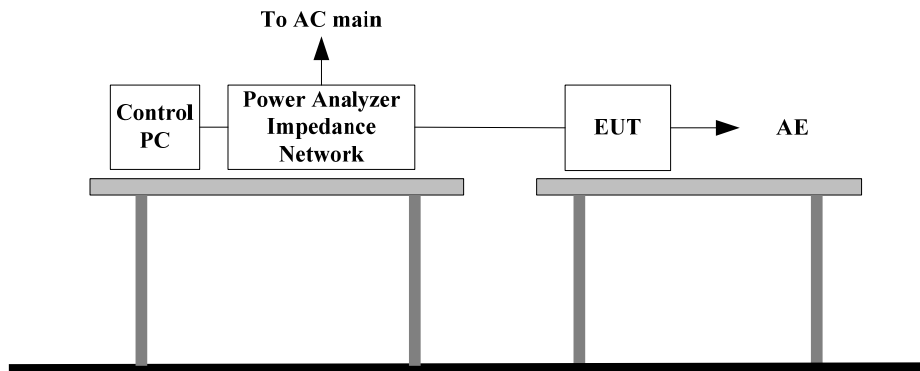

### 12.3 Test Result

**Performance of EUT complies with the given specification.**

## 12.4 Test Data

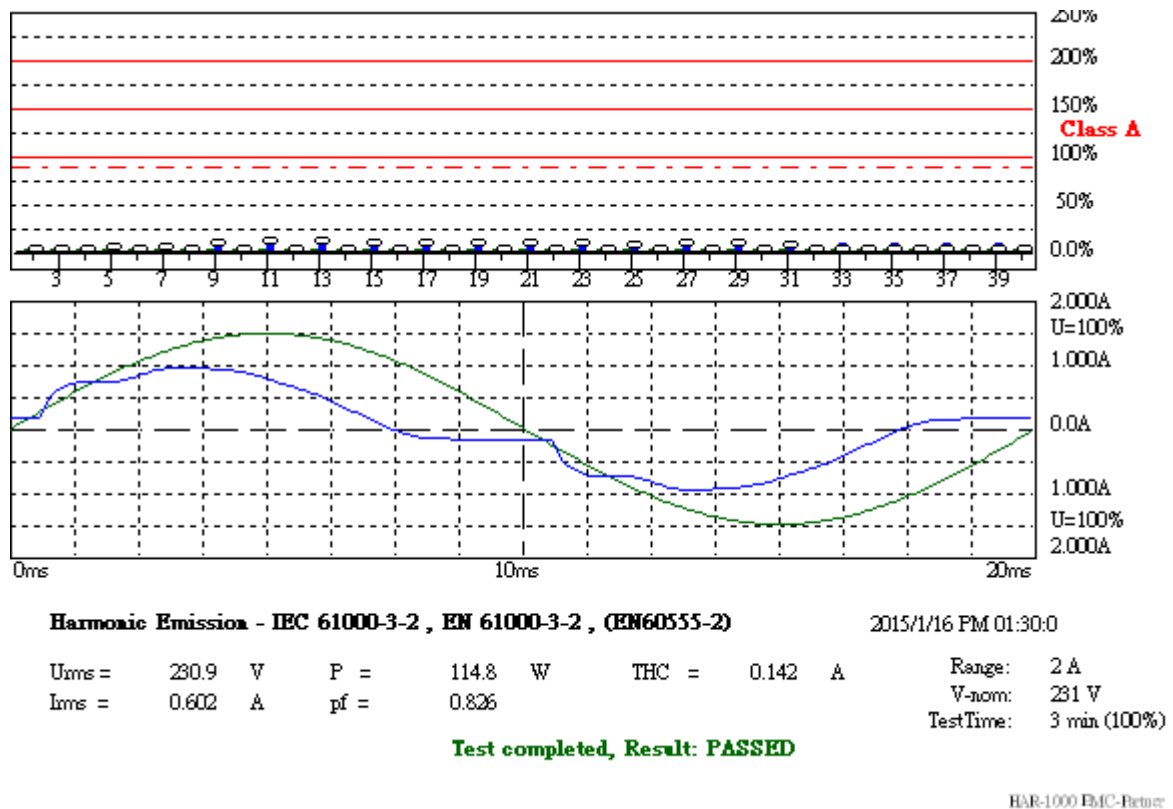

Full Bar : Actual Values  
 Empty Bar : Maximum Values  
 Blue : Current , Green : Voltage , Red : Failed

## Measurement

$U_{rms} = 230.9$  V Freq = 50.000 Range: 2 A  
 $I_{rms} = 0.602$  A  $I_{pk} = 0.968$  A cf = 1.609  
 $P = 114.8$  W S = 138.9VA  $pf = 0.826$   
 $THDi = 24.3$  %  $THDu = 0.10$  % Class A

Test - Time : 3min ( 100 %)

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	I <sub>max</sub> [A]	I <sub>max</sub> %L [%]	Limit [A]	Status
1	50	0.5832		0.5865			
2	100	0.0000	0.0000	0.0013	0.1243	1.0800	
3	150	0.1226	5.3288	0.1243	5.4029	2.3000	
4	200	0.0000	0.0000	0.0010	0.2271	0.4300	
5	250	0.0470	4.1186	0.0481	4.2189	1.1400	
6	300	0.0000	0.0000	0.0007	0.2441	0.3000	
7	350	0.0301	3.9122	0.0386	5.0096	0.7700	
8	400	0.0000	0.0000	0.0010	0.4246	0.2300	
9	450	0.0235	5.8656	0.0239	5.9814	0.4000	
10	500	0.0000	0.0000	0.0007	0.3981	0.1840	
11	550	0.0270	8.1682	0.0313	9.4697	0.3300	
12	600	0.0000	0.0000	0.0007	0.4777	0.1533	
13	650	0.0192	9.1412	0.0212	10.114	0.2100	
14	700	0.0000	0.0000	0.0005	0.3715	0.1314	
15	750	0.0098	6.5340	0.0134	8.9518	0.1500	
16	800	0.0000	0.0000	0.0004	0.3184	0.1150	
17	850	0.0092	6.9304	0.0094	7.1018	0.1324	
18	900	0.0000	0.0000	0.0002	0.2388	0.1022	
19	950	0.0080	6.7155	0.0087	7.3188	0.1184	
20	1000	0.0000	0.0000	0.0004	0.3981	0.0920	
21	1050	0.0065	6.0807	0.0067	6.2663	0.1071	
22	1100	0.0000	0.0000	0.0002	0.2919	0.0836	
23	1150	0.0062	6.3814	0.0065	6.6135	0.0978	
24	1200	0.0000	0.0000	0.0002	0.3184	0.0767	
25	1250	0.0041	4.5430	0.0054	5.9679	0.0900	
26	1300	0.0000	0.0000	0.0004	0.5175	0.0708	
27	1350	0.0054	6.4342	0.0057	6.8848	0.0833	
28	1400	0.0000	0.0000	0.0004	0.5573	0.0657	
29	1450	0.0051	6.5297	0.0055	7.0801	0.0776	
30	1500	0.0000	0.0000	0.0004	0.5971	0.0613	
31	1550	0.0041	5.6393	0.0054	7.4002	0.0726	
32	1600	0.0000	0.0000	0.0004	0.6369	0.0575	
33	1650	0.0004	0.5839	0.0050	7.3405	0.0682	
34	1700	0.0000	0.0000	0.0004	0.6767	0.0541	
35	1750	0.0000	0.0000	0.0045	7.0258	0.0643	
36	1800	0.0000	0.0000	0.0004	0.7165	0.0511	
37	1850	0.0000	0.0000	0.0045	7.4273	0.0608	
38	1900	0.0000	0.0000	0.0004	0.7563	0.0484	
39	1950	0.0000	0.0000	0.0043	7.4056	0.0577	
40	2000	0.0000	0.0000	0.0004	0.7961	0.0460	



## 12.5 Test Setup Photo

Refer to the Setup Photo for Voltage Fluctuations

## 13. Voltage Fluctuations


### 13.1 Test Specification

Port:	AC mains
Basic Standard:	EN61000-3-3/IEC61000-3-3 (details referred to Sec 1.2)
Test Procedure	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min
	For Plt 2 hours
Temperature:	19°C
Humidity:	68%

### Test Procedure

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

### 13.2 Test Setup

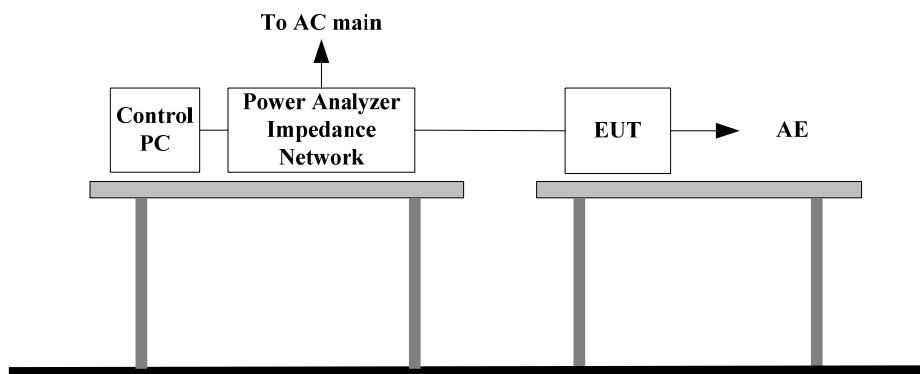


### 13.3 Test Result

Performance of EUT complies with the given specification.

## 13.4 Test Data

Flickermeter 1000-4-15 for 230V/50Hz

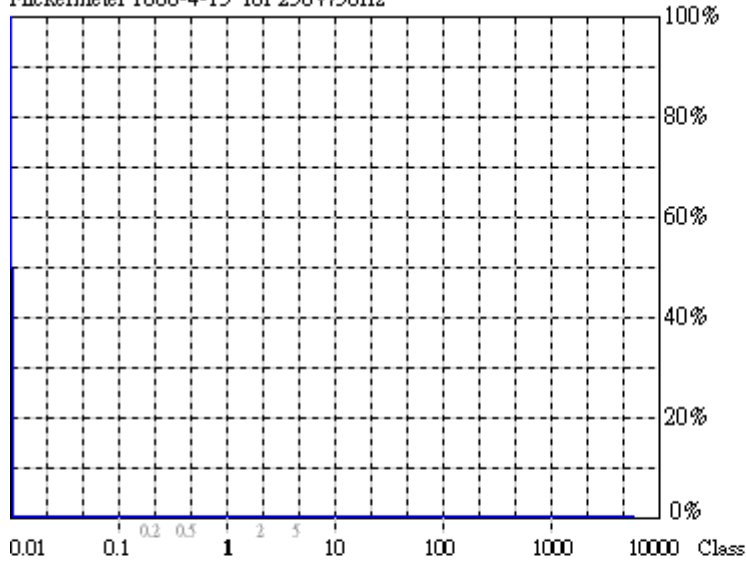

<b>Actual Flicker (Fli):</b>	<b>0.00</b>
<b>Short-term Flicker (Pst):</b>	<b>0.07</b>
Limit (Pst):	1.00
<b>Long-term Flicker (Plt):</b>	<b>0.07</b>
Limit (Plt):	0.65
<b>Maximum Relative Volt. Change (dmax):</b>	<b>0.00%</b>
Limit (dmax):	4.00%
<b>Relative Steady-state Voltage Change (dc):</b>	<b>0.02%</b>
Limit (dc):	3.30%
<b>Maximum Interval exceeding 3.30% (dt):</b>	<b>0.00ms</b>
Limit (dt>Lim):	500ms

**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3**

2015/1/16 PM 03:45:4

U<sub>rms</sub> = 229.7 V P = 88.25 W  
I<sub>rms</sub> = 0.490 A pf = 0.784

Range: 2 A  
V<sub>nom</sub>: 230 V  
TestTime: 120 min (10000%)

**Test completed, Result: PASSED**

HAR-1000 EMC-Retour

### 13.5 Test Setup Photo



## 14. Appendix

### 14.1 Appendix A: Test Equipment

#### 14.1.1 Test Equipment List

Location CON01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C1	HUBER SUHNER	RG214U	389942	11/13/2014	11/13/2015
Conduction	LISN 21	ROHDE & SCHWARZ	ENV216	101476	05/26/2014	05/26/2015
Conduction	LISN 22	ROHDE & SCHWARZ	ENV216	101478	05/26/2014	05/26/2015
Conduction	ISN T2 03	FCC	FCC-TLISN-T 2-02	20618	08/15/2014	08/15/2015
Conduction	ISN T4 05	FCC	FCC-TLISN-T 4-02	20619	08/15/2014	08/15/2015
Conduction	ISN T8 08	Teseq GmbH	ISN T800	36155	01/28/2014	01/28/2015
Conduction	ISN T8 06 (Shielding)	Teseq GmbH	ISN ST08	33999	08/15/2014	08/15/2015
Conduction	EMI Receiver 15	ROHDE & SCHWARZ	ESCI	101166	05/06/2014	05/06/2015

Location OATS01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation	BILOG Antenna 10	Sumol Sciences	JB1	A013004-1	07/09/2014	07/09/2015
Radiation	Coaxial Cable 3F-10M	EMCI	CFD400-NL	ISL-R001	03/14/2014	03/14/2015
Radiation	EMI Receiver 13	ROHDE & SCHWARZ	ESCI	101015	04/11/2014	04/11/2015

Location Chamber 01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. above 1Ghz	Horn Antenna 11	ETS-LINDGR EN	3117	00114397	03/21/2014	03/21/2015
Rad. above 1Ghz	Horn Antenna 03	COM-Power	AH-826	08010	04/01/2013	04/01/2015
Rad. above 1Ghz	Horn Antenna 05	Com-Power	AH-640	100A	01/09/2015	01/09/2016
Rad. above 1Ghz	Microwave Cable-16	HUBER SUHNER	SUCFLEX 104	345761/4	01/06/2015	01/06/2016
Rad. above 1Ghz	Preamplifier 20	EMCI	EMC051845	980084	11/25/2014	11/25/2015
Rad. above 1Ghz	Microwave Cable-19	HUBER SUHNER	SUCFLEX 102	MY 2151/2	05/22/2014	05/22/2015
Rad. above 1Ghz	Preamplifier 22	EMCI	EMC184045	980124	04/09/2014	04/09/2015
Rad. above 1Ghz	Spectrum Analyzer 23	ROHDE & SCHWARZ	FSU43	101255	11/07/2014	11/07/2015

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-3-2/3	DC Burn-In Load 02	D-RAM	DBS-2100	2100-910027	N/A	N/A
EN61K-3-2/3	Harmonic/Flicker Test System 03	EMC Partner	HARMONICS-1000	178	03/21/2014	03/21/2015
EN61K-4-,4,5,8,11	TRANSIENT 2000 01	EMC Partner	TRANSIENT-2000	950	05/08/2014	05/08/2015
EN61K-4-2	ESD GUN 11	TESEQ	NSG 438	1278	09/18/2014	09/18/2015
EN61K-4-3	BILOG Antenna 06	Schaffner	CBL6112B	2754	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~3.0GHz 60W	AR	60S1G3	312762	N/A	N/A
EN61K-4-3	Broadband coupler 10K~220Mhz	Amplifier Research	DC2500	19810	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180	20364	N/A	N/A
EN61K-4-3	Broadband Coupler 1~4GHz	Werlatone	C5291	6516	N/A	N/A
EN61K-4-3	Coaxial Cable Chmb 04-3M-2	Belden	RG-8/U	Chmb 04-3M-2	N/A	N/A
EN61K-4-3	Signal Generator 09	ROHDE&SCHWARZ	SMB100A	106542	07/09/2014	07/09/2015
EN61K-4-4	Digital Oscilloscope	Tektronix	TDS 684A	B010761	N/A	N/A
EN61K-4-4	EFT Clamp	Precision	1604242	CNEFT1000-103	N/A	N/A
EN61K-4-5	CDN-UTP8 01	EMC Partner	CDN-UTP8	032	04/11/2014	04/11/2015
EN61K-4-5	SURGE-TESTER 01	EMC Partner	MIG0603IN3	778	04/09/2014	04/09/2015
EN61K-4-6	Conducted Immunity Test System 03	Frankonia	CIT-10/75	126B1151	11/10/2014	11/10/2015
EN61K-4-6	Attenuator 6dB	EPX	ECA80-6-1-NM-NF	10022601	N/A	N/A
EN61K-4-6	CDN M2+M3	Frankonia	M2+M3	A3011016	08/13/2014	08/13/2015
EN61K-4-6	CDN T2 01	Frankonia	T2	A3010003	08/13/2014	08/13/2015
EN61K-4-6	CDN T4 05	FCC Inc.	FCC-801-T4-RJ45	08020	09/16/2014	09/16/2015
EN61K-4-6	CDN T8 01	FCC Inc.	FCC-801-T8-RJ45	08021	09/16/2014	09/16/2015
EN61K-4-6	CDN RJ45/S 01	Frankonia	CDN-RJ45/S	A3150047	10/28/2014	10/28/2015
EN61K-4-6	EM-Clamp 01	FCC	F-2031-23MM	539	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-1	Harbour Industries	M17/128-RG400	4-6 01-1	N/A	N/A
CISPR 13, Antenna	Signal Generator 02	HP	8648B	3642U01040	09/17/2014	09/17/2015
EN61K-4-8	Magnetic Field Antenna	Precision	TRAIZ44B	MF1000-23	N/A	N/A

PS: N/A => The equipment does not need calibration.

#### 14.1.2 Software for Controlling Spectrum/Receiver and Calculating Test Data

Test Item	Filename	Version
EN61000-3-2	EMC Partner	4.20
EN61000-3-3	EMC Partner	4.20
EN61000-4-2	N/A	
EN61000-4-3	i2	4.130102g
EN61000-4-4	EMC Partner	1.79
EN61000-4-5	EMC Partner	1.82
EN61000-4-6	EMC Partner	1.12
EN61000-4-8	EMC Partner	1.79
EN61000-4-11	EMC Partner	1.79

Site	Filename	Version	Issue Date
Conduction/Radiation	EZ EMC	ISL-03A2	3/6/2013

## 14.2 Appendix B: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2011. The coverage factor  $k = 2$  yields approximately a 95 % level of confidence.

### <Conduction 01>

AMN:  $\pm 3.28\text{dB}$   
 ISN T2:  $\pm 3.50\text{dB}$   
 ISN T4:  $\pm 3.51\text{dB}$   
 ISN T8:  $\pm 3.51\text{dB}$

### <OATS 01 (10M)>

Horizontal  
 30MHz~200MHz:  $\pm 3.38\text{dB}$   
 200MHz~1000MHz:  $\pm 4.25\text{dB}$   
 Vertical  
 30MHz~200MHz:  $\pm 4.15\text{dB}$   
 200MHz~1000MHz:  $\pm 4.26\text{dB}$

### <Chamber 01 (3M)>

1GHz~6GHz:  $\pm 4.88\text{dB}$   
 6GHz~18GHz:  $\pm 5.15\text{dB}$   
 18GHz~26.5GHz:  $\pm 4.34\text{dB}$   
 18GHz~26.5GHz:  $\pm 4.38\text{dB}$

### <Immunity 01>

Test item	Uncertainty	Test item	Uncertainty
EN61000-4-2 (ESD)		EN61000-4-5 (Surge)	
Rise time $t_r$	$\leq 15\%$	Time	$\pm 3.7\%$
Peak current $I_p$	$\leq 6.3\%$	Voltage	$\pm 3.9\%$
Current at 30 ns	$\leq 6.3\%$	Current	$\pm 2.5\%$
Current at 60 ns	$\leq 6.3\%$	EN61000-4-6 (CS)	
EN61000-4-3 (RS)	$\pm 2.19\text{dB}$	CDN	$\pm 1.36\text{dB}$
EN61000-4-4 (EFT)		EM Clamp	$\pm 3.19\text{dB}$
Voltage rise time (tr)	$\pm 6.2\%$	EN61000-4-8 (Magnetic)	$\pm 4.0\%$
Peak voltage value(VP)	$\pm 8.6\%$	EN61000-4-11 (Dips)	
Voltage pulse width (tw)	$\pm 5.9\%$	Time	$\pm 2.0\%$
		Voltage	$\pm 1.7\%$
		Current	$\pm 1.3\%$

Test item	Uncertainty	Test item	Uncertainty
EN61000-3-2 (Harmonics)	$\pm 3.98\%$	EN61000-3-3 (Fluctuations and Flicker)	$\pm 3.98\%$



### 14.3 Appendix C: Photographs of EUT

Please refer to the File of **ISL-13LE459P-R3**