

Certificate

Issue Date: August 7, 2012
Ref. Report No. ISL-12HE227CE

Product Name : Video Server
Model(s) : GV-VS14
Brand Name : Geo Vision
Responsible Party : GeoVision Inc
Address : 9F., No. 246, Sec. 1, Neihu Rd., Neihu District, Taipei City 114, Taiwan

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :



Standards:

EN 55022: 2010 and CISPR 22: 2008 (modified)
EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009
EN 61000-3-3: 2008 and IEC 61000-3-3: 2008
EN 55024: 2010 and CISPR 24: 2010
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and
IEC 61000-4-3:2006+A1: 2007+A2: 2010
EN 61000-4-4: 2004 +A1:2010 and IEC 61000-4-4: 2004 +A1:2010
EN 61000-4-5: 2006 and IEC 61000-4-5: 2005
EN 61000-4-6: 2009 and IEC 61000-4-6: 2008
EN 61000-4-8: 2010 and IEC 61000-4-8: 2009
EN 61000-4-11: 2004 and IEC 61000-4-11: 2004

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu / Director

Hsi-Chih LAB:

No. 65, Gu Dai Keng St., Hsichih District,
New Taipei City 22179, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



CE MARK TECHNICAL FILE

AS/NZS EMC CONSTRUCTION FILE

of

Product Name

Video Server

Model

GV-VS14

Brand Name

Geo Vision

Contains:

1. Declaration of Conformity
2. EN55022/CISPR 22, AS/NZS CISPR 22 EMI test report
3. EN55024/CISPR 24, EN61000-3-2 / IEC 61000-3-2, and EN61000-3-3 / IEC 61000-3-3 test report
4. Block Diagram and Schematics
5. Users' manual

Declaration of Conformity

Name of Responsible Party: GeoVision Inc
 Address of Responsible Party: 9F., No. 246, Sec. 1, Neihu Rd., Neihu District, Taipei City 114, Taiwan
 Declares that product: Video Server
 Model: GV-VS14
 Brand Name: Geo Vision
 Assembled by: Same as above
 Address: Same as above

Conforms to the EMC Directive 2004/108/EC as attested by conformity with the following harmonized standards:

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

<to be continued>

We, GeoVision Inc, hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.

GeoVision Inc

Date: August 7, 2012

Declaration of Conformity

Name of Responsible Party: GeoVision Inc
 Address of Responsible Party: 9F., No. 246, Sec. 1, Neihu Rd., Neihu District, Taipei City 114, Taiwan
 Declares that product: Video Server
 Model: GV-VS14
 Brand Name: Geo Vision
 Assembled by: Same as above
 Address: Same as above

Conforms to the C-Tick Mark requirement as attested by conformity with the following standards:

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

<to be continued>

We, GeoVision Inc, hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.

GeoVision Inc

Date: August 7, 2012

CE TEST REPORT

of
EN55022 / CISPR 22 / AS/NZS CISPR 22
Class A
EN55024 / CISPR 24 / IMMUNITY
EN61000-3-2 / EN61000-3-3

Product : **Video Server**

Model(s): **GV-VS14**

Brand Name: **GeoVision**

Applicant: **GeoVision Inc**

Address: **9F., No. 246, Sec. 1, Neihu Rd., Neihu District,
Taipei City 114, Taiwan**

Test Performed by:

International Standards Laboratory

<Hsi-Chih LAB>

*Site Registration No.

BSMI:SL2-IN-E-0037; SL2-R1/R2-E-0037; TAF: 1178

FCC: TW1067; IC: IC4067A-1; NEMKO: ELA 113A

VCCI: <Conduction01>C-354, T-1749, <OATS01>R-341,

<Chamber01>G-443

*Address:

No. 65, Gu Dai Keng St.

Hsichih District, New Taipei City 22179, Taiwan

*Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Report No.: **ISL-12HE227CE**

Issue Date : **August 7, 2012**

This report totally contains 54 pages including this cover page and contents page.

Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data	1
1.2	Test Standards	2
1.3	Description of EUT	3
1.4	Description of Support Equipment	4
1.5	Software for Controlling Support Unit.....	5
1.6	I/O Cable Condition of EUT and Support Units	6
2.	Power Main Port Conducted Emissions	7
2.1	Test Setup and Procedure	7
2.2	Conduction Test Data: Configuration 1	8
2.3	Test Setup Photo.....	10
3.	Telecommunication Port Conducted Emissions	12
3.1	Test Setup and Procedure	12
3.2	Test Data: LAN--10M	13
3.3	Test Data: LAN--100M	14
3.4	Test Data: LAN--GIGA (Voltage)	15
3.5	Test Setup Photo.....	16
4.	Radiated Disturbance Emissions	17
4.1	Test Setup and Procedure	17
4.2	Radiation Test Data: Configuration 1.....	19
4.3	Test Setup Photo.....	23
5.	Electrostatic discharge (ESD) immunity	25
5.1	Test Specification	25
5.2	Test Setup	25
5.3	Test Result	25
5.4	Test Point.....	26
5.5	Test Setup Photo.....	27
6.	Radio-Frequency, Electromagnetic Field immunity.....	28
6.1	Test Specification	28
6.2	Test Setup	28
6.3	Test Result	28
6.4	Test Setup Photo.....	29
7.	Electrical Fast transients/burst immunity	30
7.1	Test Specification	30
7.2	Test Setup	31
7.3	Test Result	31
7.4	Test Setup Photo.....	32
8.	Surge Immunity	33
8.1	Test Specification	33
8.2	Test Setup	33
8.3	Test Result	33
8.4	Test Setup Photo.....	34
9.	Immunity to Conductive Disturbance.....	35
9.1	Test Specification	35
9.2	Test Setup	35
9.3	Test Result	35
9.4	Test Setup Photo.....	36

10.	Power Frequency Magnetic Field immunity	37
10.1	Test Specification.....	37
10.2	Test Setup.....	37
10.3	Test Result.....	37
10.4	Test Setup Photo	38
11.	Voltage Dips, Short Interruption and Voltage Variation immunity	39
11.1	Test Specification.....	39
11.2	Test Setup.....	39
11.3	Test Result.....	39
11.4	Test Setup Photo	40
12.	Harmonics	41
12.1	Test Specification.....	41
12.2	Test Setup.....	41
12.3	Test Result.....	41
12.4	Test Setup Photo	42
13.	Voltage Fluctuations	43
13.1	Test Specification.....	43
13.2	Test Setup.....	43
13.3	Test Result.....	43
13.4	Test Setup Photo	45
14.	Appendix.....	46
14.1	Appendix A: Test Equipment.....	46
14.2	Appendix B: Uncertainty of Measurement	49
14.3	Appendix C: Photographs of EUT Please refer to the File of ISL-12HE227P.....	51

1. General

1.1 Certification of Accuracy of Test Data

Standards: Please refer to 1.2

Equipment Tested: Video Server

Model: GV-VS14

Brand Name: GeoVision

Applicant: GeoVision Inc

Sample received Date: July 26, 2012

Final test Date: EMI:refer to the date of test data
EMS: August 3, 2012

Test Site: International Standards Laboratory
OATS 01; Chamber 14; Conduction 01; Immunity01

Test Distance: 10M; 3M (above1GHz) (EMI test)


Temperature: refer to each site test data


Humidity: refer to each site test data

Input power: Conduction input power: AC 230 V / 50 Hz
Radiation input power: AC 230 V / 50 Hz
Immunity input power: AC 230 V / 50 Hz

Test Result: **PASS**

Report Engineer: Maggy Han

Test Engineer: 
Louis Yu

Approved By: 
Jim Chu / Director

1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the following

EN 55022:2010, CISPR 22:2008 (modified) and AS/NZS CISPR 22: 2009: Class A: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment.

EN 55024:2010 and CISPR 24:2010: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4: 2004 +A1:2010 IEC 61000-4-4: 2004 +A1:2010	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5: 2006 IEC 61000-4-5: 2005	Surge	Pass	B
EN 61000-4-6:2009 IEC 61000-4-6:2008	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11: 2004 IEC 61000-4-11: 2004	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2: 2006 +A1:2009 +A2:2009 IEC 61000-3-2: 2005 +A1:2008 +A2:2009	Limits for harmonics current emissions	Pass
EN 61000-3-3: 2008 IEC 61000-3-3: 2008	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

1.3 Description of EUT

EUT

Product Name	Video Server
Condition	Pre-Production
Model Number(s)	GV-VS14
Serial Number	N/A
Power Supply	DVE(Model: DSA-42D-12 1 120350) AC input: 100-240V ~ 50/60Hz 1.2A DC output: 12V, 3.5A
Motherboard	Model: GV-VS14 V1.00
USB 2.0 Port	two 4-pins
I/O Terminal Port	one 16-pins
RJ45 Port(PoE)	one 8-pins (10/100/1000M bps)
BNC-In Port	four
Audio Out Port	one
Audio In Port	two
1 TO 2 Audio Data Cable	two, Non-shielded, Detachable
DC-In Port	one
DC-Out Port	one
1 TO 4 DC Power Cable	one, Shielded, Detachable
Maximum Operating Frequency	810MHz

All types of EUT have been tested. We present the worst case test data (Configurations: 1) in the report. The test configurations are listed below:

Configurations

Configurations	Power Supply
1	DVE(Model: DSA-42D-12 1 120350)
2	RJ45 Port(PoE)

EMI Noise Source

Motherboard Crystal	25MHz (X1), 12MHz (Y1), 32.768KHz (Y4), 54MHz (OSC2)
---------------------	---

EMI Solution

Added one core on the Power supply cable
--

1.4 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
USB2.0 External HDD Enclosure*2	RD1000 S/N: NA	DELL	Non-shielded, Detachable	FCC DOC
Decoder	AD-300 S/N: AD30000021115-0400	Britz	Non-shielded, Detachable	FCC DOC
Radio Cassette Player	RQ-L11	Panasonic	Non-shielded, Detachable	FCC DOC
DVD Player	DVD-NS575P	SONY	Non-shielded, Un-detachable	FCC DOC
Notebook Personal Computer	Latitude D400 S/N: N/A	DELL	Non-shielded, Detachable	FCC DOC
1 to 4 BNC Adapter	N/A	N/A	N/A	N/A
Ethernet PoE Switch	FSD-804PS S/N:A310126000161	PLANET	Non-shielded, Detachable	FCC DOC

1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Receive and transmit package of EUT to the Ethernet PoE Switch HUB through RJ45 port.
- B. Used Tfggen.exe or ping.exe to send signal to EUT RJ45 port through Notebook RJ45 Port.
- C. Used iexplore.exe or Remote Viewlog.exe to R/W USB2.0 External HDD Enclosure through EUT USB2.0 Port.
- D. Send Video signal from DVD Player to EUT through 1 to 4 BNC Adapter
- E. Send audio signal to the Decoder.
- F. Receive audio signal from Radio Cassette Player through EUT Audio In port.
- G. Receive audio signal from DVD Player through EUT Audio In port.
- H. Repeat the above steps.

	Filename	Issued Date
RJ45	Ping.exe	05/05/1999
RJ45	Tfggen.exe	06/23/1999
USB2.0 External HDD Enclosure	iexplore.exe	04/30/2012
USB2.0 External HDD Enclosure	Remote Viewlog.exe	01/16/2012


1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to EUT SPS	1.8M	Non-shielded, Detachable	Plastic Head
BNC Data Cable *4	EUT BNC Port to 1 to 4 BNC Adapter	1M	Shielded, Detachable	Metal Head
AV Data Cable	DVD Player AV Port to 1 to 4 BNC Adapter	1.5M	Non-shielded, Detachable	Metal Head
Audio Data Cable	EUT Audio Out Port to Decoder	1.5M	Non-shielded, Detachable	Metal Head
Audio Data Cable	EUT Audio In Port to DVD Player Audio Port	1.5M	Non-shielded, Detachable	Metal Head
Audio Data Cable	EUT Audio-In Port to Radio Cassette Player	1.5M	Non-shielded, Detachable	Metal Head
USB2.0 Data Cable*2	USB2.0 External HDD Enclosure USB2.0 Port to EUT USB2.0 Port	2M	Shielded, Detachable (With Core)	Metal Head
RJ45 Data Cable	EUT RJ-45 Port to PoE Switch HUB RJ45 Port	10M	Non-shielded, Detachable	RJ-45, with Plastic Head
RJ45 Data Cable	Notebook RJ45 Port to PoE Switch HUB RJ45 Port	1.5M	Non-shielded, Detachable	RJ-45, with Plastic Head
DC Power Cable	EUT DC-Out Port to dummy	0.24M	Shielded, Detachable	Metal Head

2. Power Main Port Conducted Emissions

2.1 Test Setup and Procedure

2.1.1 Test Setup

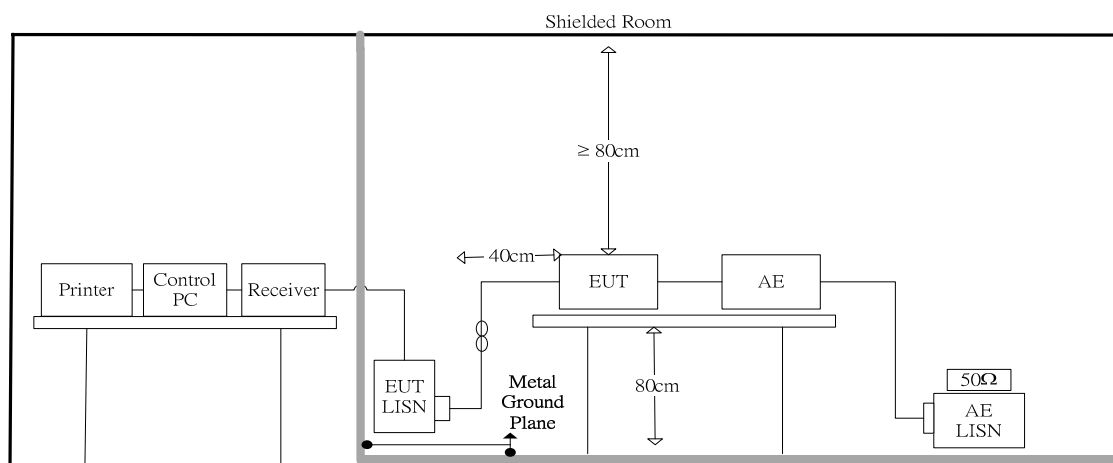

2.1.2 Test Procedure

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, were measured.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

2.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

2.2 Conduction Test Data: Configuration 1

Table 2.2.1 Power Line Conducted Emissions (Hot)

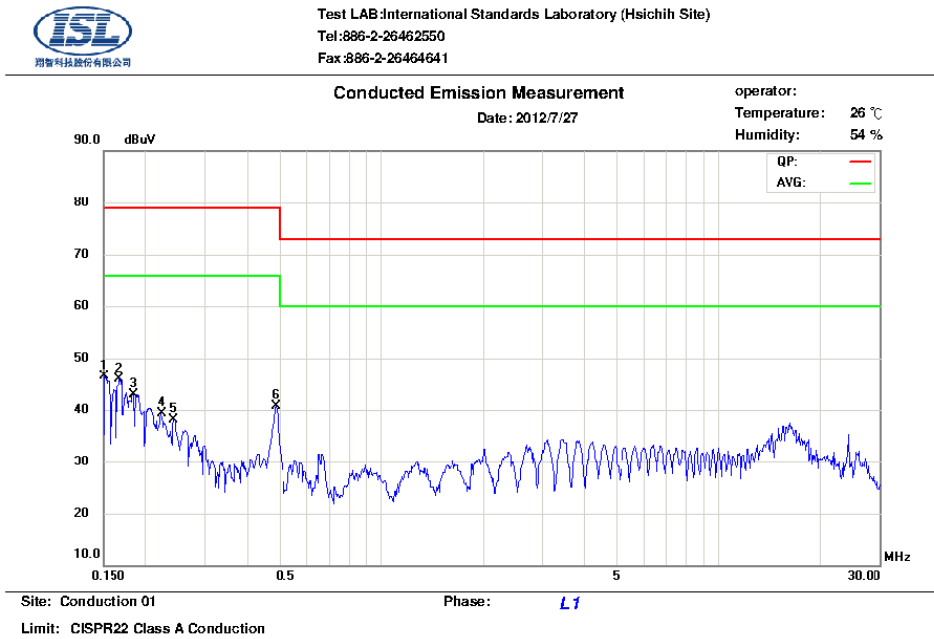

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1507	0.29	0.01	43.75	79.00	-35.25	29.89	66.00	-36.11	
2	0.1678	0.29	0.01	42.57	79.00	-36.43	29.40	66.00	-36.60	
3	0.1832	0.28	0.01	33.78	79.00	-45.22	26.52	66.00	-39.48	
4	0.2217	0.28	0.01	34.74	79.00	-44.26	22.72	66.00	-43.28	
5	0.2420	0.28	0.02	34.33	79.00	-44.67	23.65	66.00	-42.35	
6	0.4853	0.29	0.04	39.43	79.00	-39.57	37.61	66.00	-28.39	

Note:

Margin = Corrected Amplitude - Limit


Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

Table 2.2.2 Power Line Conducted Emissions (Neutral)

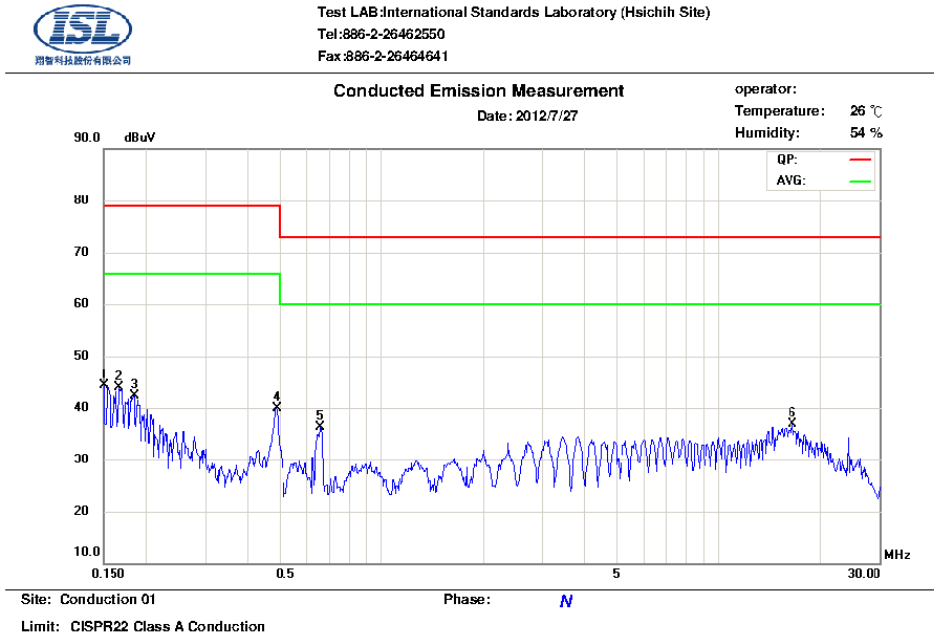

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.1500	0.13	0.01	42.78	79.00	-36.22	31.49	66.00	-34.51	
2	0.1675	0.13	0.01	40.30	79.00	-38.70	29.82	66.00	-36.18	
3	0.1843	0.13	0.01	37.38	79.00	-41.62	29.40	66.00	-36.60	
4	0.4853	0.14	0.04	38.74	79.00	-40.26	37.14	66.00	-28.86	
5	0.6620	0.14	0.05	30.38	73.00	-42.62	13.30	60.00	-46.70	
6	16.4250	0.80	0.25	29.85	73.00	-43.15	24.17	60.00	-35.83	

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.


If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.3 Test Setup Photo

Front View




Back View

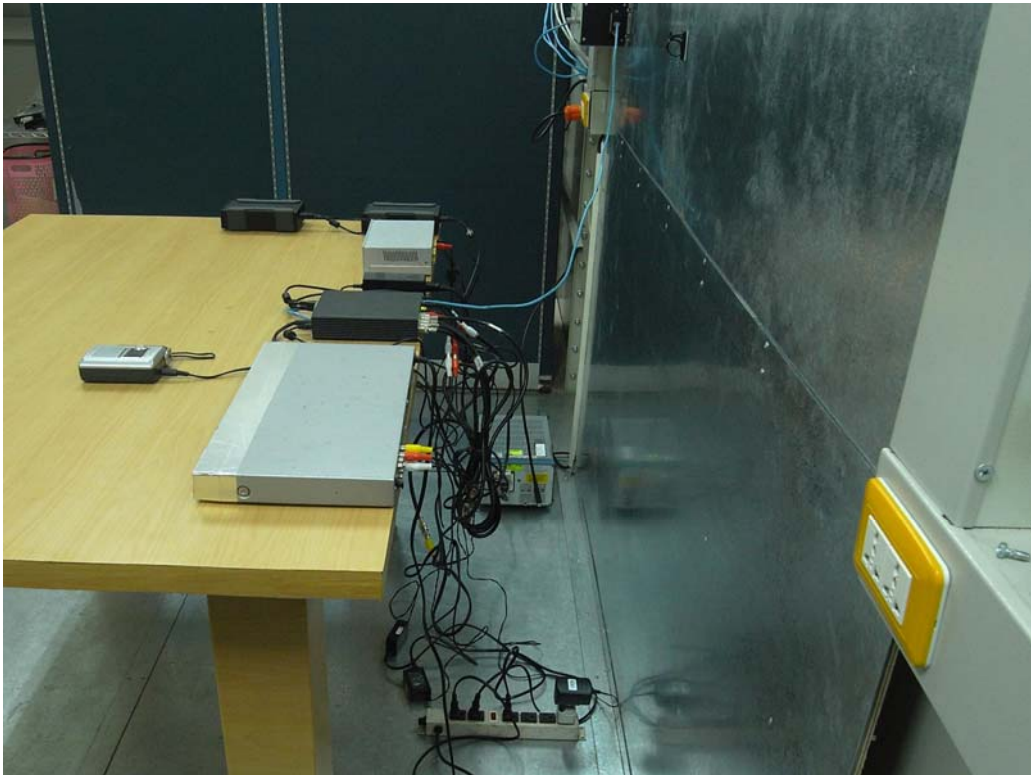

3. Telecommunication Port Conducted Emissions

3.1 Test Setup and Procedure

3.1.1 Test Setup

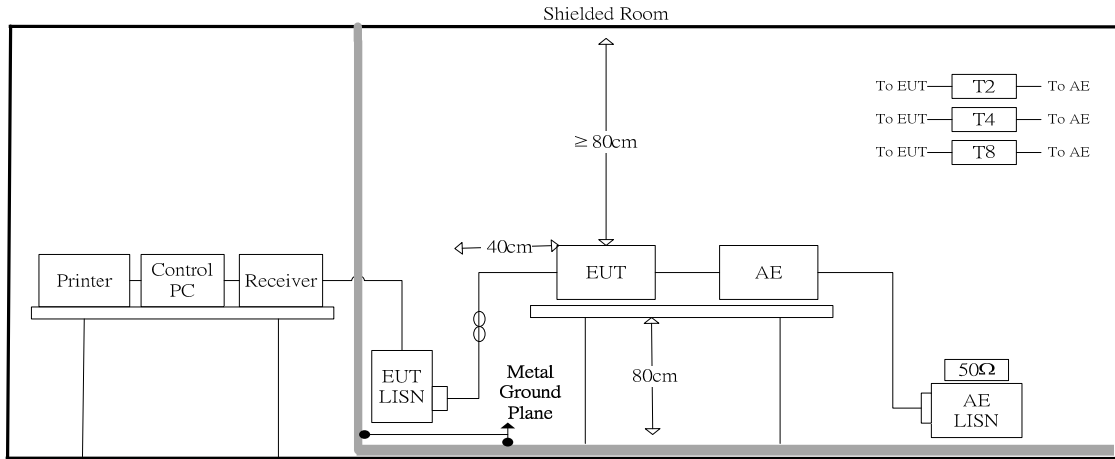

3.1.2 Test Procedure

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

The EUT, any support equipment, and any interconnecting cables were arranged and moved to get the maximum measurement.

Power to the EUT was provided through the LISN which has the Impedance (50 Ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISN was filtered to eliminate ambient signal interference and this filter was bonded to ground. Peripheral equipment to provide a functional system (support equipment) for EUT testing was powered through a ganged, metal power outlet box bonded to the ground. AC input power for the auxiliary power outlets was obtained from the same filtered source that provides input power to the LISN.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information could be useful in reducing their amplitude.

3.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

3.2 Test Data: LAN--10M

Table 3.2.1 Telecommunication Port Conducted Emission

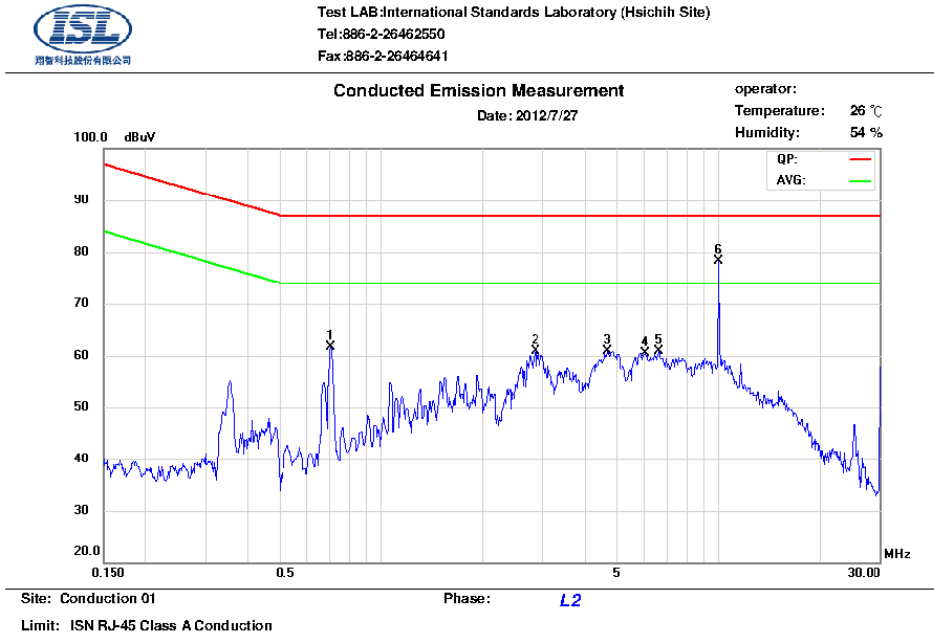

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.7070	9.99	0.05	58.07	87.00	-28.93	54.33	74.00	-19.67	
2	2.8445	9.98	0.13	57.50	87.00	-29.50	45.70	74.00	-28.30	
3	4.6310	9.97	0.17	57.80	87.00	-29.20	47.69	74.00	-26.31	
4	6.0500	9.97	0.18	54.54	87.00	-32.46	46.06	74.00	-27.94	
5	6.6500	9.97	0.19	55.99	87.00	-31.01	47.20	74.00	-26.80	
6	10.0000	9.98	0.22	76.76	87.00	-10.24	60.97	74.00	-13.03	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.3 Test Data: LAN--100M

Table 3.3.1 Telecommunication Port Conducted Emission

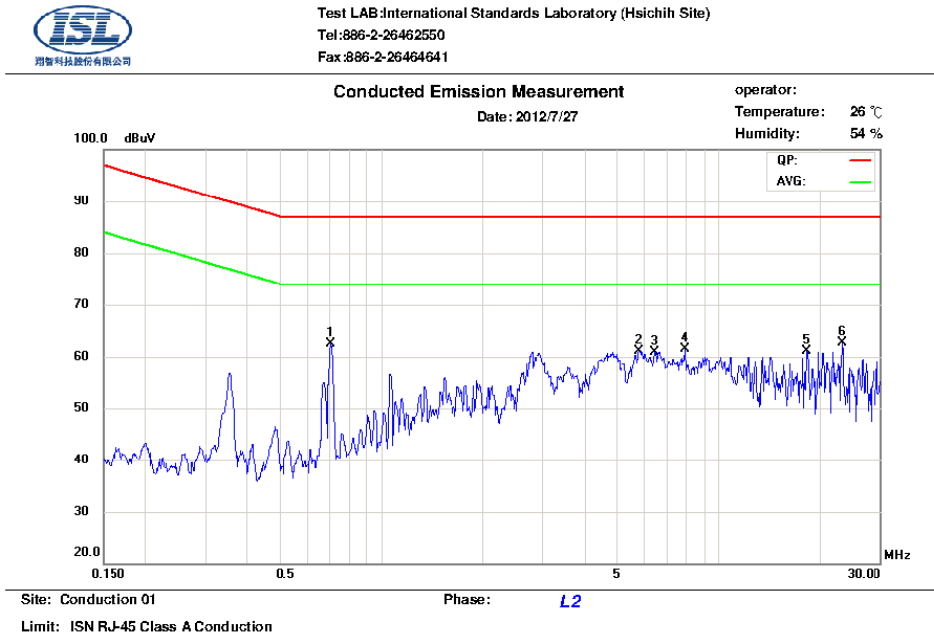

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.7070	9.99	0.05	58.55	87.00	-28.45	54.36	74.00	-19.64	
2	5.8250	9.97	0.18	56.16	87.00	-30.84	47.15	74.00	-26.85	
3	6.4750	9.97	0.18	54.81	87.00	-32.19	46.05	74.00	-27.95	
4	7.9000	9.98	0.20	54.07	87.00	-32.93	44.96	74.00	-29.04	
5	18.2500	9.98	0.27	47.07	87.00	-39.93	44.62	74.00	-29.38	
6	23.1250	9.99	0.30	59.51	87.00	-27.49	56.38	74.00	-17.62	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

3.4 Test Data: LAN--GIGA (Voltage)

Table 3.4.1 Telecommunication Port Conducted Emission

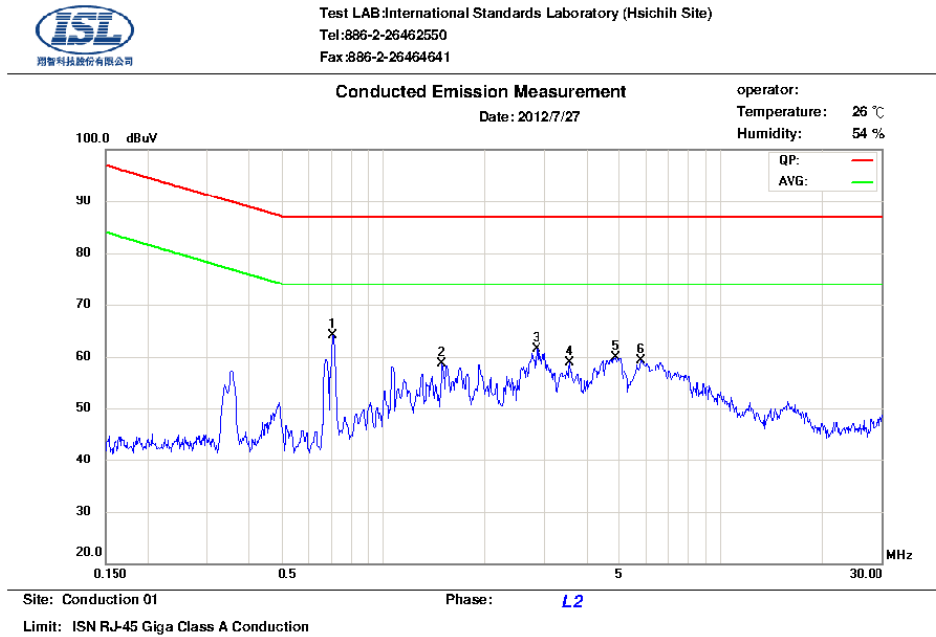

No.	Frequency MHz	LISN Loss dB	Cable Loss dB	QP Correct. dBuV	QP Limit dBuV	QP Margin dB	AVG Correct. dBuV	AVG Limit dBuV	AVG Margin dB	Note
1	0.7070	10.03	0.05	58.51	87.00	-28.49	53.63	74.00	-20.37	
2	1.4855	10.02	0.09	53.20	87.00	-33.80	43.98	74.00	-30.02	
3	2.8400	10.04	0.13	56.84	87.00	-30.16	46.14	74.00	-27.86	
4	3.5555	10.05	0.15	53.58	87.00	-33.42	43.86	74.00	-30.14	
5	4.8695	10.07	0.17	55.95	87.00	-31.05	46.83	74.00	-27.17	
6	5.8250	10.09	0.18	54.32	87.00	-32.68	46.10	74.00	-27.90	

Note :

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.



3.5 Test Setup Photo

Refer to the Setup Photos for Power Main Port Conducted Emissions

4. Radiated Disturbance Emissions

4.1 Test Setup and Procedure

4.1.1 Test Setup

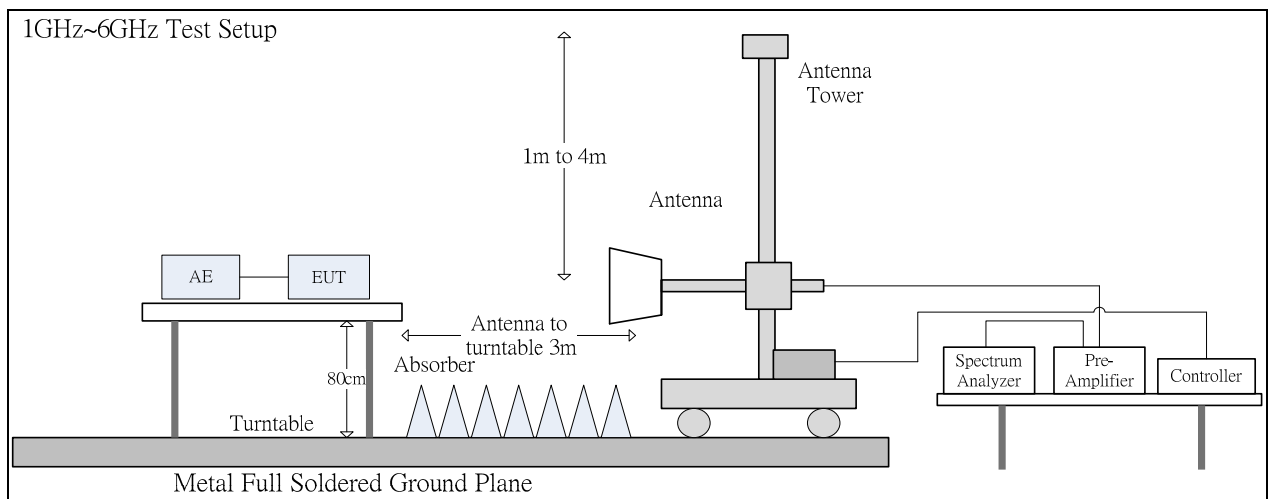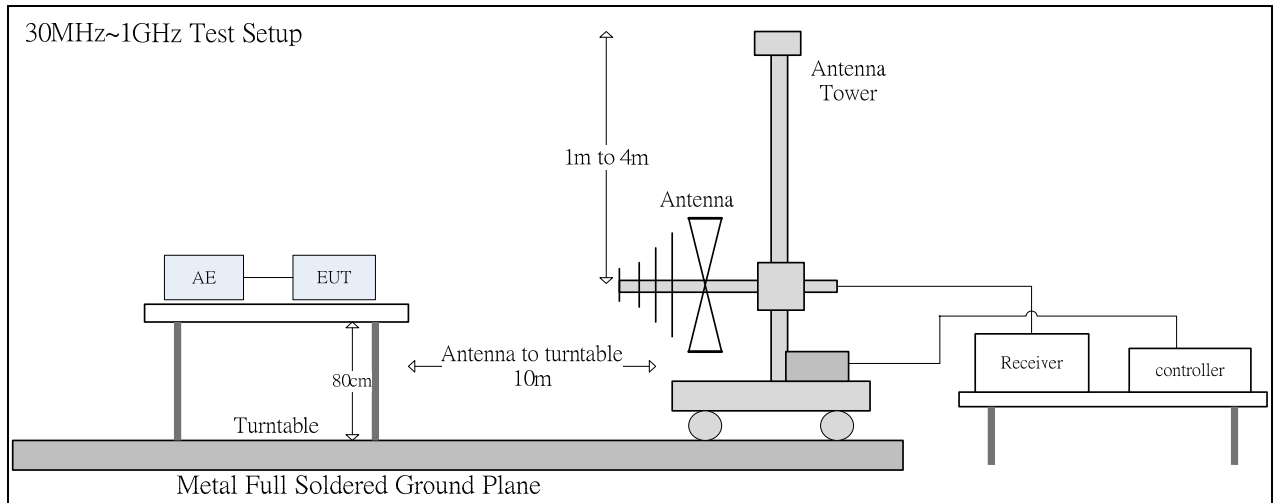

4.1.2 Test Procedure

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter open field sites or 10 meter chamber. Desktop EUT are set up on a wooden stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes. If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.


4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
Detector Function: Quasi-Peak Mode
Resolution Bandwidth: 120KHz

Frequency Range: Above 1 GHz to 6 GHz
Detector Function: Peak/Average Mode
Resolution Bandwidth: 1MHz

4.2 Radiation Test Data: Configuration 1

Table 4.2.1 Radiated Emissions (Horizontal)

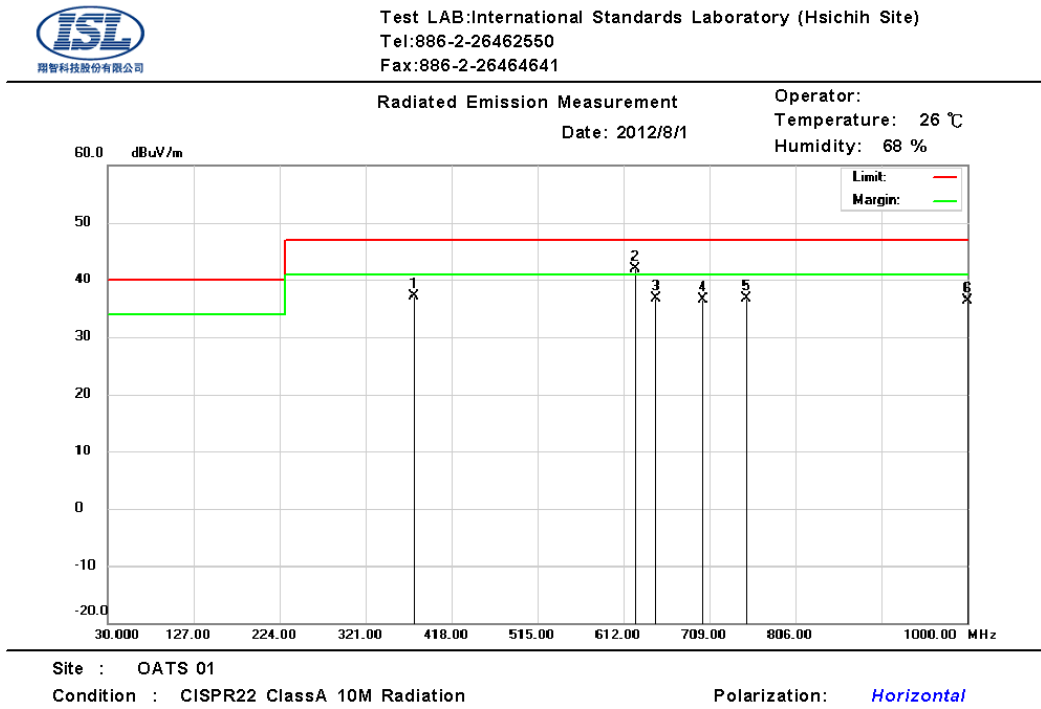

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	374.4900	20.26	14.94	1.98	0.00	37.18	47.00	-9.82	100	96	QP
2	624.8800	20.20	19.15	2.6	0.00	41.95	47.00	-5.05	128	144	QP
3	648.1300	14.35	19.66	2.66	0.00	36.67	47.00	-10.33	113	267	QP
4	701.3100	13.47	20.21	2.77	0.00	36.45	47.00	-10.55	310	321	QP
5	749.9300	13.28	20.6	2.88	0.00	36.76	47.00	-10.24	264	228	QP
6	1000.0000	9.62	23.3	3.36	0.00	36.28	47.00	-10.72	146	111	QP

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.




Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

File : 101-08-01
97.0 dBuV/m

Radiated Emission Measurement
Data : #5
Date: 2012/8/1
Time: AM 09:06:16

Operator:
Temperature: 25 °C
Humidity: 55 %

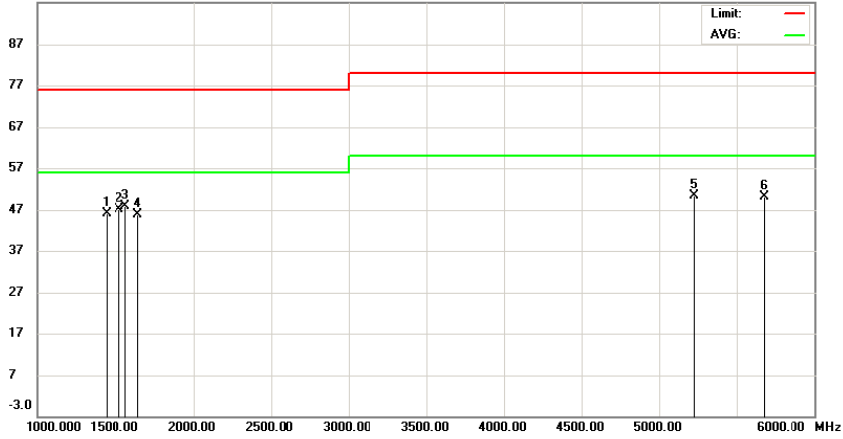

Site : Chamber 01
Condition : CISPR22 ClassA 3M Radiation
Company :
EUT Model:
Execute Program :
Note :

Polarization: *Horizontal*
Power :
Witness:

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1440.705	66.27	28.3	3.54	52.04	46.07	76.00	-29.93	102	287	peak
2	1512.821	67.29	28.37	3.64	52.05	47.25	76.00	-28.75	123	37	peak
3	1560.897	67.54	28.64	3.69	52.06	47.81	76.00	-28.19	140	328	peak
4	1633.013	65.06	29.04	3.78	52.07	45.81	76.00	-30.19	100	149	peak
5	5222.756	61.76	34.28	7.05	52.66	50.43	80.00	-29.57	100	117	peak
6	5679.487	60.76	34.69	7.35	52.68	50.12	80.00	-29.88	113	357	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


Horn Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

Table 4.2.2 Radiated Emissions (Vertical)



Test LAB: International Standards Laboratory (Hsichih Site)
Tel: 886-2-26462550
Fax: 886-2-26464641

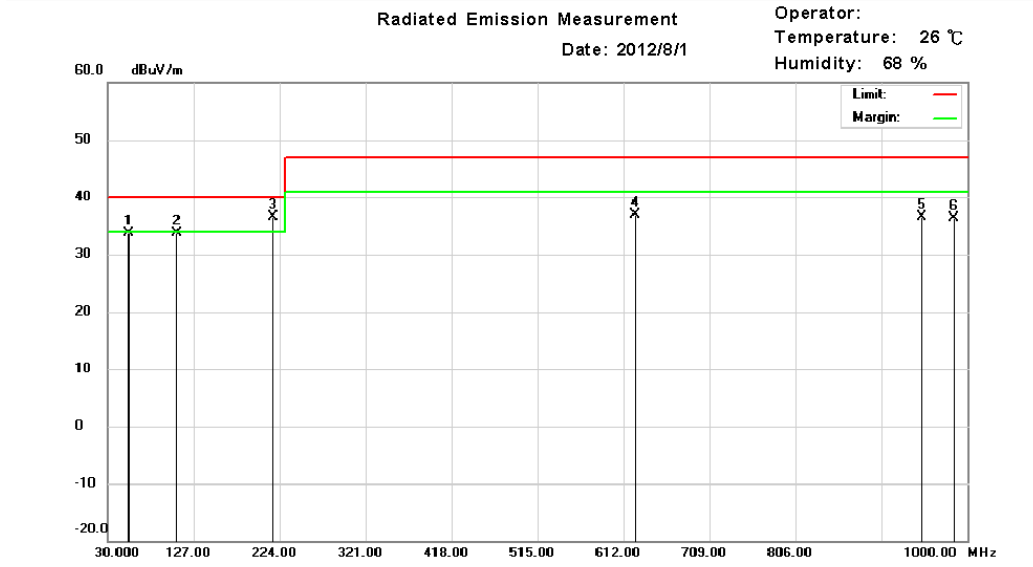

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	53.4100	25.12	7.83	0.75	0.00	33.70	40.00	-6.30	100	199	QP
2	107.9400	20.06	12.59	1.03	0.00	33.68	40.00	-6.32	106	327	QP
3	215.5800	24.34	10.61	1.47	0.00	36.42	40.00	-3.58	307	144	QP
4	624.7600	15.20	19.14	2.6	0.00	36.94	47.00	-10.06	175	211	QP
5	947.8900	10.47	22.78	3.24	0.00	36.49	47.00	-10.51	222	213	QP
6	984.2600	9.93	23.14	3.32	0.00	36.39	47.00	-10.61	134	38	QP

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.




Test LAB:International Standards Laboratory (Hsichih Site)
Tel:886-2-26462550
Fax:886-2-26464641

File :101-08-01
97.0 dBuV/m

Radiated Emission Measurement
Data :#6
Date: 2012/8/1
Time: AM 09:39:00

Operator:
Temperature: 25 °C
Humidity: 55 %

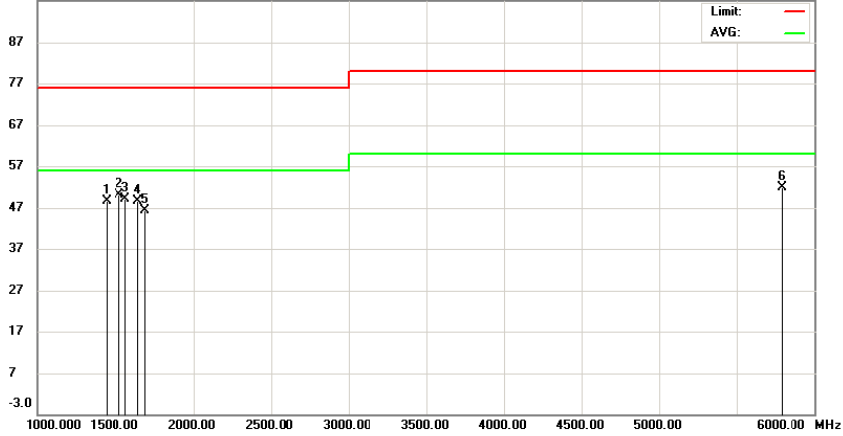

Site : Chamber 01
Condition : CISPR22 ClassA 3M Radiation
Company :
EUT Model:
Execute Program :
Note :

Polarization: *Vertical*
Power :
Witness:

Mk.	Frequency (MHz)	RX_R (dBuV/m)	Ant_F (dB)	Cab_L (dB)	PreAmp (dB)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1440.705	68.71	28.3	3.54	52.04	48.51	76.00	-27.49	178	135	peak
2	1512.821	70.11	28.37	3.64	52.05	50.07	76.00	-25.93	156	21	peak
3	1560.897	68.92	28.64	3.69	52.06	49.19	76.00	-26.81	160	117	peak
4	1633.013	67.84	29.04	3.78	52.07	48.59	76.00	-27.41	130	312	peak
5	1681.090	65.22	29.31	3.84	52.08	46.29	76.00	-29.71	121	355	peak
6	5783.654	62.19	34.85	7.42	52.69	51.77	80.00	-28.23	109	289	peak

*:Maximum data x:Over limit !:over margin

* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Horn Antenna Distance: 3 meters

Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

4.3 Test Setup Photo


Front View (30MHz~1GHz)




Back View (30MHz~1GHz)



Front View (above 1GHz)

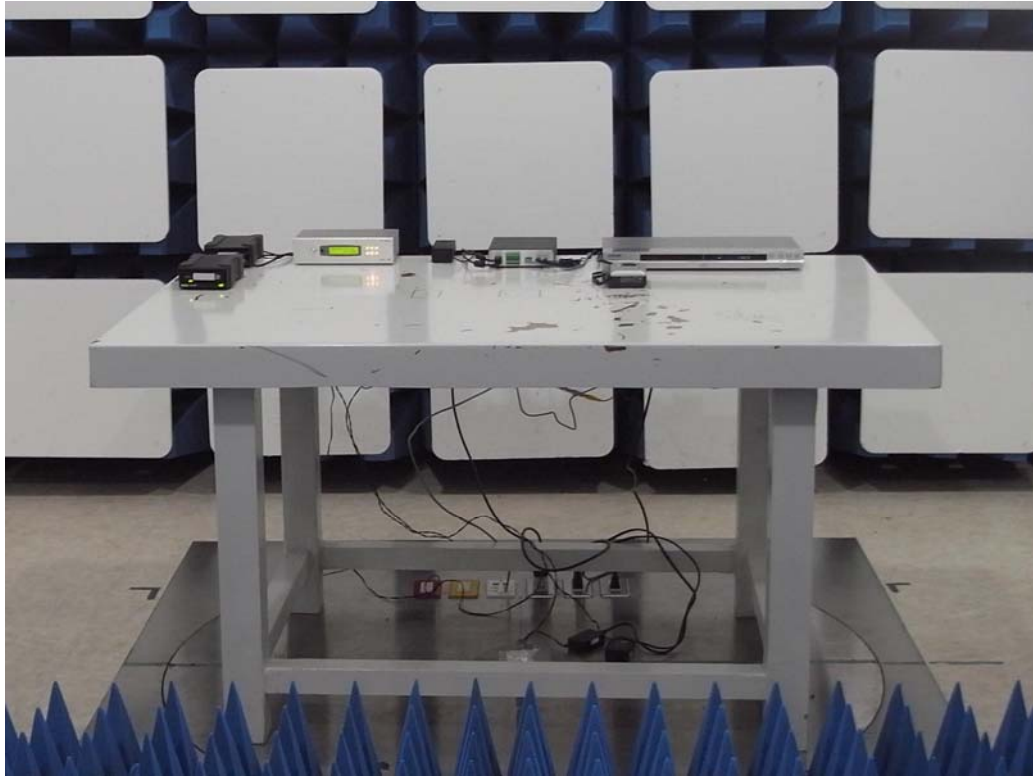

Back View (above 1GHz)

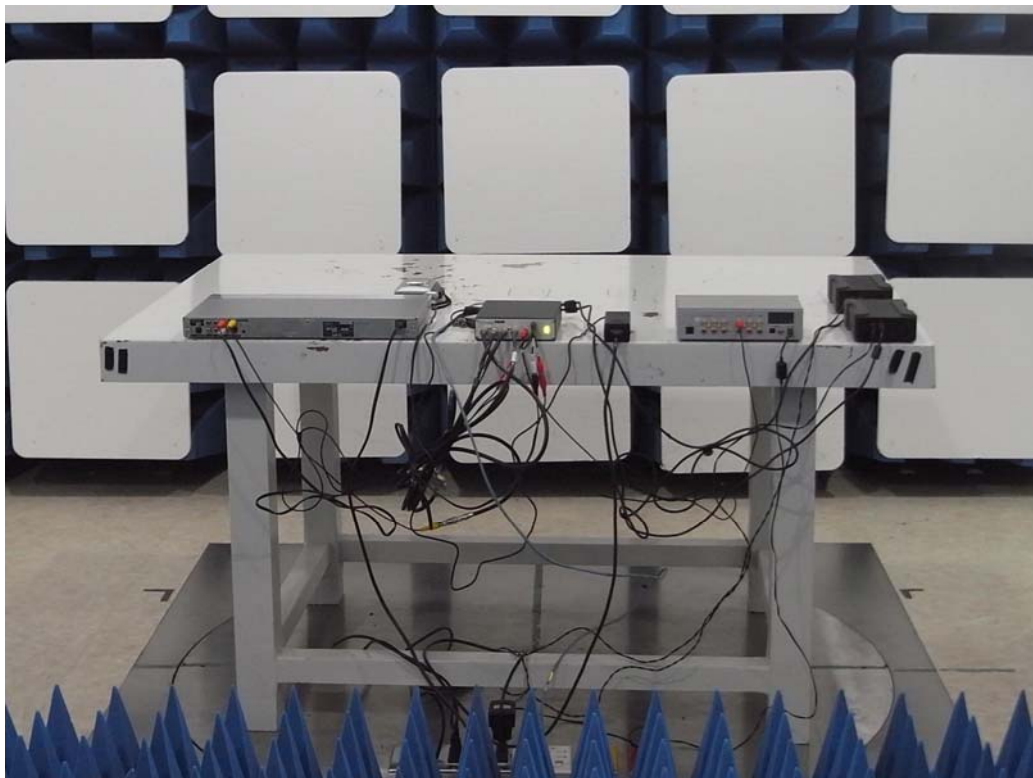

5. Electrostatic discharge (ESD) immunity

5.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2/ IEC EN61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S7
Temperature:	24 °C
Humidity:	56%

Selected Test Point


Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.

Contact: Total 200 discharges minimum were to the selected contact points.

Indirect Contact Points: 25 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

5.2 Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470KΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.


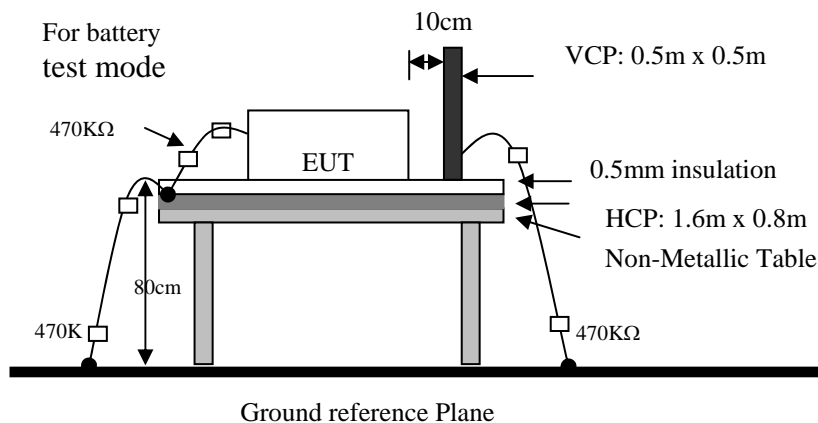


5.3 Test Result


Performance of EUT complies with the given specification.

5.4 Test Point

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

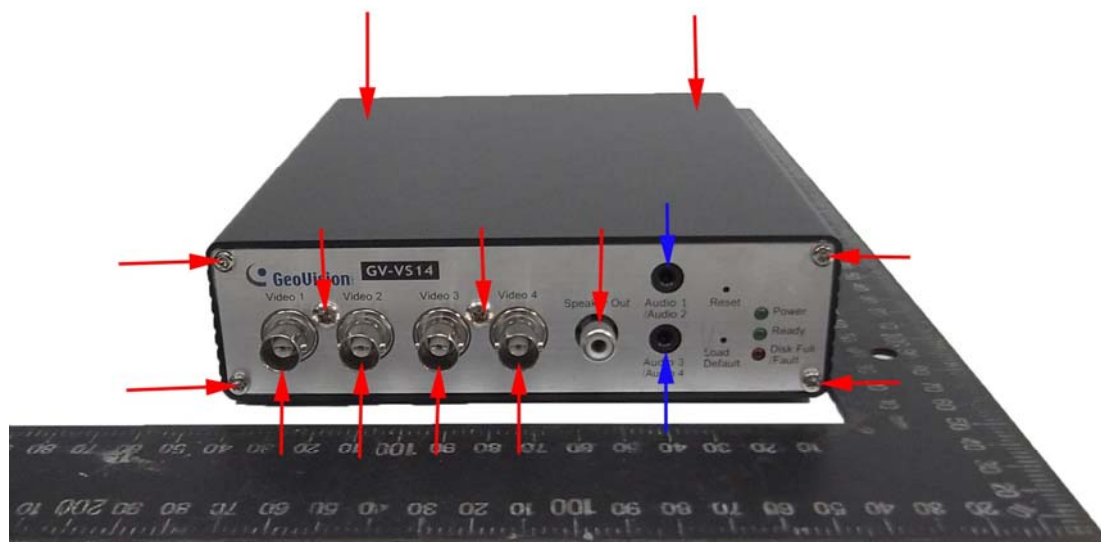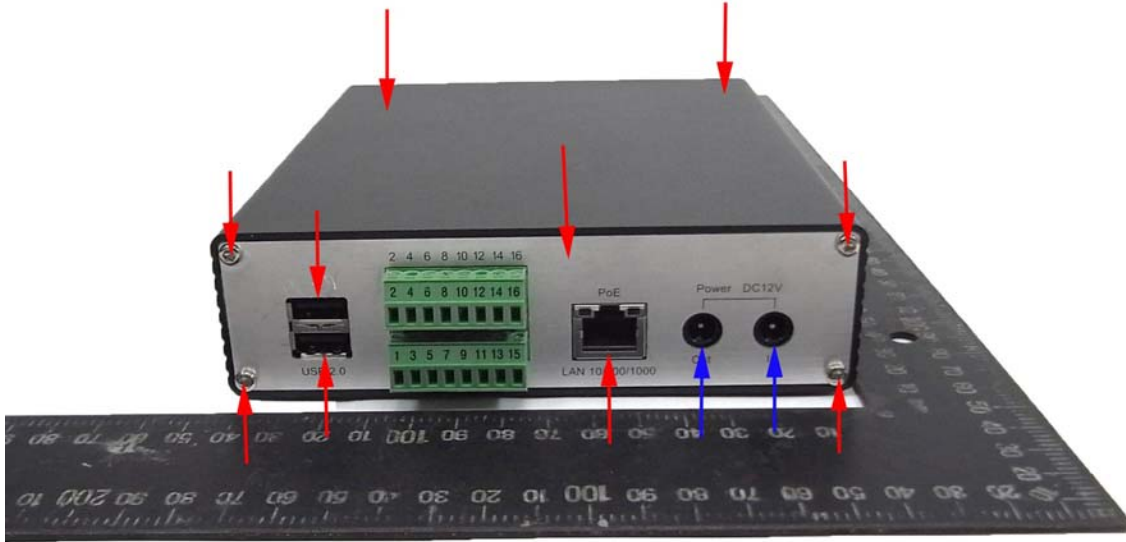

5.5 Test Setup Photo

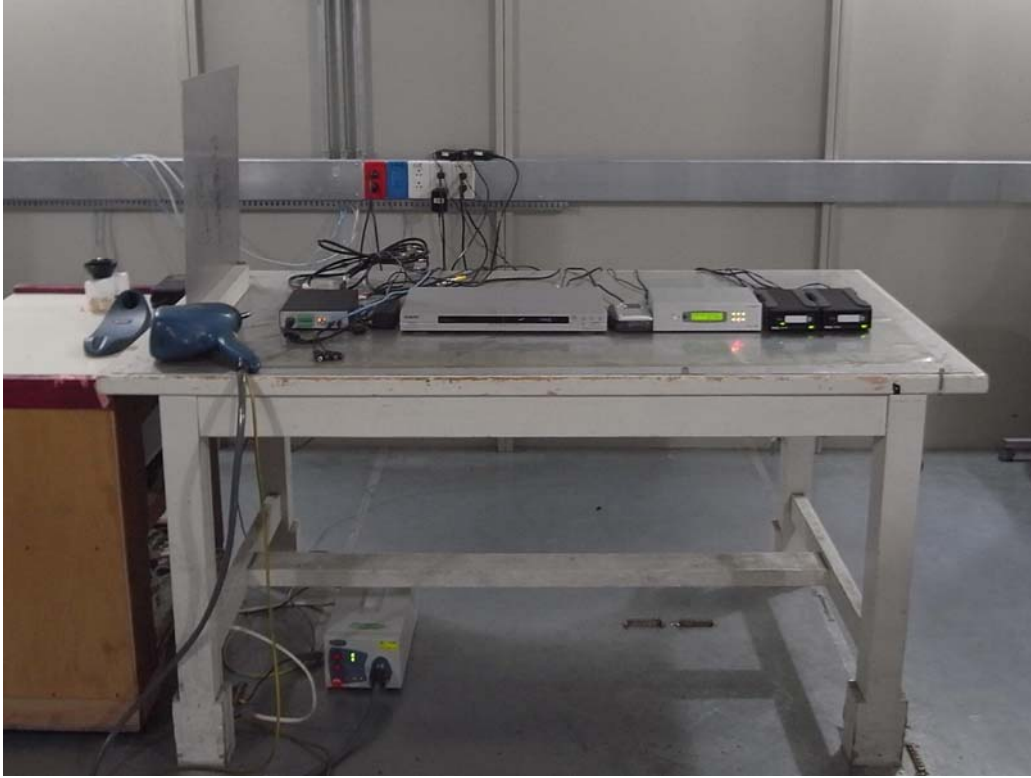


6. Radio-Frequency, Electromagnetic Field immunity

6.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3/ IEC EN61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1KHz 80%
Frequency range:	80 MHz~1 GHz
Frequency Step:	1% of last step frequency
Dwell time:	3s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	☒0° ☒90° ☒180° ☒270°
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S8
Temperature:	24°C
Humidity:	58%

6.2 Test Setup


The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

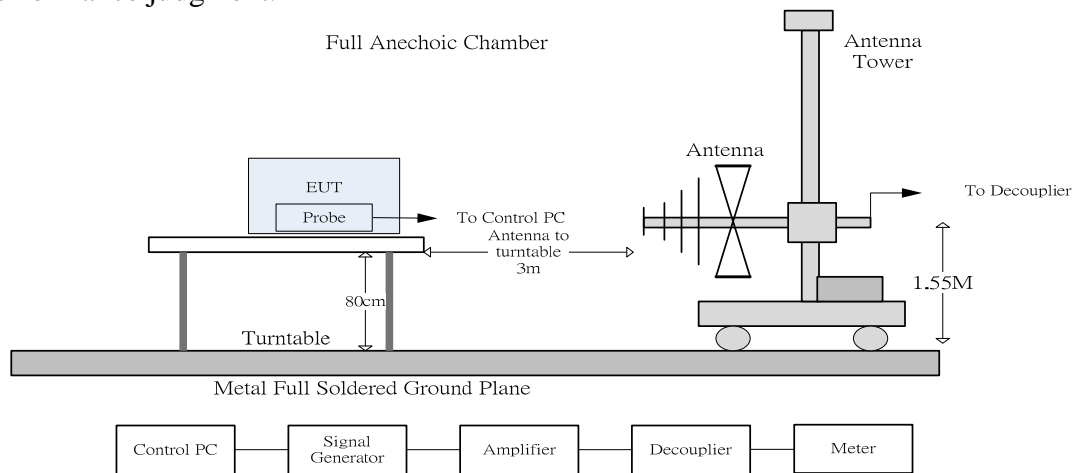

6.3 Test Result

Performance of EUT complies with the given specification.

6.4 Test Setup Photo

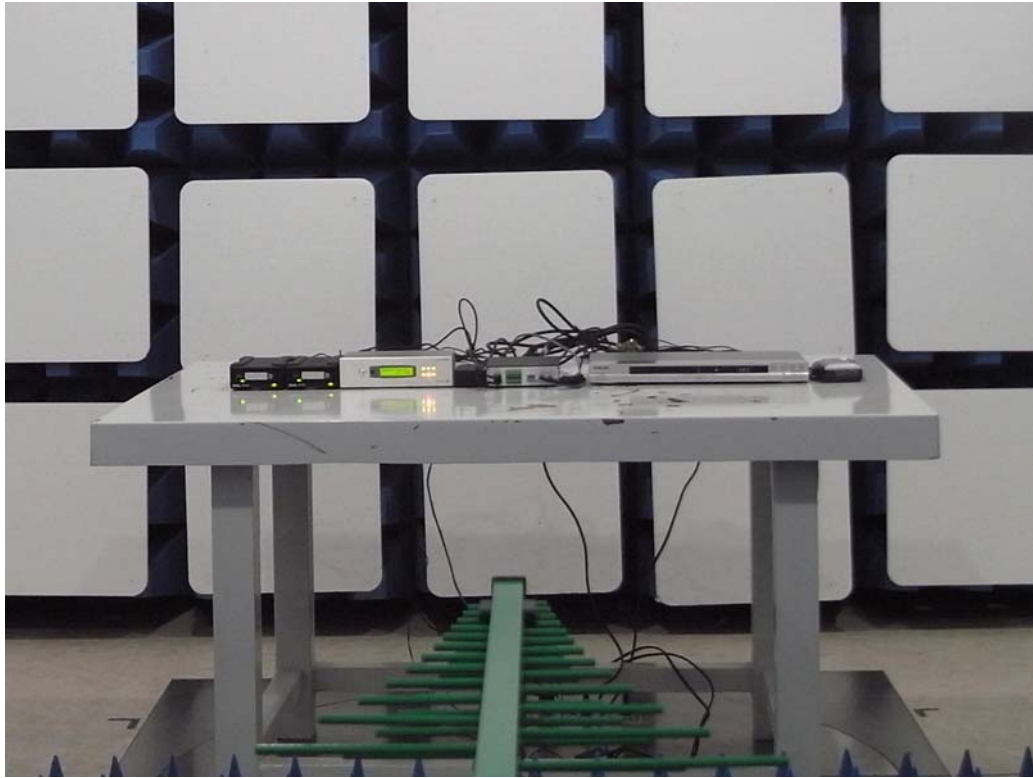

7. Electrical Fast transients/burst immunity

7.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-4/ IEC EN61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV
Rise Time:	5ns
Hold Time:	50ns
Repetition Frequency:	5KHz
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S9
Temperature:	24 °C
Humidity:	59%

Test Procedure



The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec
Capacitive coupling clamp	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

7.2 Test Setup


EUT is at least 50cm from the conductive structure.

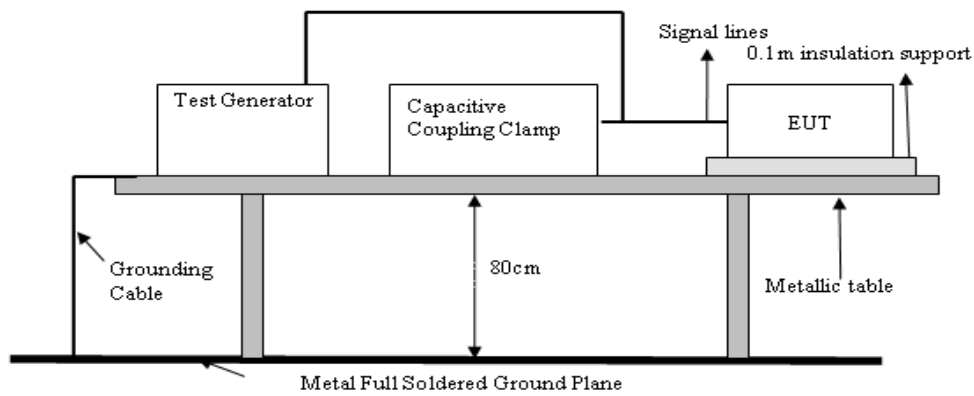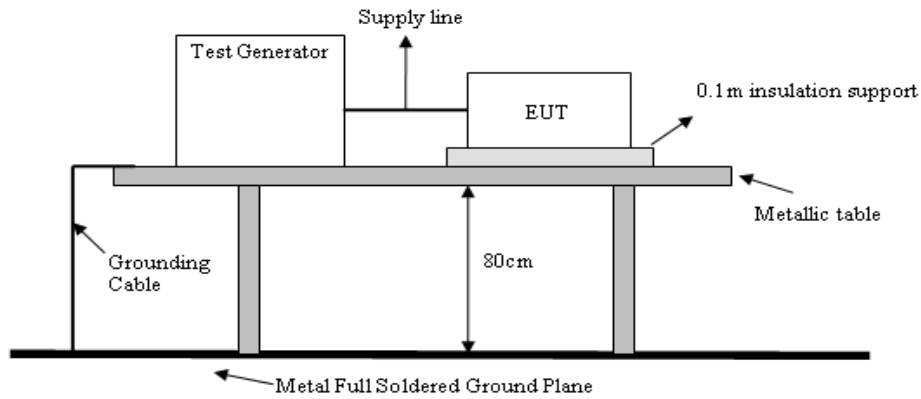

7.3 Test Result

Performance of EUT complies with the given specification.

7.4 Test Setup Photo

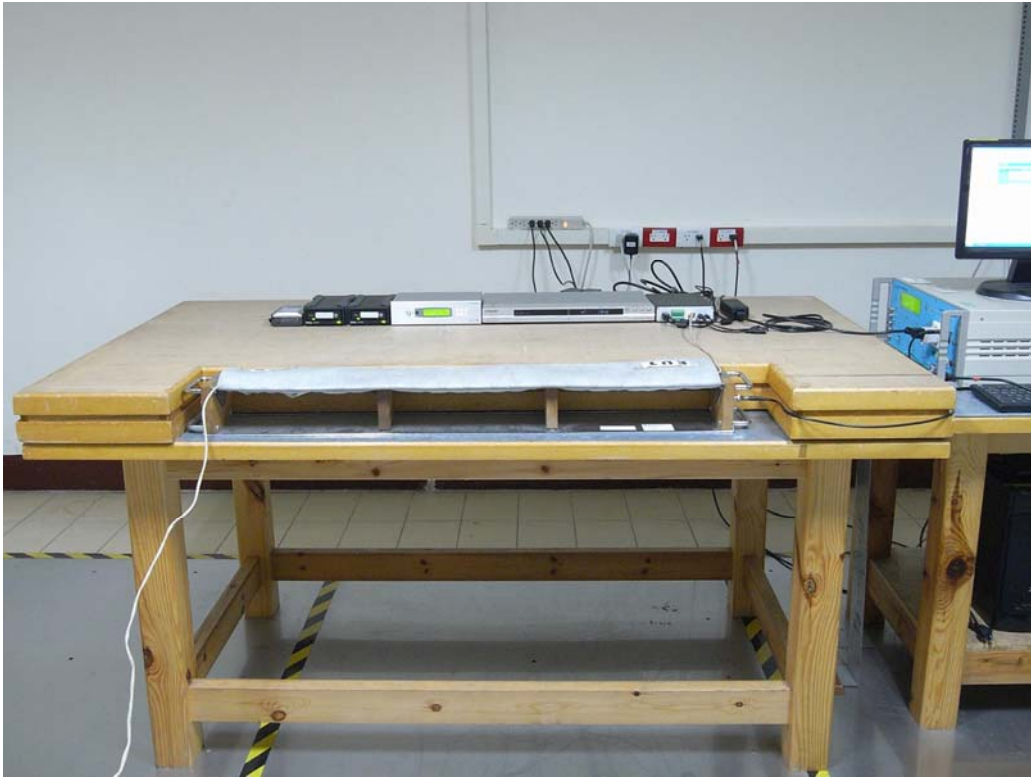


8. Surge Immunity

8.1 Test Specification

Port:	AC mains	Signal and telecommunication port-NA
Basic Standard:	EN 61000-4-5/ IEC EN61000-4-5 (details referred to Sec 1.2)	
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV	Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 4 kV
Rise Time:	1.2us	10us
Hold Time:	50us	700us
Repetition Rate:	30 second	60 second
Angle:	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°	NA
Criteria:	B	NA
Remarks:		Where the coupling network for the 10/700 us waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) us waveform and appropriate coupling network.
Test Procedure:	refer to ISL QA -T4-E-S10	
Temperature:	24°C	
Humidity:	59%	


8.2 Test Setup

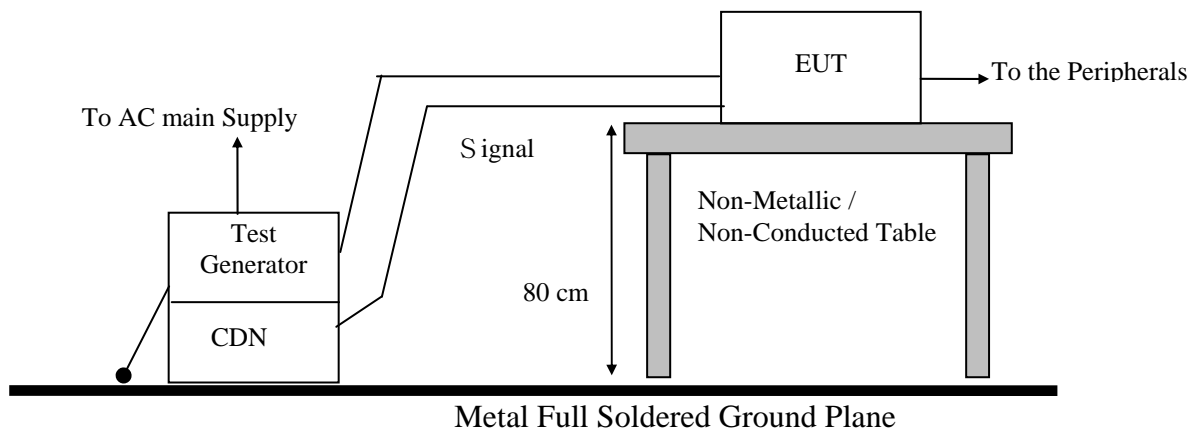

8.3 Test Result

Performance of EUT complies with the given specification.

8.4 Test Setup Photo

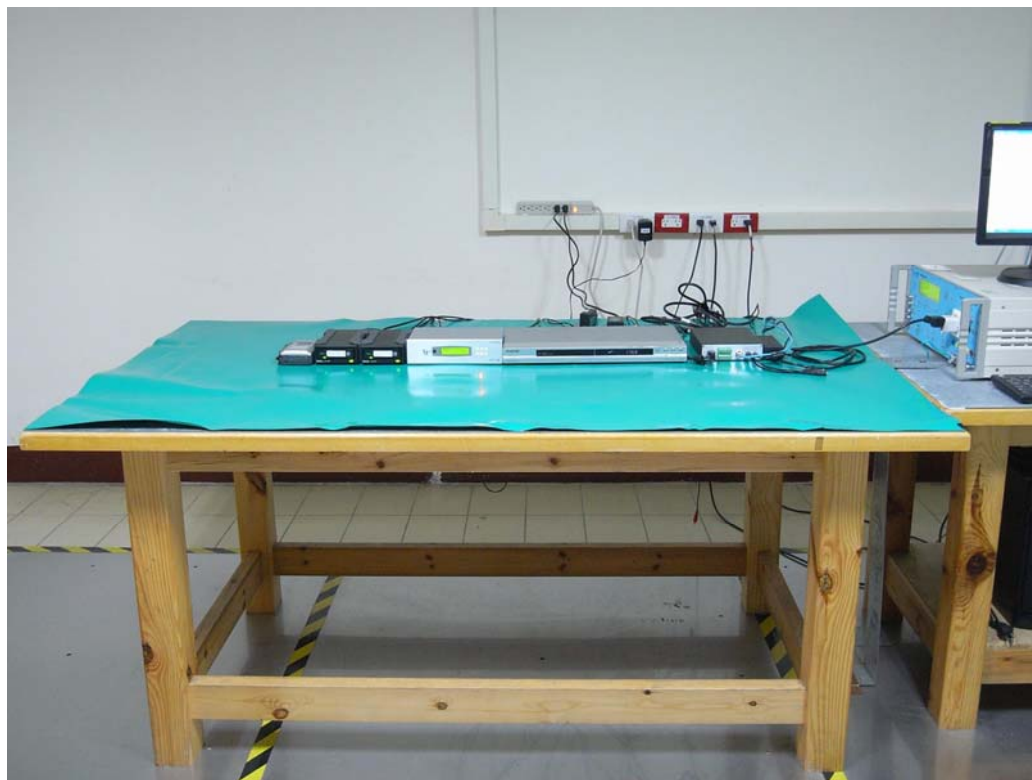


9. Immunity to Conductive Disturbance

9.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-6/ IEC EN61000-4-6 (details referred to Sec 1.2)
Test Level:	3 V
Modulation:	AM 1KHz 80%
Frequency range:	0.15 MHz - 80MHz
Frequency Step:	1% of last Frequency
Dwell time:	3s
Criteria:	A
CDN Type:	CDN M2+M3, CDN T2, CDN T4, CDN T8, EM Clamp
Test Procedure	refer to ISL QA -T4-E-S11
Temperature:	24°C
Humidity:	56%

9.2 Test Setup

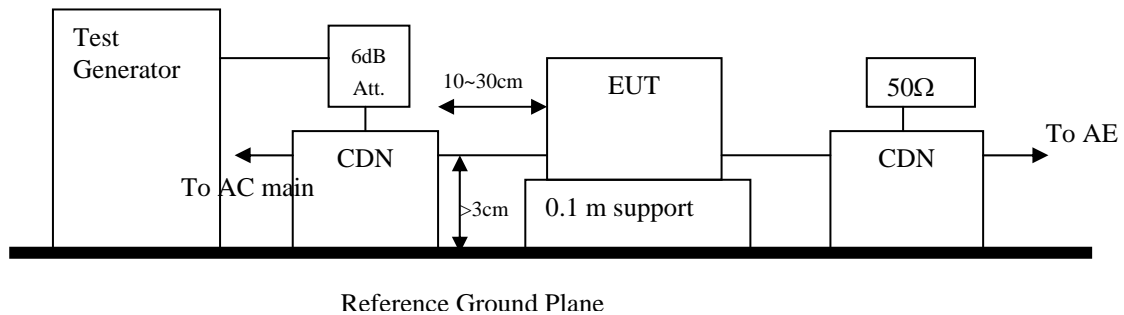

9.3 Test Result

Performance of EUT complies with the given specification.

9.4 Test Setup Photo




10. Power Frequency Magnetic Field immunity

10.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8/ IEC EN61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S12
Temperature:	24°C
Humidity:	59%


10.2 Test Setup

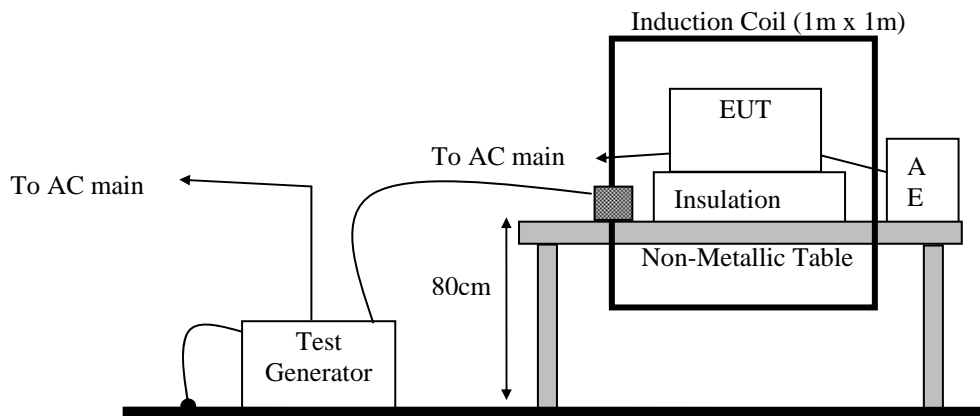

10.3 Test Result

Performance of EUT complies with the given specification.

10.4 Test Setup Photo

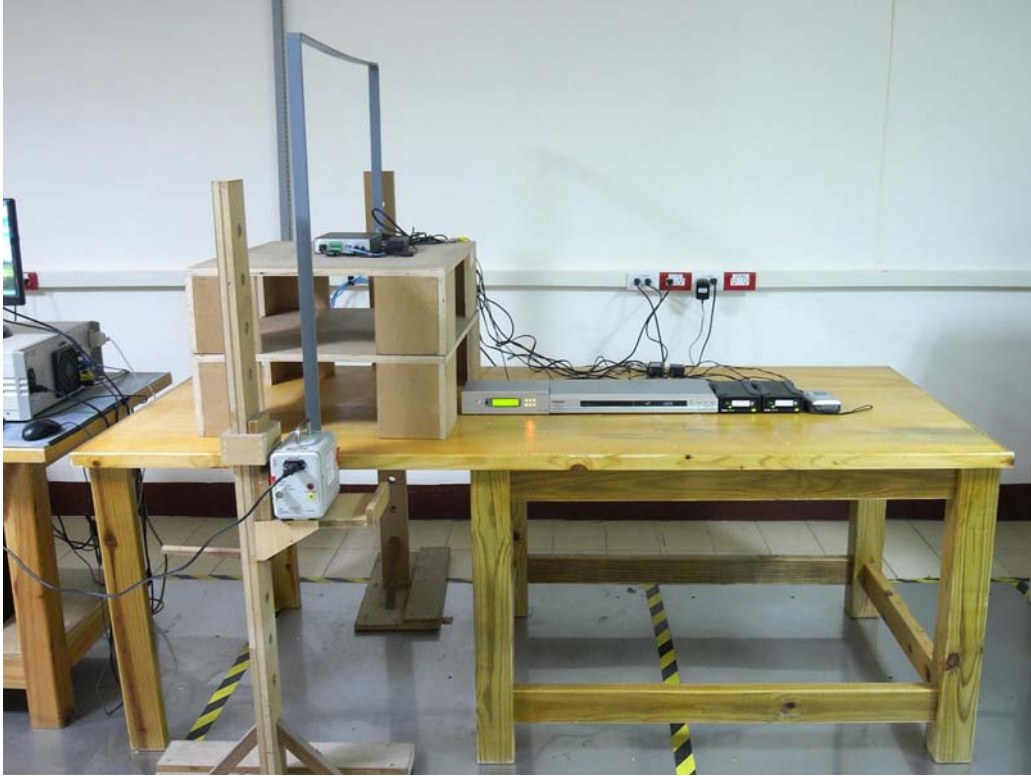


11. Voltage Dips, Short Interruption and Voltage Variation immunity

11.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11/ IEC EN61000-4-11 (details referred to Sec 1.2)
Test Level: Criteria:	>95% in 0.5 period B
Test Level: Criteria:	30% in 25 period C
Test Level: Criteria:	>95% in 250 period C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure	refer to ISL QA -T4-E-S13
Temperature:	24°C
Humidity:	59%


11.2 Test Setup

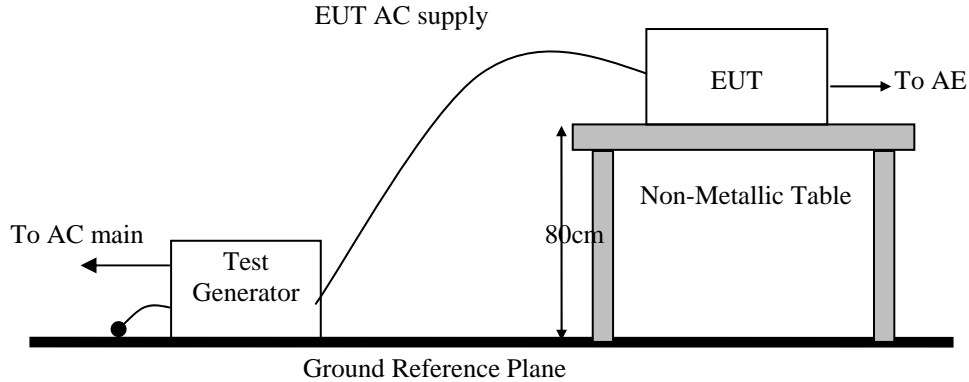

11.3 Test Result

Performance of EUT complies with the given specification.

11.4 Test Setup Photo

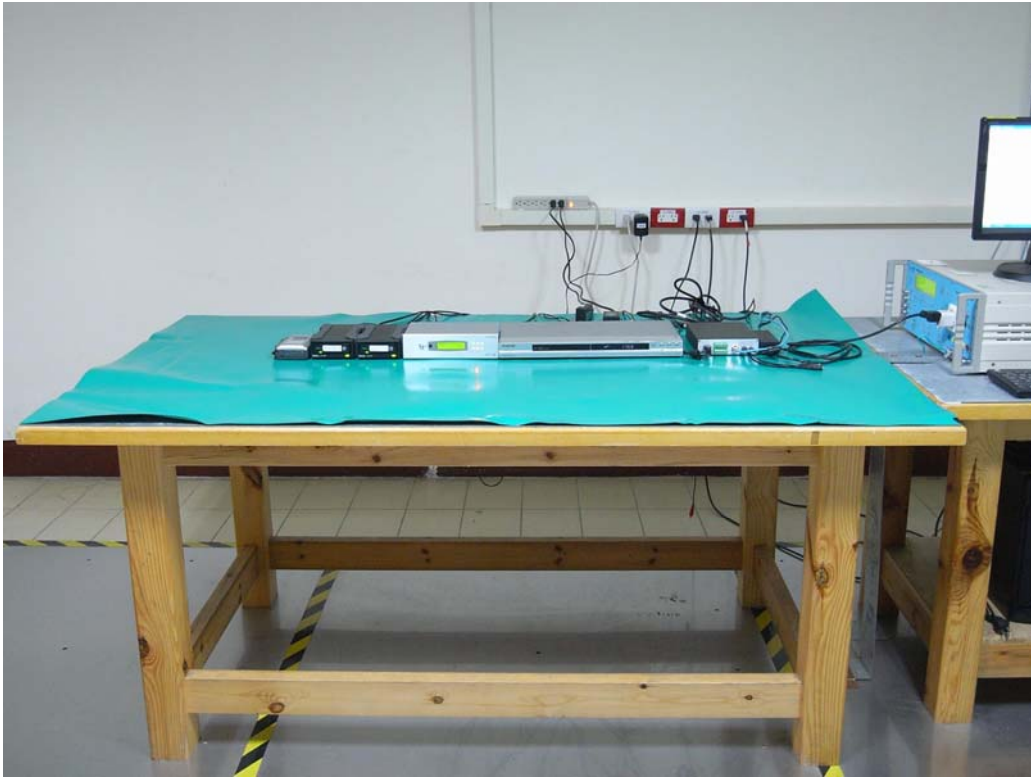

12. Harmonics

12.1 Test Specification


Port:	AC mains
Active Input Power:	<75W
Basic Standard:	EN61000-3-2/IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	A
Test Procedure	refer to ISL QA -T4-E-S14
Temperature:	25°C
Humidity:	60%

Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

12.2 Test Setup

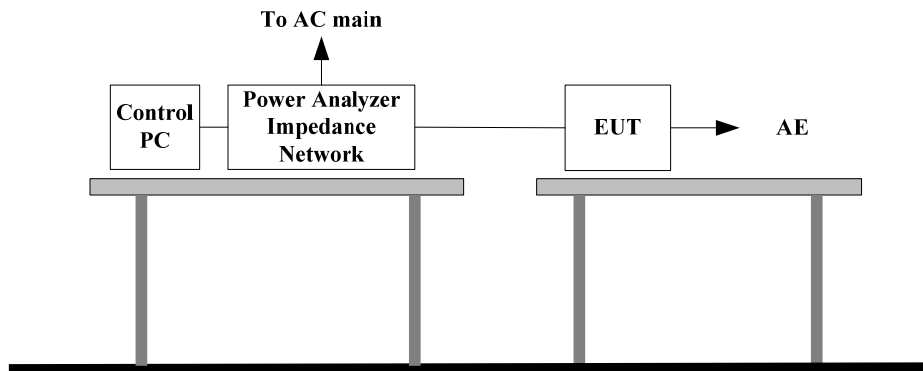

12.3 Test Result

Active input power under 75W, no limit apply, declare compliance.

12.4 Test Setup Photo



13. Voltage Fluctuations


13.1 Test Specification

Port:	AC mains
Basic Standard:	EN61000-3-3/IEC61000-3-3 (details referred to Sec 1.2)
Test Procedure	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min For Plt 2 hours
Temperature:	25°C
Humidity:	60%

Test Procedure

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

13.2 Test Setup

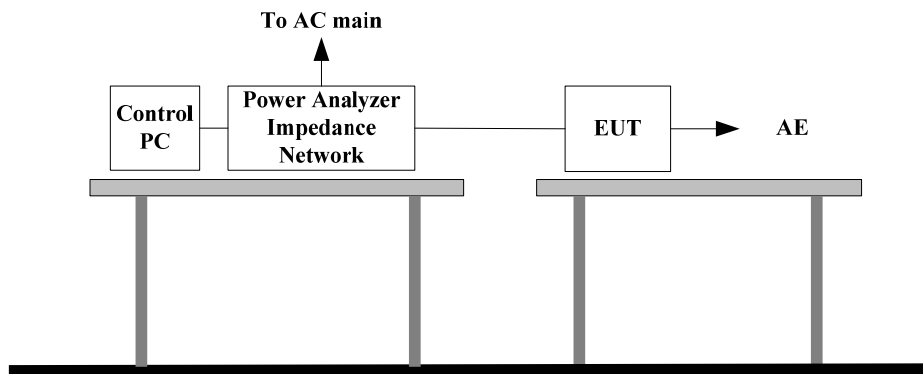


13.3 Test Result

Performance of EUT complies with the given specification.

Test Data:

10min

Flickermeter 1000-4-15 for 230V/50Hz

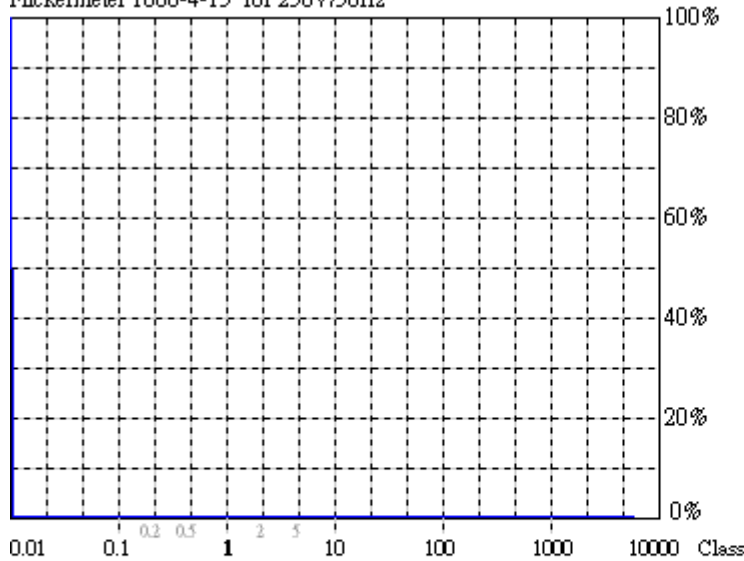

Actual Flicker (Fli): 0.00
Short-term Flicker (Pst): 0.07
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.07
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.00%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.00%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

2012/8/3 AM 08:30:56

U_{rms} = 229.9 V P = 5.706 W
 I_{rms} = 0.064 A pf = 0.385


Range: 0.5 A
 V_{nom}: 230 V
 TestTime: 10 min (100%)

Test completed, Result: PASSED

HAR-1000 BnC-Retrie

120min

Flickermeter 1000-4-15 for 230V/50Hz

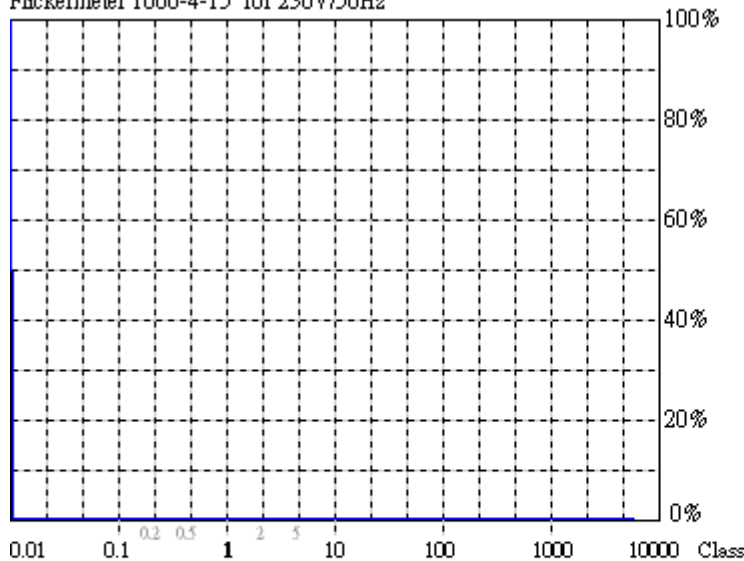

Actual Flicker (Fli): 0.00
Short-term Flicker (Pst): 0.07
 Limit (Pst): 1.00
Long-term Flicker (Plt): 0.07
 Limit (Plt): 0.65
Maximum Relative Volt. Change (dmax): 0.00%
 Limit (dmax): 4.00%
Relative Steady-state Voltage Change (dc): 0.00%
 Limit (dc): 3.30%
Maximum Interval exceeding 3.30% (dt): 0.00ms
 Limit (dt>Lim): 500ms

Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)

2012/8/3 AM 10:32:44

U_{rms} = 229.7 V P = 6.099 W
 I_{rms} = 0.069 A pf = 0.386

Range: 0.5 A
 V_{nom}: 230 V
 TestTime: 120 min (10000%)

Test completed, Result: PASSED

HAR-1000 BnC-Retrie

13.4 Test Setup Photo

Refer to the Setup Photo for Harmonics

14. Appendix

14.1 Appendix A: Test Equipment

14.1.1 Test Equipment List

Location CON01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C1	EMEC	5D Cable	1F-C1	10/25/2011	10/25/2012
Conduction	LISN 02	EMCO	3825/2	1407	07/28/2012	07/28/2013
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/010	07/28/2012	07/28/2013
Conduction	ISN T2 03	FCC	FCC-TLISN-T 2-02	20618	07/28/2012	07/28/2013
Conduction	ISN T4 05	FCC	FCC-TLISN-T 4-02	20619	07/28/2012	07/28/2013
Conduction	ISN T8 03	FCC	FCC-TLINS-T 8-02	20620	07/28/2012	07/28/2013
Conduction	EMI Receiver 15	ROHDE & SCHWARZ	ESCI	101166	04/24/2012	04/24/2013

Location OATS01	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation	BILOG Antenna 10	Sumol Sciences	JB1	A013004-1	07/18/2012	07/18/2013
Radiation	Coaxial Cable 3F-10M	EMCI	CFD400-NL	ISL-R001	03/16/2012	03/16/2013
Radiation	EMI Receiver 13	ROHDE & SCHWARZ	ESCI	101015	02/22/2012	02/22/2013

Location Chmb14	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1GHz	Spectrum Analyzer 21 (1G~26.5GHz)	Agilent	N9010A	MY49060537	07/18/2012	07/17/2013
Rad. Above 1GHz	Spectrum Analyzer 22	R&S	FSU43	100143	04/26/2012	04/26/2013
Rad. Above 1GHz	Horn Antenna 06 (1G~18G)	ETS	3117	00066665	09/21/2011	09/20/2012
Rad. Above 1GHz	Horn Antenna 04 (18G~26G)	Com-Power	AH-826	081-001	05/04/2011	05/04/2013
Rad. Above 1GHz	Horn Antenna 05 (26G~40G)	Com-Power	AH-640	100A	01/11/2011	01/10/2013
Rad. Above 1GHz	SUCOFLEX 1GHz~18GHz cable	HUBER SUHNER	Sucoflex 106	67618/6 and 67619/6	02/10/2012	02/10/2013
Rad. Above 1GHz	Preamplifier 13	MITEQ	JS44-0010180 0-25-10P-44	1329256	07/19/2012	07/18/2013
Rad. Above 1GHz	SUCOFLEX 1GHz~40GHz cable	HUBER SUHNER	Sucoflex 102	27963/2&374 21/2	09/21/2011	09/20/2012

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-3-2/3	DC Burn-In Load 02	D-RAM	DBS-2100	2100-910027	N/A	N/A
EN61K-3-2/3	Harmonic/Flicker Test System 03	EMC Partner	HARMONICS-1000	178	03/23/2012	03/23/2013
EN61K-4-,4,5,8,11	TRANSIENT 2000 01	EMC Partner	TRANSIENT-2000	950	12/01/2011	12/01/2012
EN61K-4-2	ESD GUN 04	Schaffner	NSG 438	489	03/28/2012	03/28/2013
EN61K-4-3	BILOG Antenna 06	Schaffner	CBL6112B	2754	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~3.0GHz 60W	AR	60S1G3	312762	N/A	N/A
EN61K-4-3	Broadband coupler 10K~220Mhz	Amplifier Research	DC2500	19810	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180	20364	N/A	N/A
EN61K-4-3	Broadband Coupler 1~4GHz	Werlatone	C5291	6516	N/A	N/A
EN61K-4-3	Coaxial Cable Chmb 04-3M-2	Belden	RG-8/U	Chmb 04-3M-2	N/A	N/A
EN61K-4-3	Signal Generator 03	Anritsu	MG3642A	6200162550	06/26/2012	06/26/2013
EN61K-4-4	Digital Oscilloscope	Tektronix	TDS 684A	B010761	N/A	N/A
EN61K-4-4	EFT Clamp	Precision	1604242	CNEFT1000-103	N/A	N/A
EN61K-4-5	CDN-UTP8 01	EMC Partner	CDN-UTP8	032	12/01/2011	12/01/2012
EN61K-4-5	SURGE-TESTER 01	EMC Partner	MIG0603IN3	778	12/01/2011	12/01/2012
EN61K-4-6	6dB Attenuator	Weinschel Corp	33-6-34	BC5975	N/A	N/A
EN61K-4-6	Amplifier 4-6	Amplifier Research	150A100	1-1-R-02157	N/A	N/A
EN61K-4-6	Attenuator 6dB 4-6	BIRO	100-A-FFN-06	0123	N/A	N/A
EN61K-4-6	CDN M2+M3	Frankonia	M2+M3	A3011016	07/30/2012	07/30/2013
EN61K-4-6	CDN T2 01	Frankonia	T2	A3010003	07/30/2012	07/30/2013
EN61K-4-6	CDN T4 05	FCC Inc.	FCC-801-T4-R J45	08020	08/26/2011	08/26/2012
EN61K-4-6	CDN T8 01	FCC Inc.	FCC-801-T8-R J45	08021	08/26/2011	08/26/2012
EN61K-4-6	EM-Clamp 01	FCC	F-2031-23MM	539	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-1	Harbour Industries	M17/128-RG4 00	4-6 01-1	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-2	Harbour Industries	M17/128-RG4 00	4-6 01-2	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-3	Harbour Industries	M17/128-RG4 00	4-6 01-3	N/A	N/A
EN61K-4-6	KAL-AD RJ45S	BIRO			N/A	N/A
EN61K-4-6	KAL-AD T2	BIRO			N/A	N/A
EN61K-4-6	Passive Impedance Adaptor 4-6	FCC	FCC-801-150-50-CDN	9758;9759	N/A	N/A
EN61K-4-6, CISPR 13, Antenna	Signal Generator 02	HP	8648B	3642U01040	08/18/2011	08/18/2012
EN61K-4-8	Magnetic Field Antenna	Precision	TRAIZ44B	MF1000-23	N/A	N/A

PS: N/A => The equipment does not need calibration.

14.1.2 Software for Controlling Spectrum/Receiver and Calculating Test Data

Test Item	Filename	Version
EN61000-3-2	HARCS.EXE	4.16
EN61000-3-3	HARCS.EXE	4.16
EN61000-4-3	Tile.Exe	2.0.P
EN61000-4-6	EN61000-4-6 Application Software	1.13.e
EN61000-4-2	N/A	2.0
EN61000-4-4	Tema.EXE	1.69
EN61000-4-5	Tema.EXE	1.69
EN61000-4-8	N/A	
EN61000-4-11	VDS-2002Rs.EXE	2.00

Radiation/Conduction	Filename	Version	Issued Date
Hsichih Conduction	EZ EMC	1.1.4.2	2/10/2007
Hsichih Radiation	EZ EMC	1.1.4.2	1/24/2007

14.2 Appendix B: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2003. The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 01> $\pm 3.262\text{dB}$

<OATS 01 (10M)>

Horizontal

30MHz~200MHz: $\pm 4.216\text{ dB}$

200MHz~1GHz: $\pm 4.438\text{ dB}$

Vertical

30MHz~200MHz: $\pm 4.342\text{ dB}$

200MHz~1GHz: $\pm 4.426\text{ dB}$

<Chamber 14 (3M)>

1GHz~18GHz: $\pm 3.606\text{dB}$

18GHz~26GHz: $\pm 3.618\text{dB}$

<Immunity 01>

Test item	Uncertainty
EN61000-4-2 (ESD)	
Rise time t_r	$\leq 15\%$
Peak current I_p	$\leq 6.3\%$
current at 30 ns	$\leq 6.3\%$
current at 60 ns	$\leq 6.3\%$
EN61000-4-3 (RS)	$\pm 1.776\text{dB}$
EN61000-4-4 (EFT)	
Time	$\pm 1.427\%$
Voltage	$\pm 1.110\%$
Current	
EN61000-4-5 (Surge)	
Time	$\pm 0.588\%$
Voltage	$\pm 1.282\%$
Current	$\pm 1.282\%$
EN61000-4-6 (CS)	$\pm 1.892\text{dB}$
CDN	$\pm 1.36\text{dB}$
EM Clamp	$\pm 3.19\text{dB}$
EN61000-4-8 (Magnetic)	$\pm 1.728\%$
EN61000-4-11 (Dips)	
Time	$\pm 1.159\%$
Voltage	$\pm 0.100\%$
Current	$\pm 1.177\%$
EN61000-3-2 (Harmonics)	$\pm 1.879\%$
EN61000-3-3 (Fluctuations and Flicker)	$\pm 1.879\%$

14.3 Appendix C: Photographs of EUT

Please refer to the File of **ISL-12HE227P**