

# Certificate

Issue Date: 2009/04/16  
Ref. Report No. ISL-09HE104CE

Product Name: : Network Attached Storage  
Model Number(s) : **TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP;  
VioStor-8024U-RP, and others (Please refer to the attachment )**  
Responsible Party : **QNAP Systems, Inc.**  
Address : 21F, No.77, Sec. 1, Xintai 5th Rd.  
Xizhi City, Taipei Country, 221 Taiwan  
Contact Person :

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :

#### Standards:

EN55022: 2006 / CISPR 22:2005; AS/NZS CISPR 22: 2006: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment. (\* Remarks: Testing radiated emissions above 1 GHz is not yet required in Australia.)

EN55024: 1998/A1:2001/A2: 2003; AS/NZS CISPR 24: 2002: Information technology equipment-Immunity characteristics-Limits and methods of measurement.

EN61000-3-2: 2006; AS/NZS 61000.3.2: 2007: Limits for harmonics current emissions

EN61000-3-3: 1995/A1: 2001/A2:2005; AS/NZS 61000.3.3: 2006: Limits for voltage fluctuations and flicker in low-voltage supply systems.

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
\_\_\_\_\_  
Jim Chu/ Director

#### International Standards laboratory

##### Lung-Tan LAB:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.  
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan  
Tel: 886-3-407-1718; Fax: 886-3407-1738

##### His-Chih LAB:

No. 65, Gu Dai Keng St., Hsichih, Taipei Hsien  
22117, Taiwan.  
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

**CE MARK TECHNICAL FILE**

**AS/NZS EMC CONSTRUCTION FILE**

of

Product Name

**Network Attached Storage**

Model

**TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP; VioStor-8024U-RP,  
and others (Please refer to the attachment )**

Contains:

1. Declaration of Conformity
2. EN55022/CISPR 22, AS/NZS CISPR 22 EMI test report
3. EN55024, AS/NZS CISPR 24, EN61000-3-2 / AS/NZS 61000.3.2, and  
EN61000-3-3 / AS/NZS 61000.3.3 test report
4. Certificate of EN60950-1
5. Block Diagram and Schematics
6. Users' manual

## Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 21F, No.77, Sec. 1, Xintai 5th Rd.  
Xizhi City, Taipei Country, 221  
Taiwan

Declares that product: Network Attached Storage

Model: TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP;  
VioStor-8024U-RP, and others (Please refer to the attachment )

Assembled by: Same as above  
Address: Same as above

Conforms to the EMC Directive 2004/108/EC as attested by conformity with the following harmonized standards:

EN55022: 2006 / CISPR 22:2005; AS/NZS CISPR 22: 2006: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment. (\* Remarks: Testing radiated emissions above 1 GHz is not yet required in Australia.)  
EN55024: 1998/A1: 2001/A2: 2003; AS/NZS CISPR 24: 2002: Information technology equipment-Immunity characteristics-Limits and methods of measurement.

Standard	Description	Results	Criteria
EN61000-4-2: 1995/A1: 1998/A2: 2001 AS/NZS 61000.4.2: 2002	Electrostatic Discharge	Pass	B
EN61000-4-3: 2006 AS/NZS 61000.4.3: 2006	Radio-Frequency, Electromagnetic Field	Pass	A
EN61000-4-4: 2004 AS/NZS 61000.4.4: 2006	Electrical Fast Transient/Burst	Pass	B
EN61000-4-5: 2006 AS/NZS 61000.4.5: 2006	Surge	Pass	B
EN61000-4-6: 1996/A1: 2001 AS/NZS 61000.4.6: 2006	Conductive Disturbance	Pass	A
EN61000-4-8: 1993/A1: 2001 AS/NZS 61000.4.8: 2002	Power Frequency Magnetic Field	Pass	A
EN61000-4-11: 2004 AS/NZS 61000.4.11: 2005	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

<to be continued>

Standard	Description	Results
EN61000-3-2: 2006 AS/NZS 61000.3.2: 2007	Limits for harmonics current emissions	Pass
EN61000-3-3: 1995/A1: 2001/A2:2005 AS/NZS 61000.3.3: 2006	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

Conforms to the Low Voltage Directive 2006/95/EC, 93/68/EEC as attested by conformity with the following harmonized standard:

EN60950-1: 2006: Safety of Information Technology Equipment Including electrical business equipment

*We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.*

-----  
QNAP Systems, Inc.

**Date: 2009/04/16**

## Declaration of Conformity

Name of Responsible Party: QNAP Systems, Inc.

Address of Responsible Party: 21F, No.77, Sec. 1, Xintai 5th Rd.  
Xizhi City, Taipei Country, 221  
Taiwan

Declares that product: Network Attached Storage

Model: TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP;  
VioStor-8024U-RP, and others (Please refer to the attachment )

Assembled by: Same as above  
Address: Same as above

Conforms to the C-Tick Mark requirement as attested by conformity with the following standards:

EN55022: 2006 / CISPR 22:2005; AS/NZS CISPR 22: 2006: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment. (\* Remarks: Testing radiated emissions above 1 GHz is not yet required in Australia.)  
EN55024: 1998/A1: 2001/A2: 2003; AS/NZS CISPR 24: 2002: Information technology equipment-Immunity characteristics-Limits and methods of measurement.

Standard	Description	Results	Criteria
EN61000-4-2: 1995/A1: 1998/A2: 2001 AS/NZS 61000.4.2: 2002	Electrostatic Discharge	Pass	B
EN61000-4-3: 2006 AS/NZS 61000.4.3: 2006	Radio-Frequency, Electromagnetic Field	Pass	A
EN61000-4-4: 2004 AS/NZS 61000.4.4: 2006	Electrical Fast Transient/Burst	Pass	B
EN61000-4-5: 2006 AS/NZS 61000.4.5: 2006	Surge	Pass	B
EN61000-4-6: 1996/A1: 2001 AS/NZS 61000.4.6: 2006	Conductive Disturbance	Pass	A
EN61000-4-8: 1993/A1: 2001 AS/NZS 61000.4.8: 2002	Power Frequency Magnetic Field	Pass	A
EN61000-4-11: 2004 AS/NZS 61000.4.11: 2005	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

<to be continued>

Standard	Description	Results
EN61000-3-2: 2006 AS/NZS 61000.3.2: 2007	Limits for harmonics current emissions	Pass
EN61000-3-3: 1995/A1: 2001/A2:2005 AS/NZS 61000.3.3: 2006	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

*We, QNAP Systems, Inc., hereby declare that the equipment bearing the trade name and model number specified above was tested conforming to the applicable Rules under the most accurate measurement standards possible, and that all the necessary steps have been taken and are in force to assure that production units of the same equipment will continue to comply with the requirements.*

-----  
QNAP Systems, Inc.

**Date: 2009/04/16**

# CE TEST REPORT

of

**EN55022 / CISPR 22 / AS/NZS CISPR 22  
Class B**

**EN55024 / AS/NZS CISPR 24 / IMMUNITY  
EN61000-3-2 / EN61000-3-3**

Product : **Network Attached Storage**

Model(s): **TS-809U-RP; VioStor-8040U-RP;  
VioStor-8032U-RP; VioStor-8024U-RP,  
and others (Please refer to the attachment )**

Applicant: **QNAP Systems, Inc.**

Address: **21F, No.77, Sec. 1, Xintai 5th Rd.  
Xizhi City, Taipei Country, 221  
Taiwan**

Test Performed by:

**International Standards Laboratory**

<HC LAB>

\*Site Registration No.

BSMI:SL2-IN-E-0037; SL2-R1/R2-E-0037; TAF: 1178;

IC: IC4067; VCCI: R-341,C-354, T-313; NEMKO: ELA 113A

\*Address:

No. 65, Gu Dai Keng St.

Hsichih, Taipei Hsien 22117, Taiwan

\*Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Report No.: **ISL-09HE104CE**

Issue Date : **2009/04/16**

## Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data .....	1
2.	Summary .....	2
2.1	Operation Environment .....	2
2.2	Test Standards .....	2
3.	Description of EUT.....	3
4.	Description of Support Equipment .....	5
4.1	Description of Support Equipment .....	5
4.2	Software for Controlling Support Unit.....	6
4.3	I/O Cable Condition of EUT and Support Units .....	7
5.	Power Main Port Conducted Emissions .....	8
5.1	Configuration and Procedure.....	8
5.1.1	EUT Configuration .....	8
5.1.2	Test Procedure .....	8
5.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	8
5.2	Conduction Test Data: Configuration 1 .....	9
5.3	Conduction Test Data: Configuration 2 .....	11
5.4	Conduction Test Data: Configuration 3 .....	13
5.5	Conduction Test Data: Configuration 4 .....	15
6.	Telecommunication Port Conducted Emissions .....	17
6.1	Configuration and Procedure.....	17
6.1.1	EUT Configuration .....	17
6.1.2	Test Procedure .....	17
6.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	17
6.2	Test Data: LAN 1--GIGA (Voltage) .....	18
6.3	Test Data: LAN 2--GIGA (Voltage) .....	19
6.4	Test Data: LAN 1--100M .....	20
6.5	Test Data: LAN 2--100M .....	21
6.6	Test Data: LAN 1--10M .....	22
6.7	Test Data: LAN 2--10M .....	23
7.	Radiated Disturbance Emissions .....	24
7.1	Configuration and Procedure.....	24
7.1.1	EUT Configuration .....	24
7.1.2	Test Procedure .....	24
7.1.3	Spectrum Analyzer Configuration (for the frequencies tested) .....	24
7.2	Radiation Test Data: Configuration 1 .....	25
7.3	Radiation Test Data: Configuration 2.....	27
7.4	Radiation Test Data: Configuration 3.....	29
7.5	Radiation Test Data: Configuration 4.....	31
8.	Electrostatic discharge (ESD) immunity .....	33
8.1	Electrostatic discharge (ESD) immunity test .....	33
9.	Radio-Frequency, Electromagnetic Field immunity.....	34
9.1	Radio-Frequency, Electromagnetic Field immunity test.....	34
10.	Electrical Fast transients/burst immunity .....	35
10.1	Electrical Fast transient/burst immunity test.....	35



11.	Surge Immunity .....	37
11.1	Surge immunity test .....	37
12.	Immunity to Conductive Disturbance .....	38
12.1	Immunity to Conductive Disturbance .....	38
13.	Power Frequency Magnetic Field immunity .....	39
13.1	Power Frequency Magnetic field immunity test .....	39
14.	Voltage Dips, Short Interruption and Voltage Variation immunity .....	40
14.1	Voltage Dips, Short Interruption and Voltage Variation immunity test .....	40
15.	Harmonics .....	41
15.1	Harmonics test .....	41
16.	Voltage Fluctuations .....	46
16.1	Voltage Fluctuations test .....	46
17.	Appendix .....	49
17.1	Appendix A: Measurement Procedure for Main Power Port Conducted Emissions	49
17.2	Appendix B: Measurement Procedure for Telecommunication Port Conducted Emissions .....	50
17.3	Appendix C: Test Procedure for Radiated Emissions .....	51
17.4	Appendix D: Test Equipment .....	52
17.4.1	Test Equipment List .....	52
17.5	Software for Controlling Spectrum/Receiver and Calculating Test Data .....	54
17.6	Appendix E: Layout of EUT and Support Equipment .....	55
17.6.1	General Power Main Port Conducted Test Configuration .....	55
17.6.2	General Telecommunication Port Conducted Emission Test Configuration .....	56
17.6.3	General Radiation Test Configuration .....	57
17.7	Appendix F: Uncertainty of Measurement .....	58
17.8	Appendix G: Photographs of EUT Configuration Test Set Up .....	59
17.8.1	Photo of Main Power Port Conducted Emission and Telecommunication Port Conducted Emission Measurement .....	59
17.8.2	Photo of Radiated Emission Measurement .....	63
17.8.3	Photo of ESD Measurement .....	65
17.8.4	Photo of RF Field Strength Susceptibility Measurement .....	65
17.8.5	Photo of Electrical Fast Transient/Burst Measurement .....	66
17.8.6	Photo of Surge Measurement .....	66
17.8.7	Photo of Conductive Measurement .....	67
17.8.8	Photo of Magnetic field Measurement .....	67
17.8.9	Photo of Voltage Dips Measurement .....	68
17.8.10	Photo of Harmonics and Voltage Fluctuations .....	68
17.9	Photographs of EUT Please refer to the File of ISL-09HE104P .....	69
18.	Attachment: .....	70

# 1. General

## 1.1 Certification of Accuracy of Test Data

**Standards:** Please refer to 2.2

**Equipment Tested:** Network Attached Storage

**Model:** TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP;  
VioStor-8024U-RP, and others (Please refer to the attachment )

**Applied by** QNAP Systems, Inc.


**Sample received Date:** 2009/04/15

**Final test Date :** 2009/04/15


**Test Site:** OATS 01; Conduction 01;  
HC Test Site

**Test Result:** PASS

**Report Engineer:** Lily L.C. Tseng

**Test Engineer:**   
Andy SH Chen

Approve & Signature



-----  
Jim Chu / Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 73 pages, including 1 cover page , 2 contents page, and 70 pages for the test description.

This test report accurately contains the test results of the above standards at the time of the test.

The results in this report apply only to the sample(s) tested.

This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory.

## 2. Summary

### 2.1 Operation Environment

<b>Test Distance</b>	10M (EMI test)
Temperature	refer to each site test data
Humidity:	refer to each site test data
<b>input power:</b>	Conduction input power: AC 230 V / 50 Hz Radiation input power: AC 230 V / 50 Hz Immunity input power: AC 230 V / 50 Hz

### 2.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the following

EN55022: 2006 / CISPR 22:2005; AS/NZS CISPR 22: 2006: Class B: Limits and methods of measurement of Radio Interference characteristics of Information Technology Equipment. (\* Remarks: Testing radiated emissions above 1 GHz is not yet required in Australia.)  
EN55024: 1998/A1: 2001/A2: 2003; AS/NZS CISPR 24: 2002: Information technology equipment-Immunity characteristics-Limits and methods of measurement.

Standard	Description	Results	Criteria
EN61000-4-2: 1995/A1: 1998/A2: 2001 AS/NZS 61000.4.2: 2002	Electrostatic Discharge	Pass	B
EN61000-4-3: 2006 AS/NZS 61000.4.3: 2006	Radio-Frequency, Electromagnetic Field	Pass	A
EN61000-4-4: 2004 AS/NZS 61000.4.4: 2006	Electrical Fast Transient/Burst	Pass	B
EN61000-4-5: 2006 AS/NZS 61000.4.5: 2006	Surge	Pass	B
EN61000-4-6: 1996/A1: 2001 AS/NZS 61000.4.6: 2006	Conductive Disturbance	Pass	A
EN61000-4-8: 1993/A1: 2001 AS/NZS 61000.4.8: 2002	Power Frequency Magnetic Field	Pass	A
EN61000-4-11: 2004 AS/NZS 61000.4.11: 2005	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN61000-3-2: 2006 AS/NZS 61000.3.2: 2007	Limits for harmonics current emissions	Pass
EN61000-3-3: 1995/A1: 2001/A2:2005 AS/NZS 61000.3.3: 2006	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

### 3. Description of EUT

#### EUT

Description:	Network Attached Storage
Condition:	Pre-Production
Model:	<b>TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP; VioStor-8024U-RP, and others (Please reference the attachment )</b>
Serial Number:	N/A
Power Supply Type:	ETASIS (Model: EFRP-M300) *2 & EFRP-M2300 * 1 AC INPUT: 100~240V 5-2.5A, 47~63Hz DC OUTPUT: +5V 20A +3.3V 20A +12V 22A -12V 0.8A +5VSB 3A +5V AND +3.3V 25A 300W (MAX). EMACS (Model: P1S2-2300V-R) *2 AC INPUT: 100~240V 47-63Hz 4.5-2A DC OUTPUT: 300W(MAX) +5V 0-20A +12V 24A +3.3V 0-20A -12V 0-0.5A +5VSB 0-2.5A +5V AND +3.3V TOTAL Max: 140W
CPU:	Intel Core 2 DUO E7400 2.8GHz FSB: 1066
DIMM Memory:	Transcend (Model: 517488-5207) 2GB DDR2-667MHz
ATA Disk Chip:	ADC II
Power Switch Button:	one
USB 2.0 Port:	four (4-pins)
Serial Port:	one (9-pins)
D-SUB Port:	one (15-pins)
RJ45 Connector:	two (8-pins) (10/100/1000Mbps)
Hard Disk1:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk2:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk3:	Seagate (Model:ST3500320AS) 500GB (Option)
Hard Disk4:	Seagate (Model:ST3500320AS) 500GB (Option)

Hard Disk5: Seagate (Model:ST3500320AS) 500GB  
(Option)  
Hard Disk6: Seagate (Model:ST3500320AS) 500GB  
(Option)  
Hard Disk7: Seagate (Model:ST3500320AS) 500GB  
(Option)  
Hard Disk8: Seagate (Model:ST3500320AS) 500GB  
(Option)

All types of EUT Connect have been tested. The worst data listed in this test report.

Test Configuration:

Test Mode:

Mode	Hard Disk	LAN1	LAN2	Power Supply
1	Seagate (Model:ST3500320AS ) 500GB *8	1000Mbps	1000Mbps	ETASIS (Model:EFRP-M300)* 2
2	Seagate (Model:ST3500320AS ) 500GB *8	1000Mbps	1000Mbps	ETASIS (Model:EFRP-M300)*1
3	Seagate (Model:ST3500320AS ) 500GB *8	1000Mbps	1000Mbps	EMACS (Model: P1S2-2300V-R)*2
4	Seagate (Model:ST3500320AS ) 500GB *8	1000Mbps	1000Mbps	EMACS (Model: P1S2-2300V-R)*1

**EMI Noise Source**

Crystal:14.318MHz (X1), 25MHz (X2), 25MHz (X3)

Clock Generator: ICS 954128AFLF (U11), 25MHz (Y1),4MHz(Y1)

**EMI Solution:**

N/A

## 4. Description of Support Equipment

### 4.1 Description of Support Equipment

Unit	Model Serial No.	Brand	Power Cord	FCC ID
Notebook Personal Computer	Latitude D400 S/N: N/A	DELL	Non-shielded, Detachable	FCC DOC
17" LCD Monitor	VA703B	View Sonic	Non-shielded, Detachable	FCC DOC
Rack mountable Switch	DGS-1008D	D-Link	Non-shielded, Detachable	FCC DOC
External HDD Enclosure*4	OT-201 S/N: NA	A-TEC	N/A	FCC DOC

#### 4.2 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

- A. Read and write to the disk drives.
- B. R/W External Hard Disk from USB Port.
- C. Send signal from EUT to server through LAN port.
- D. Repeat the above steps..

	Filename	Issued Date
LAN	Tfgen.exe	06/23/1999
EUT Hard Disk	InterEMC.exe	5/21/1996
External Hard Disk	InterEMC.exe	5/21/1996

### 4.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to EUT SPS	1.8M	Non-shielded, Detachable	Plastic Head
LAN Data Cable	Server to Switch RJ 45 Connector	33 feet	Non-shielded, Detachable	RJ-45, with Plastic Head
LCD Monitor Data Cable	LCD Monitor D-Sub Port to EUT D-Sub Port	1.88M	Non-shielded, Detachable	Metal Head Plastic Head
LAN Data Cable*2	EUT RJ 45 Connector to Switch RJ 45 Connector.	2.0M	Non-shielded, Detachable	RJ-45, with Plastic Head
USB Data Cable*4	External HDD Enclosure USB Port to EUT USB Port	0.98M	Non-shielded, Detachable (With Core)	Metal Head
Serial Data Cable	EUT Serial Port to PC Serial Port	5.0M	Shielded, Detachable	Metal Head



## 5. Power Main Port Conducted Emissions

### 5.1 Configuration and Procedure

#### 5.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall was 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit of standards used.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms impedance termination was connected to the test instrument. The excess length of the power cord was folded back and forth at the center of the lead to form a bundle 30cm to 40cm in length.

Any changes made to the configuration or modifications made to EUT during testing, are noted in the following test record.

If EUT has an extra auxiliary AC outlet which can provide power to an external monitor, all measurements will be made with the monitor power from EUT-mounted AC outlet and then from floor-mounted AC outlet.

#### 5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on both hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.


The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

#### 5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

## 5.2 Conduction Test Data: Configuration 1

Table 5.2.1 Power Line Conducted Emissions (Hot)

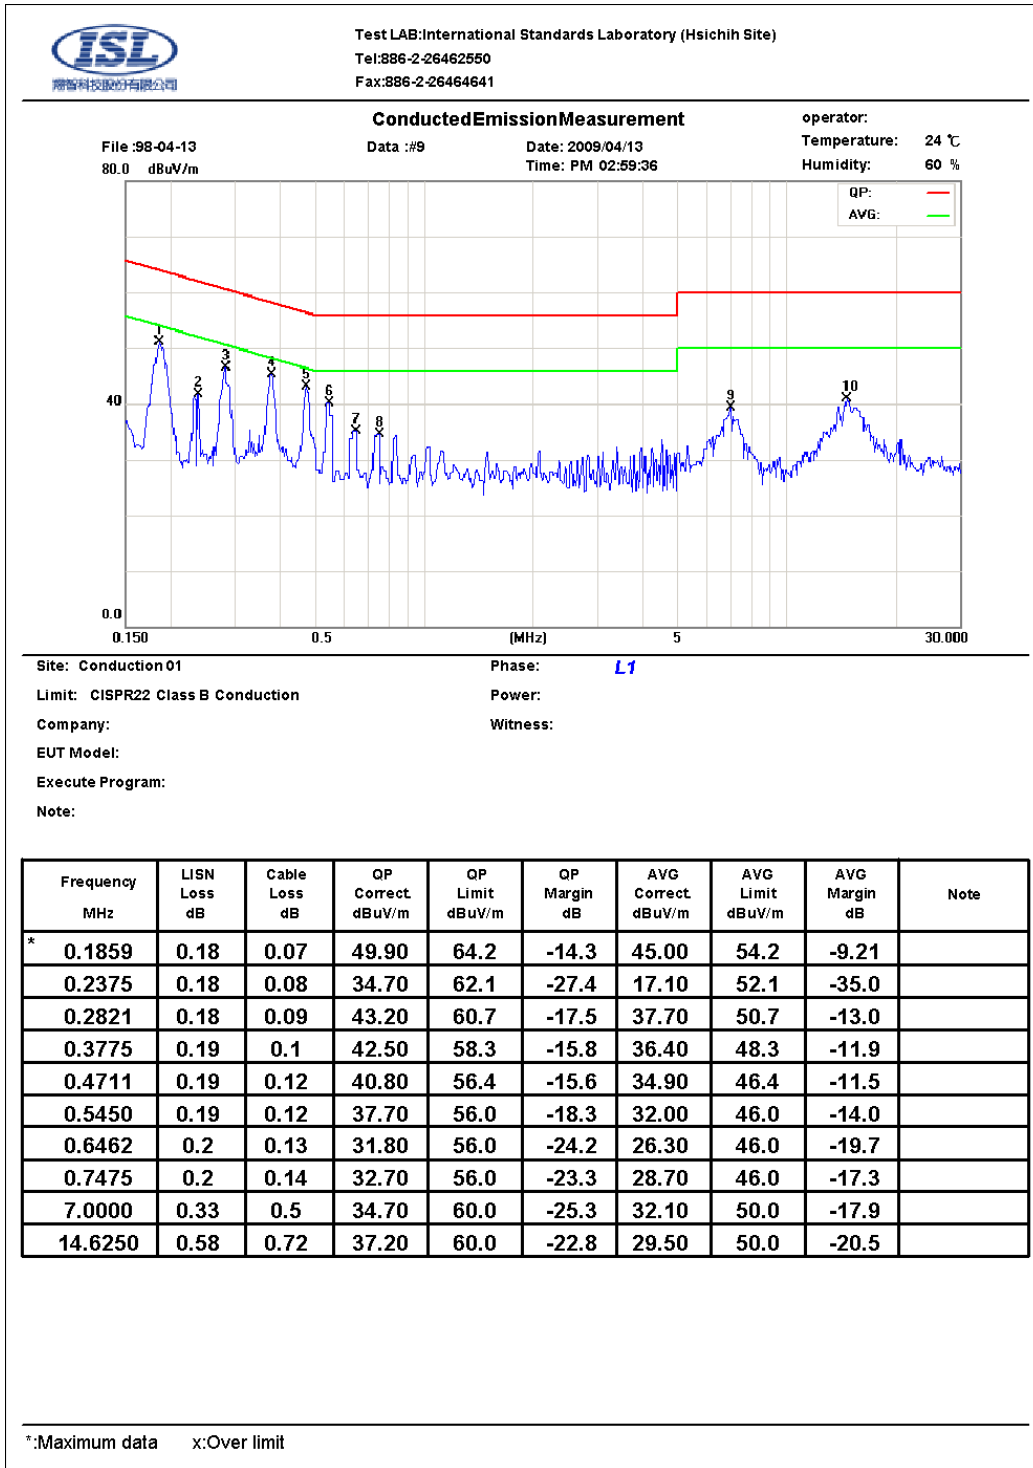

Note:

Margin = Corrected Amplitude - Limit


Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

**If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.**

**Table 5.2.2 Power Line Conducted Emissions (Neutral)**

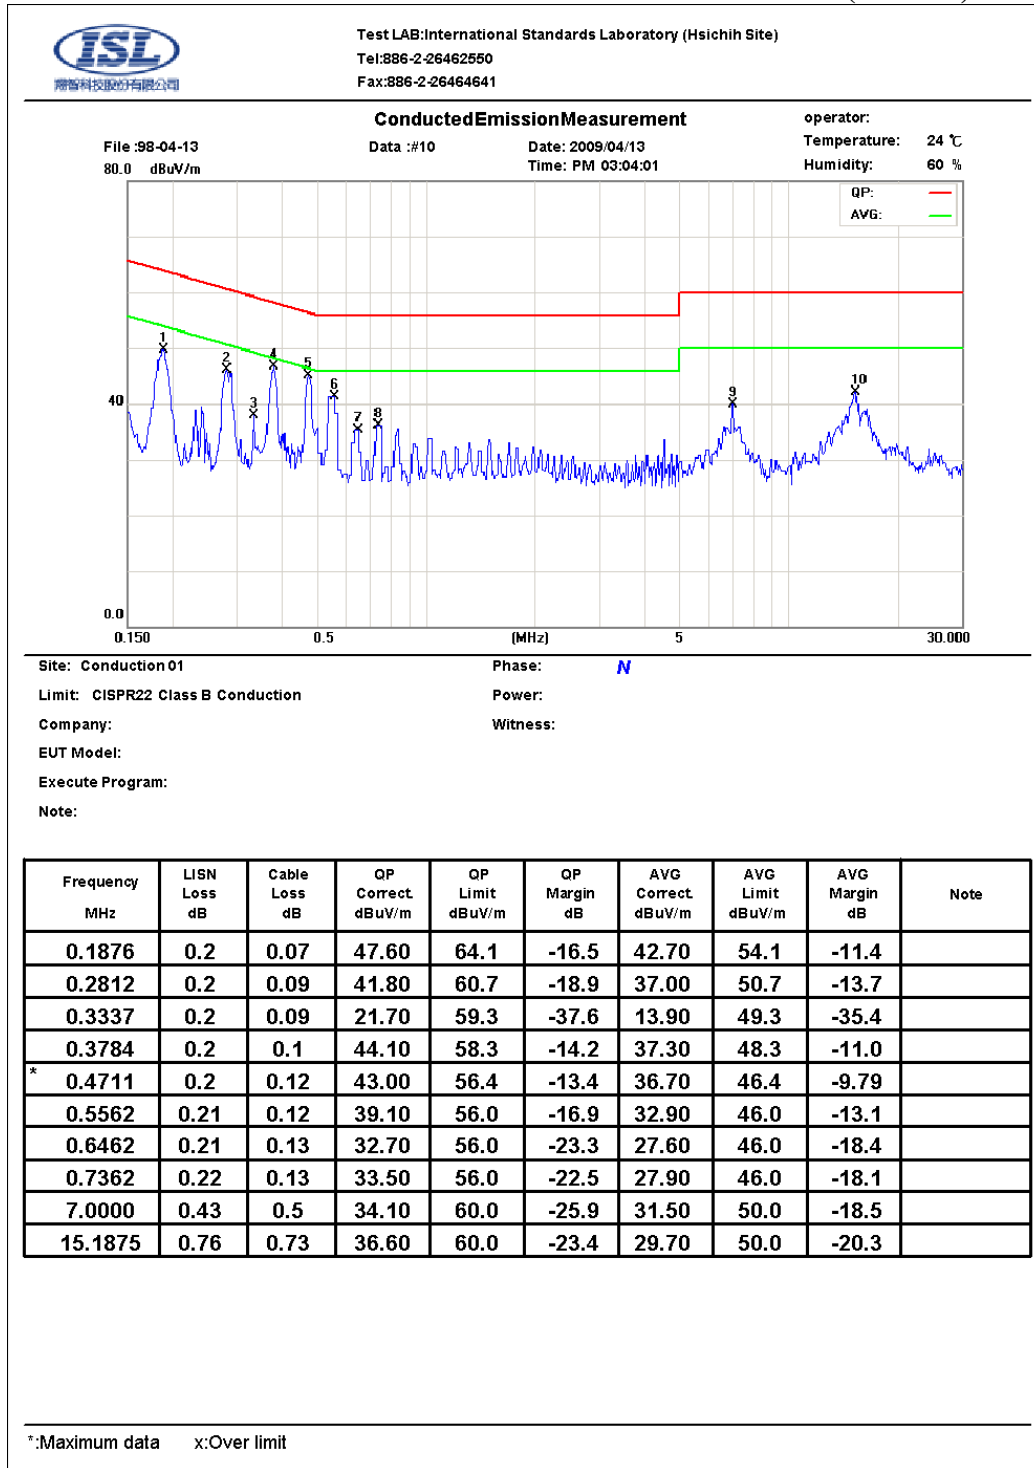

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 5.3 Conduction Test Data: Configuration 2

Table 5.3.1 Power Line Conducted Emissions (Hot)

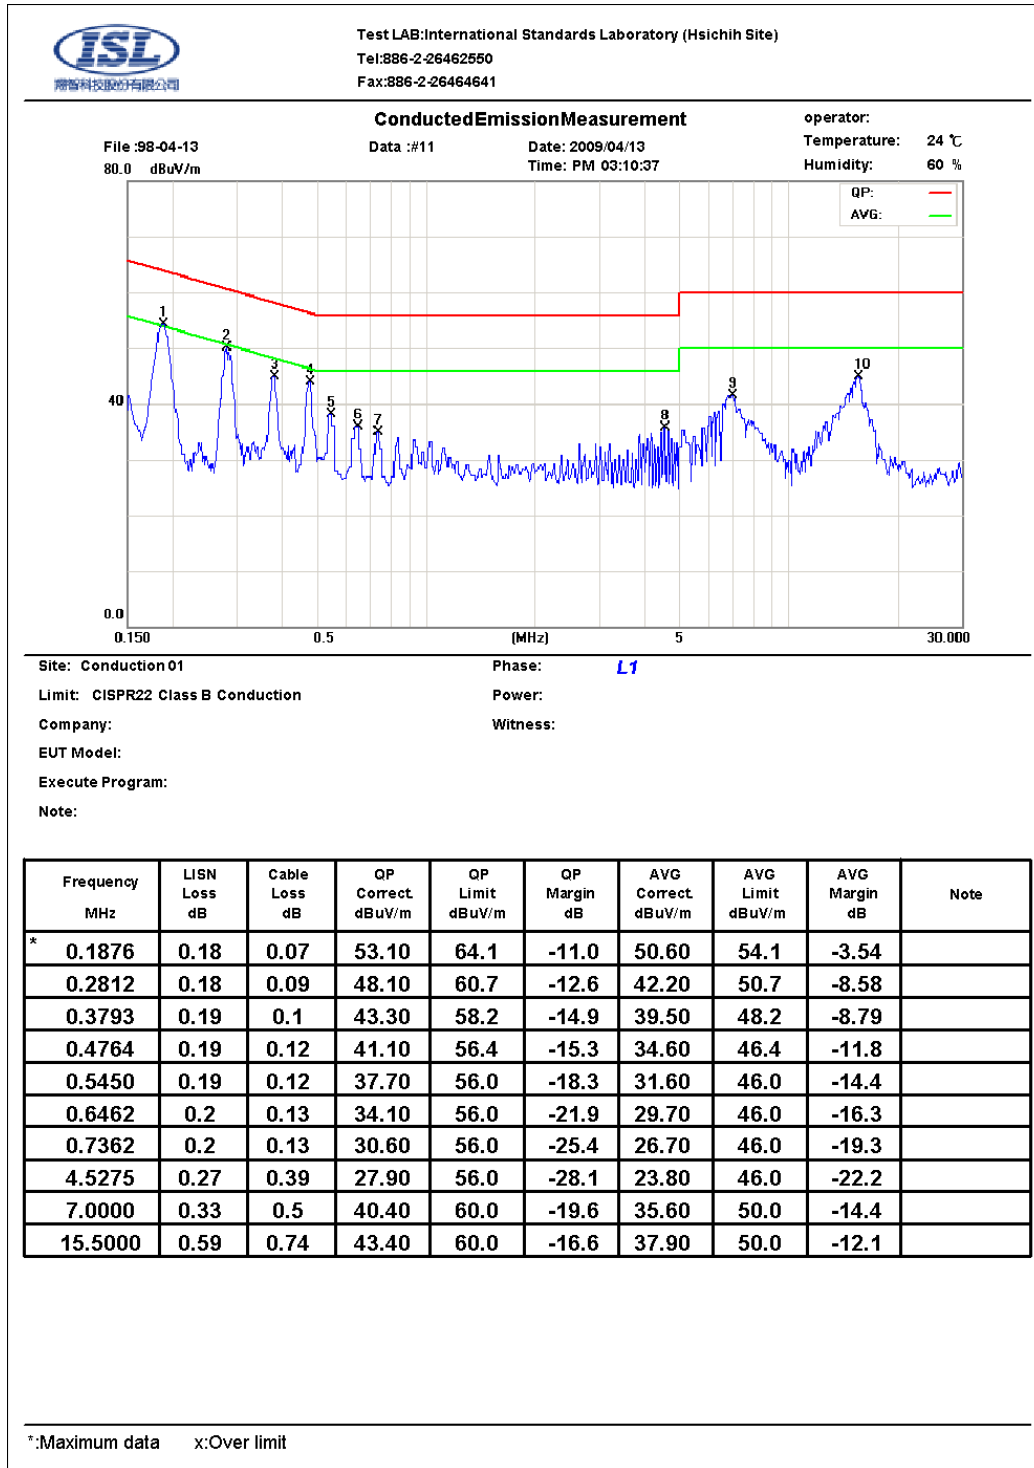

Note:

Margin = Corrected Amplitude - Limit


Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

**If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.**

**Table 5.3.2 Power Line Conducted Emissions (Neutral)**

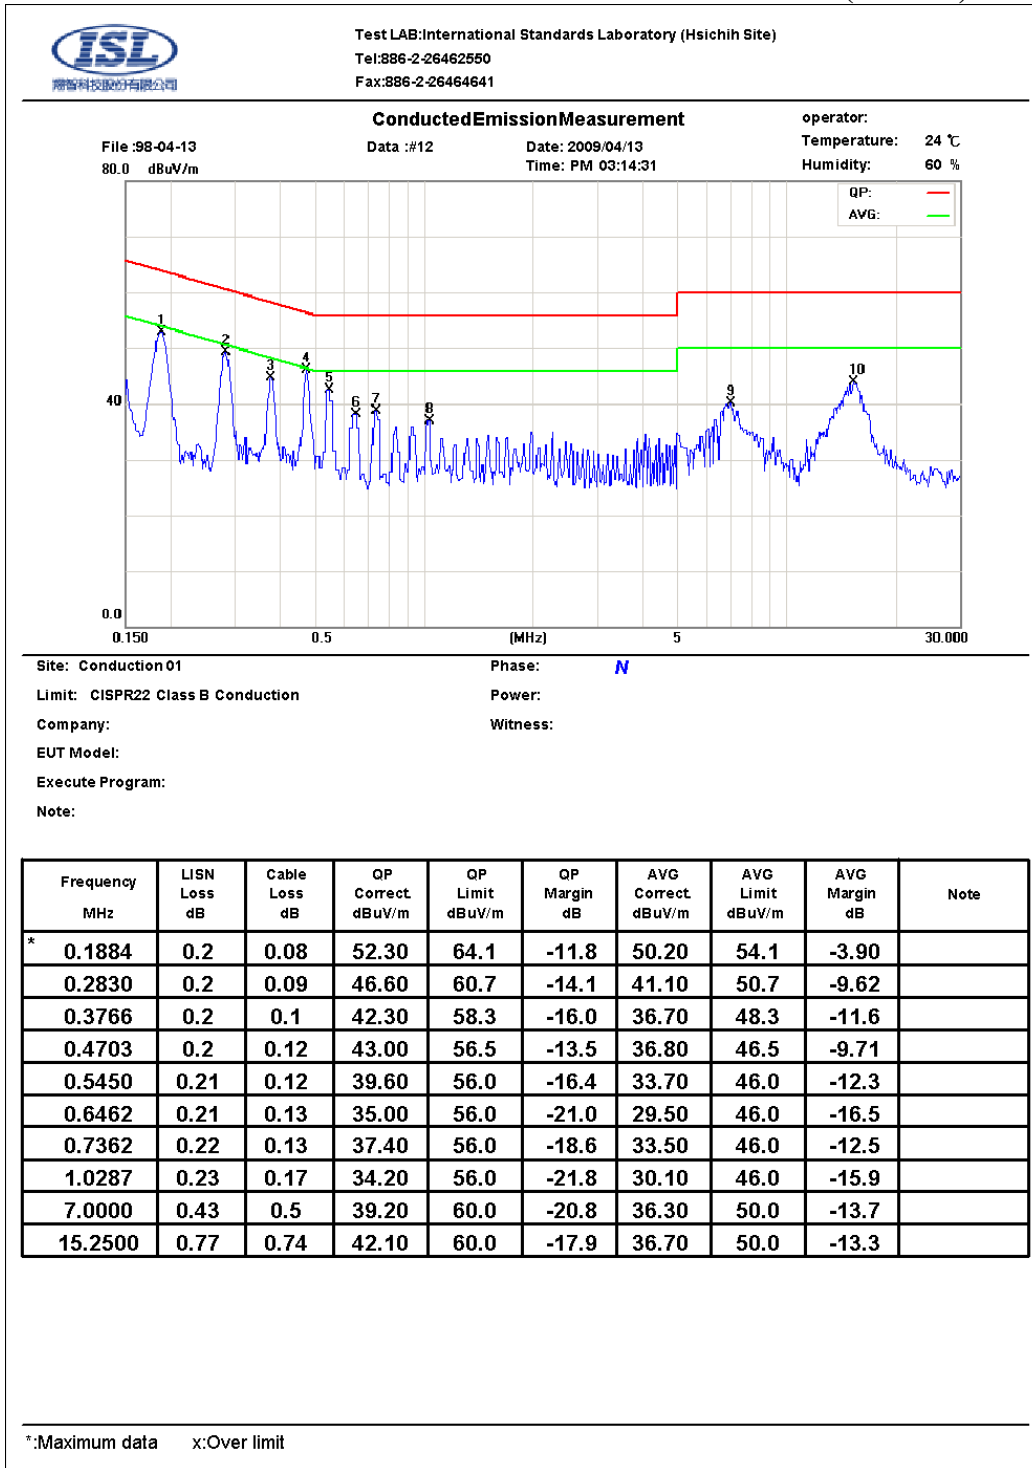

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 5.4 Conduction Test Data: Configuration 3

Table 5.4.1 Power Line Conducted Emissions (Hot)

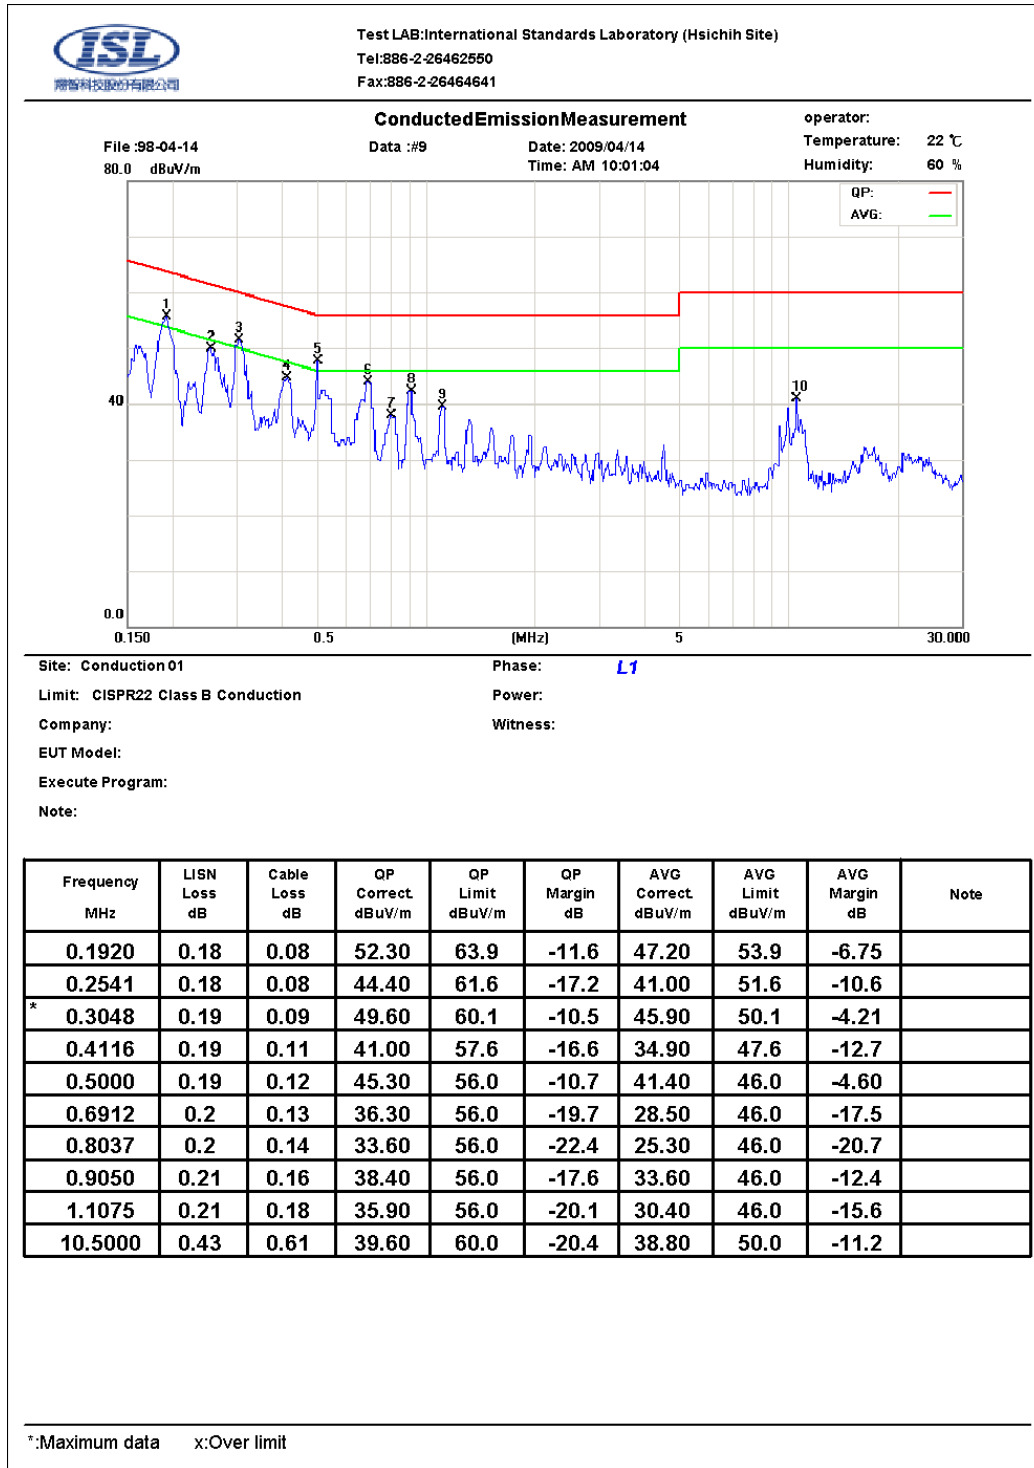

Note:

Margin = Corrected Amplitude - Limit


Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

**If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.**

**Table 5.4.2 Power Line Conducted Emissions (Neutral)**

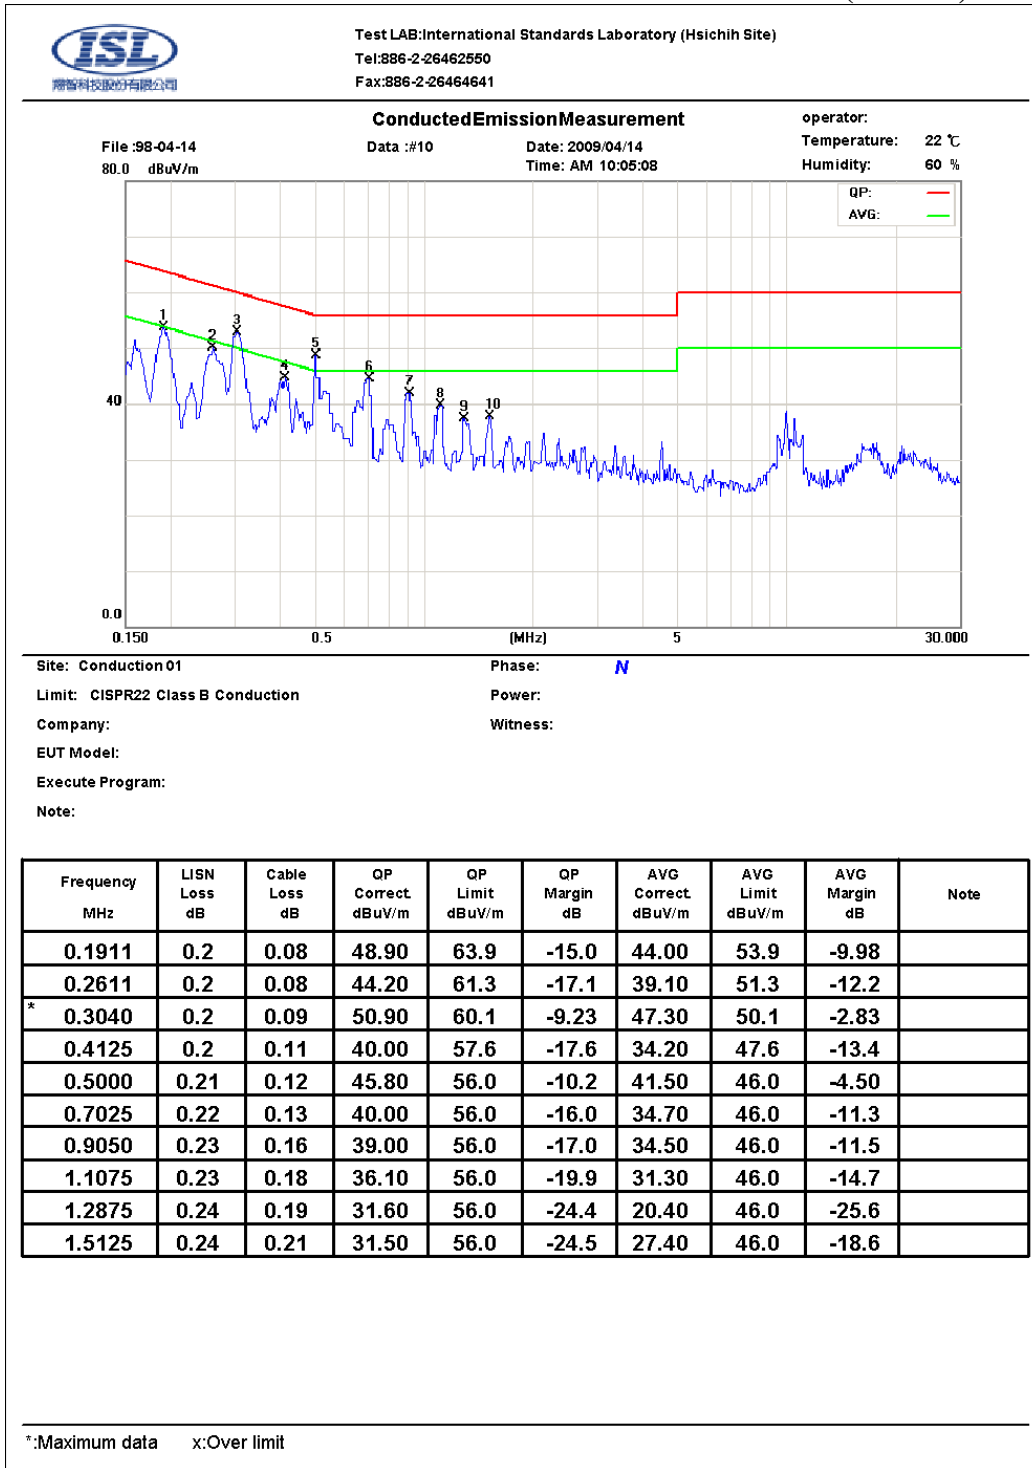

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 5.5 Conduction Test Data: Configuration 4

Table 5.5.1 Power Line Conducted Emissions (Hot)

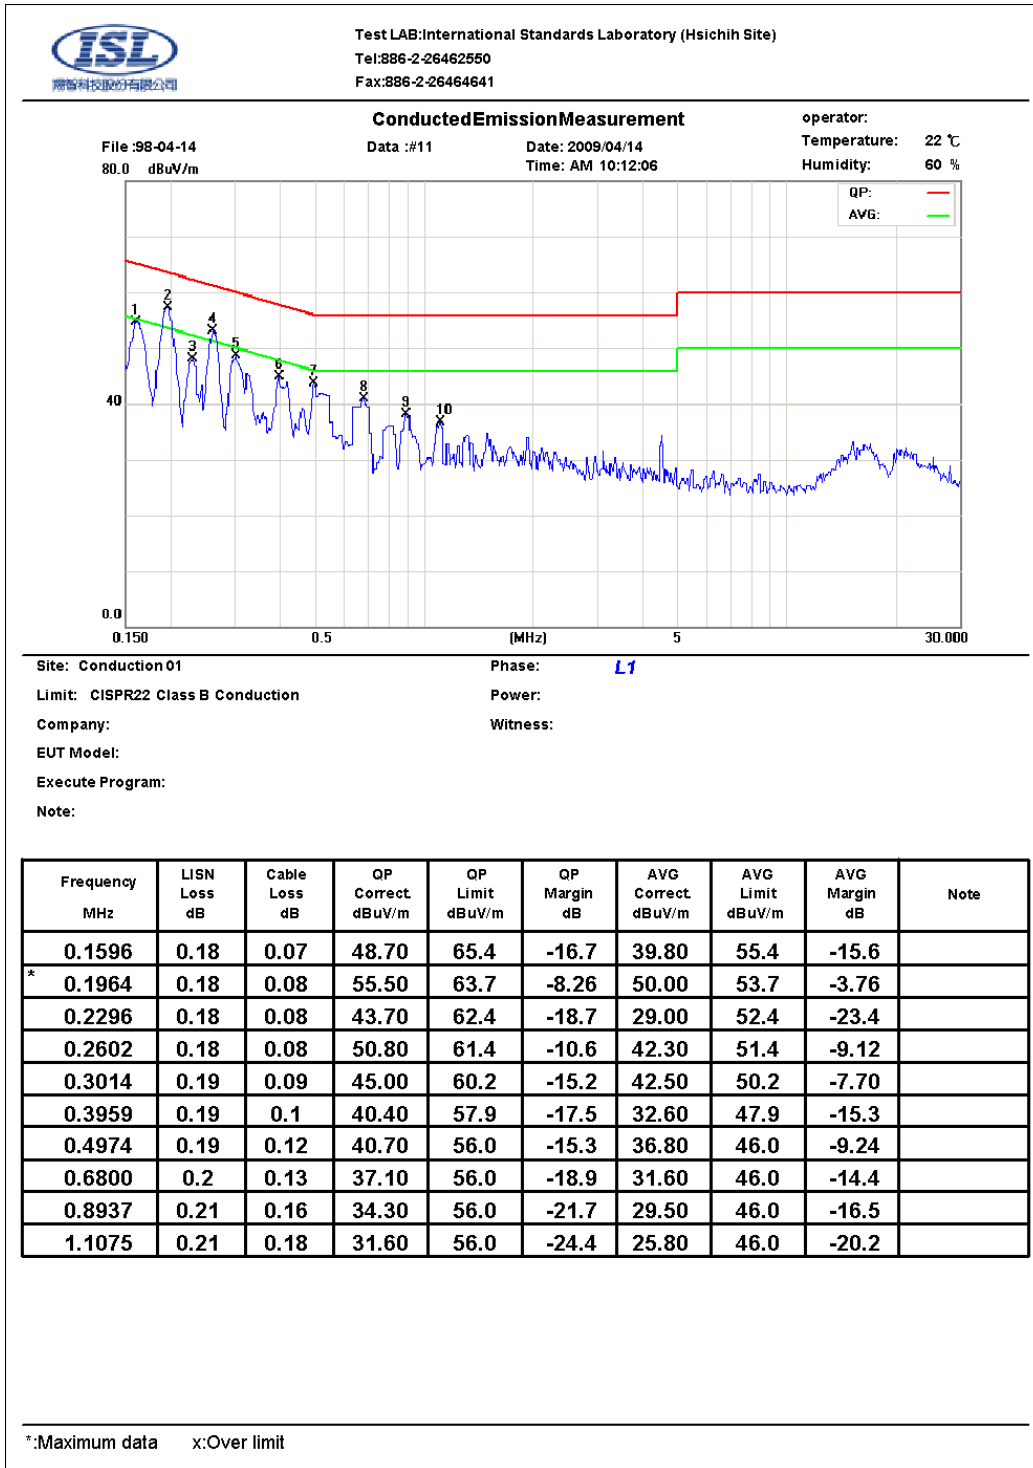

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

**The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.**

**If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.**



**Table 5.5.2 Power Line Conducted Emissions (Neutral)**

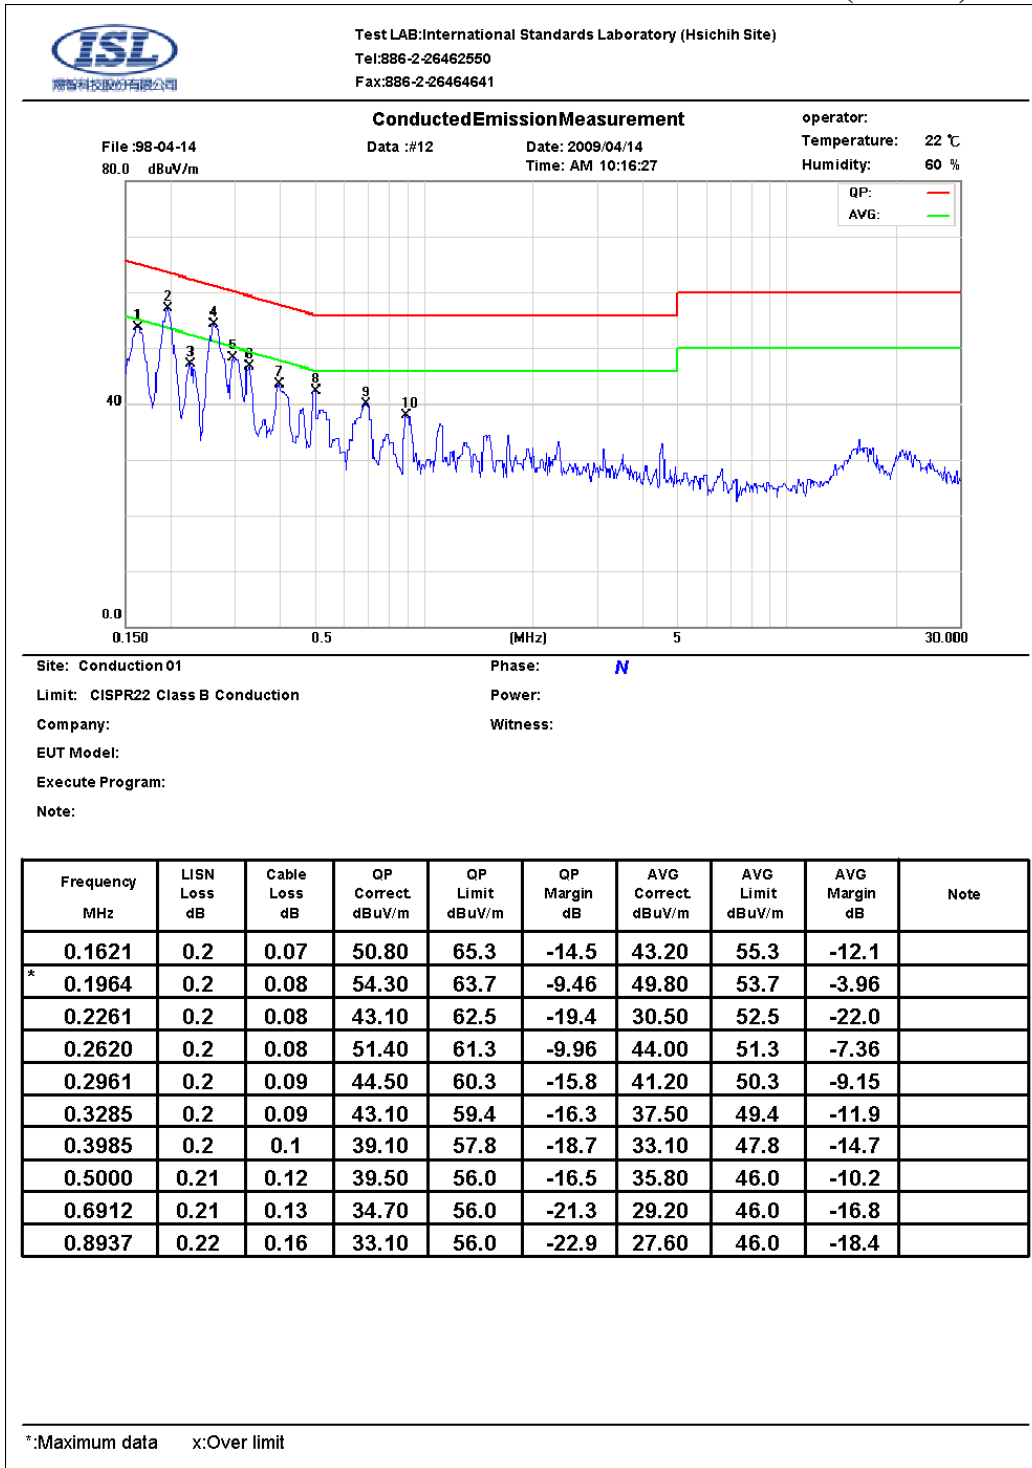

Note:

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

## 6. Telecommunication Port Conducted Emissions

### 6.1 Configuration and Procedure

#### 6.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall was 40cm to the rear of the EUT. The excess length of the power cord was folded back and forth at the center of the lead to form a bundle 30cm to 40cm in length. The distance between EUT and CDN is 80cm. CDN is connected to the reference ground plane. Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

#### 6.1.2 Test Procedure


The system was set up as described above, with the EMI diagnostic software running. The content of the software consist of both periodic and pseudo-random messages. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission. The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

#### 6.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150KHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9KHz

6.2 Test Data: LAN 1--GIGA (Voltage)

Table 6.2.1 Telecommunication Port Conducted Emission

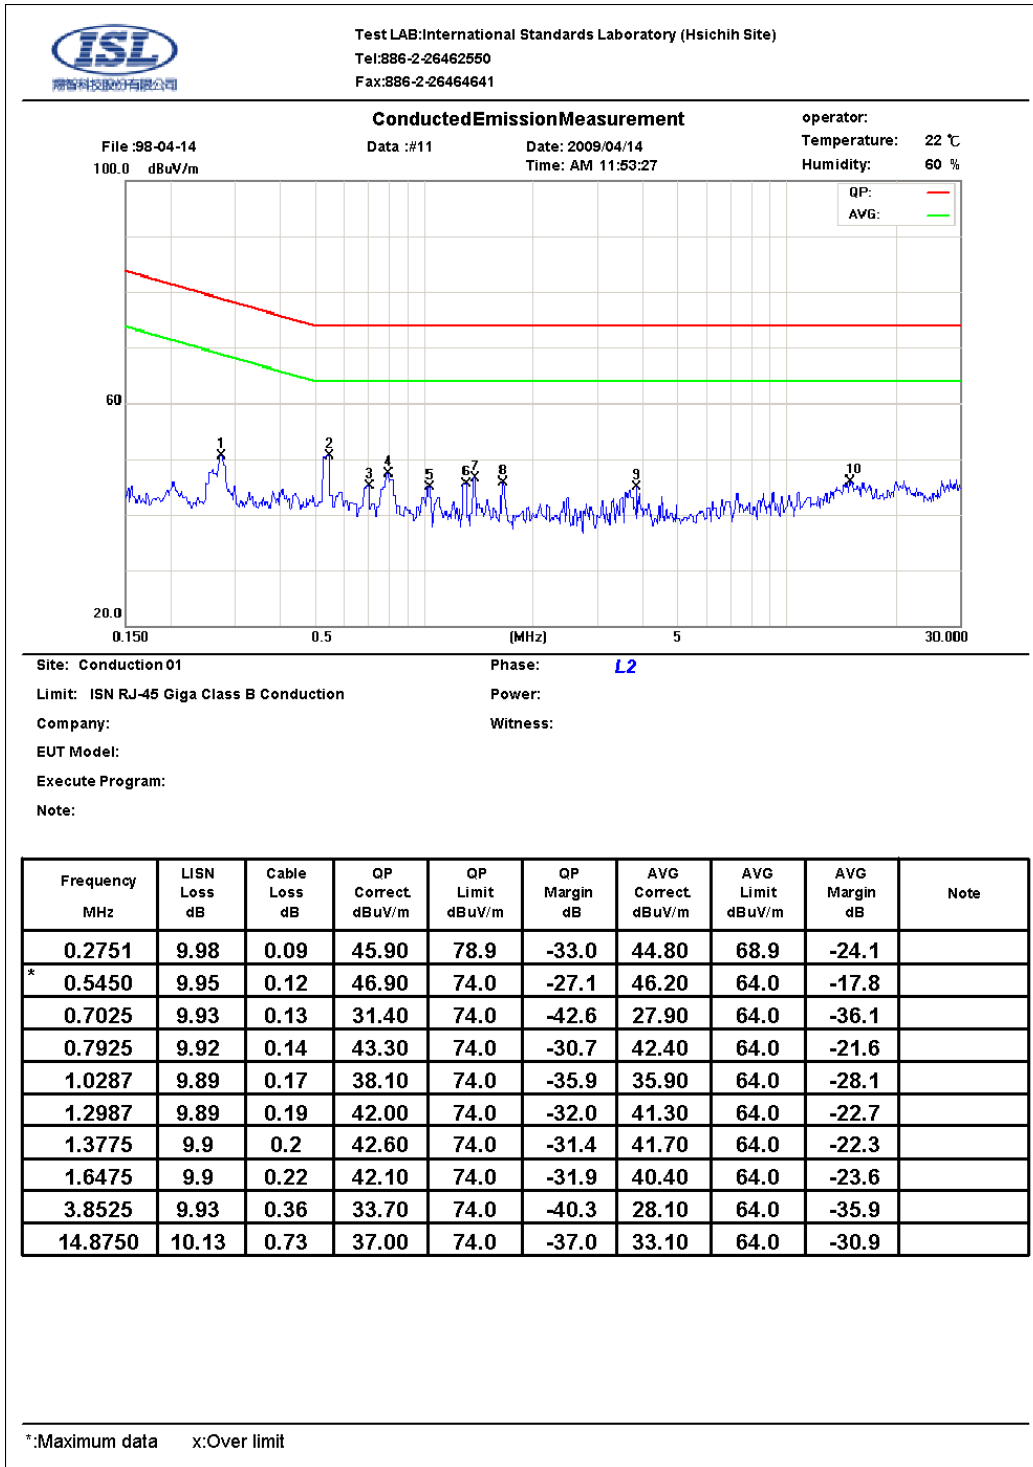

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

### 6.3 Test Data: LAN 2--GIGA (Voltage)

Table 6.3.1 Telecommunication Port Conducted Emission

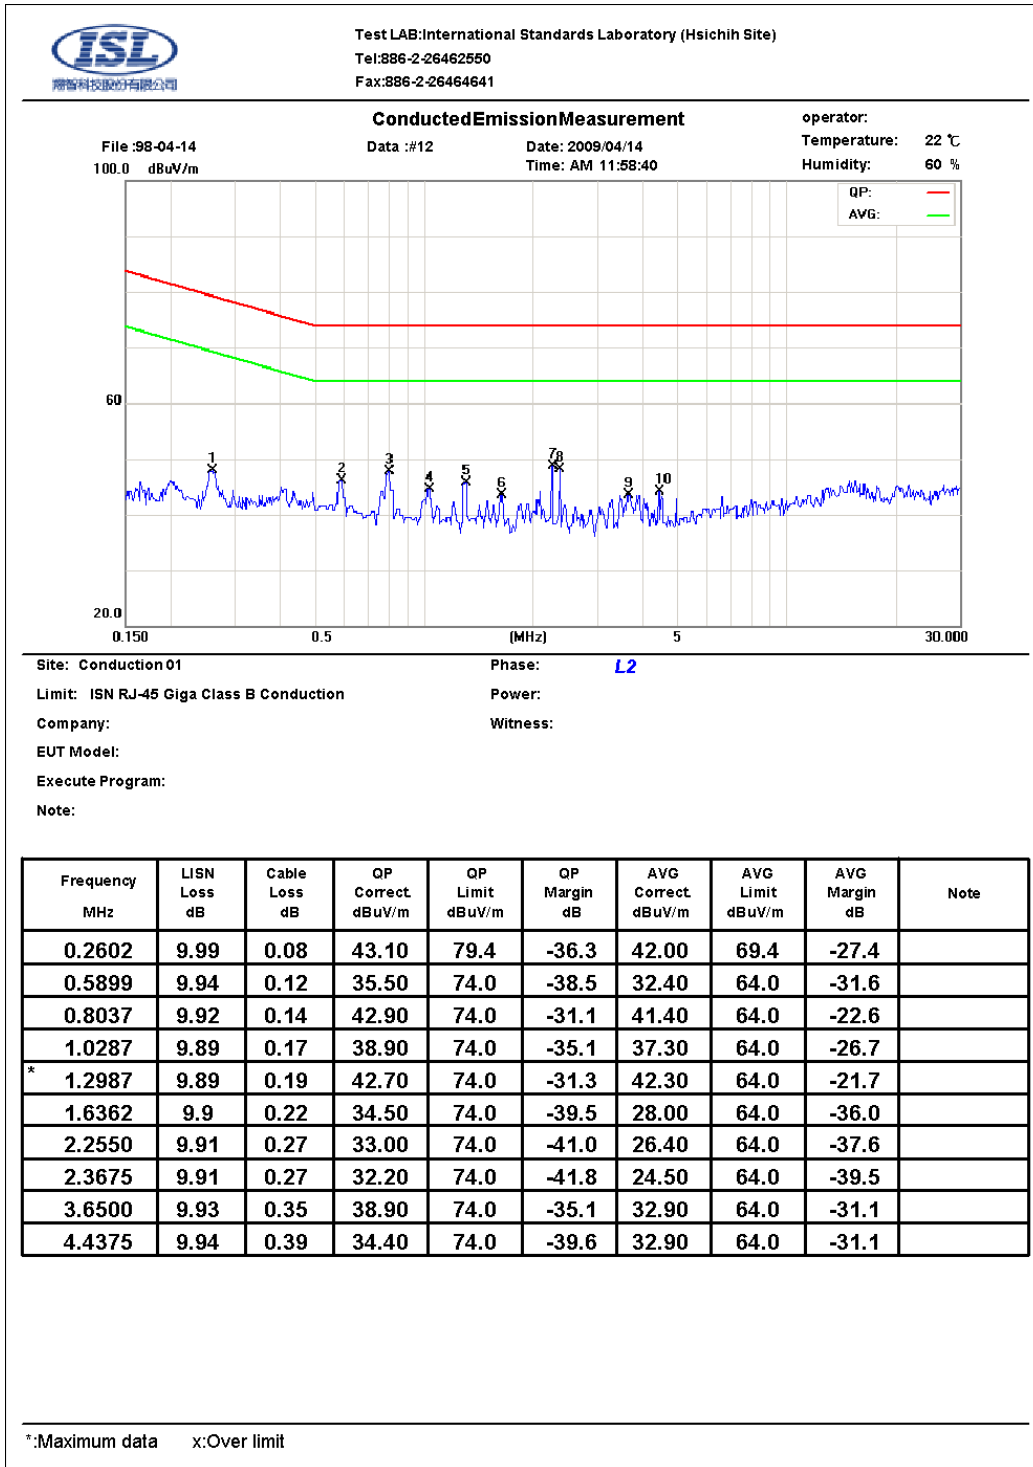

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

6.4 Test Data: LAN 1--100M

Table 6.4.1 Telecommunication Port Conducted Emission

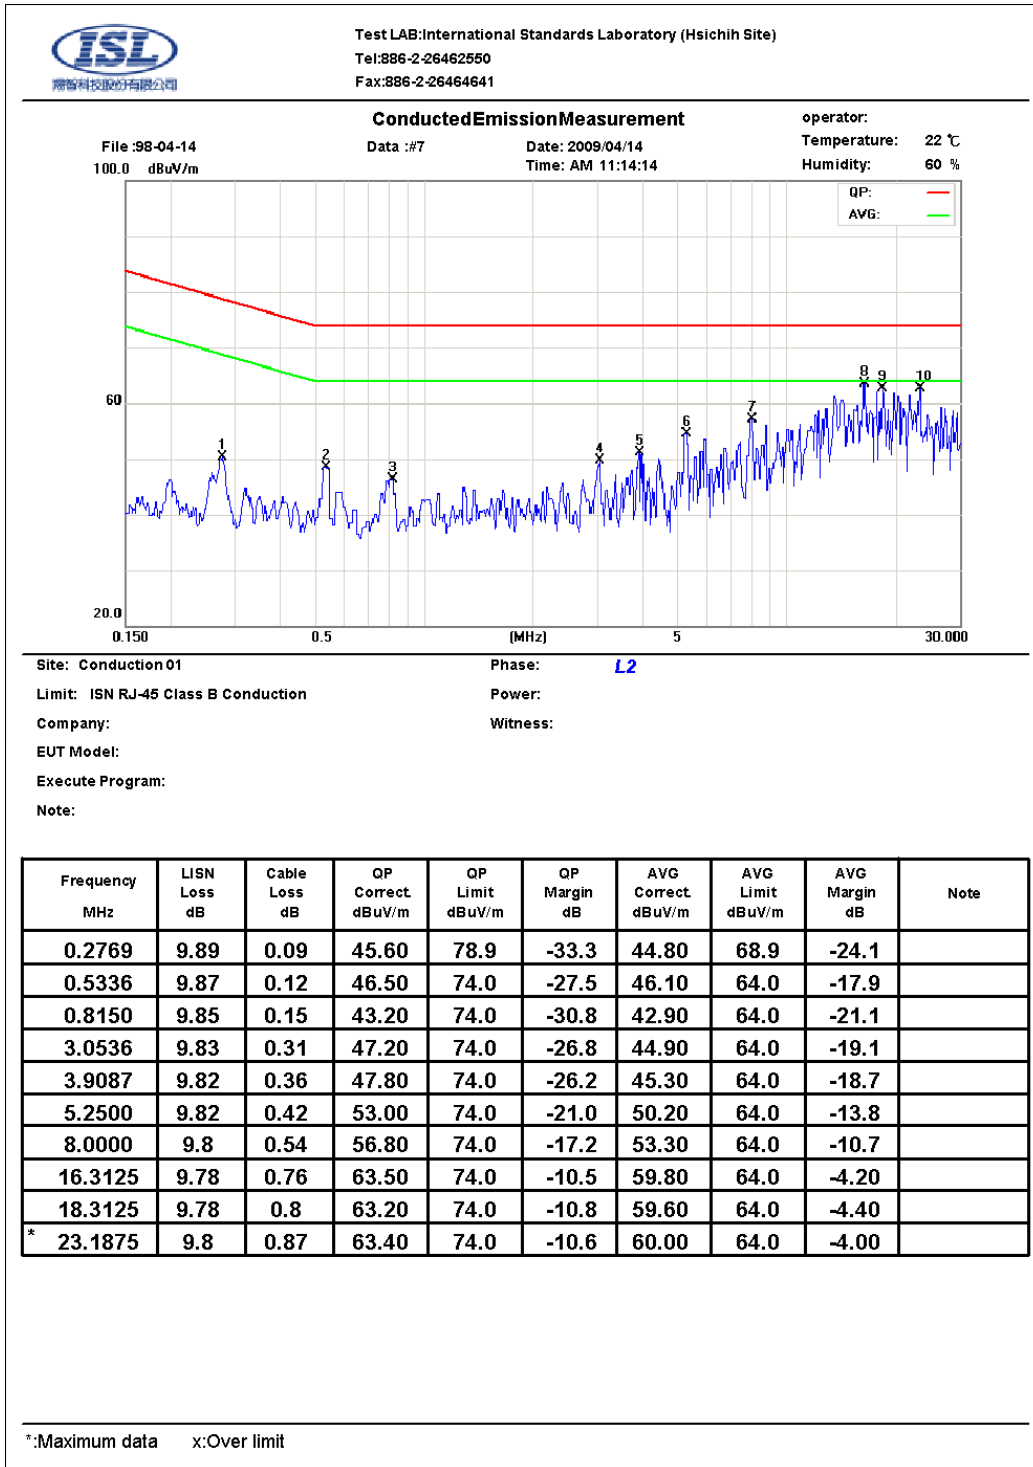

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

6.5 Test Data: LAN 2--100M

Table 6.5.1 Telecommunication Port Conducted Emission

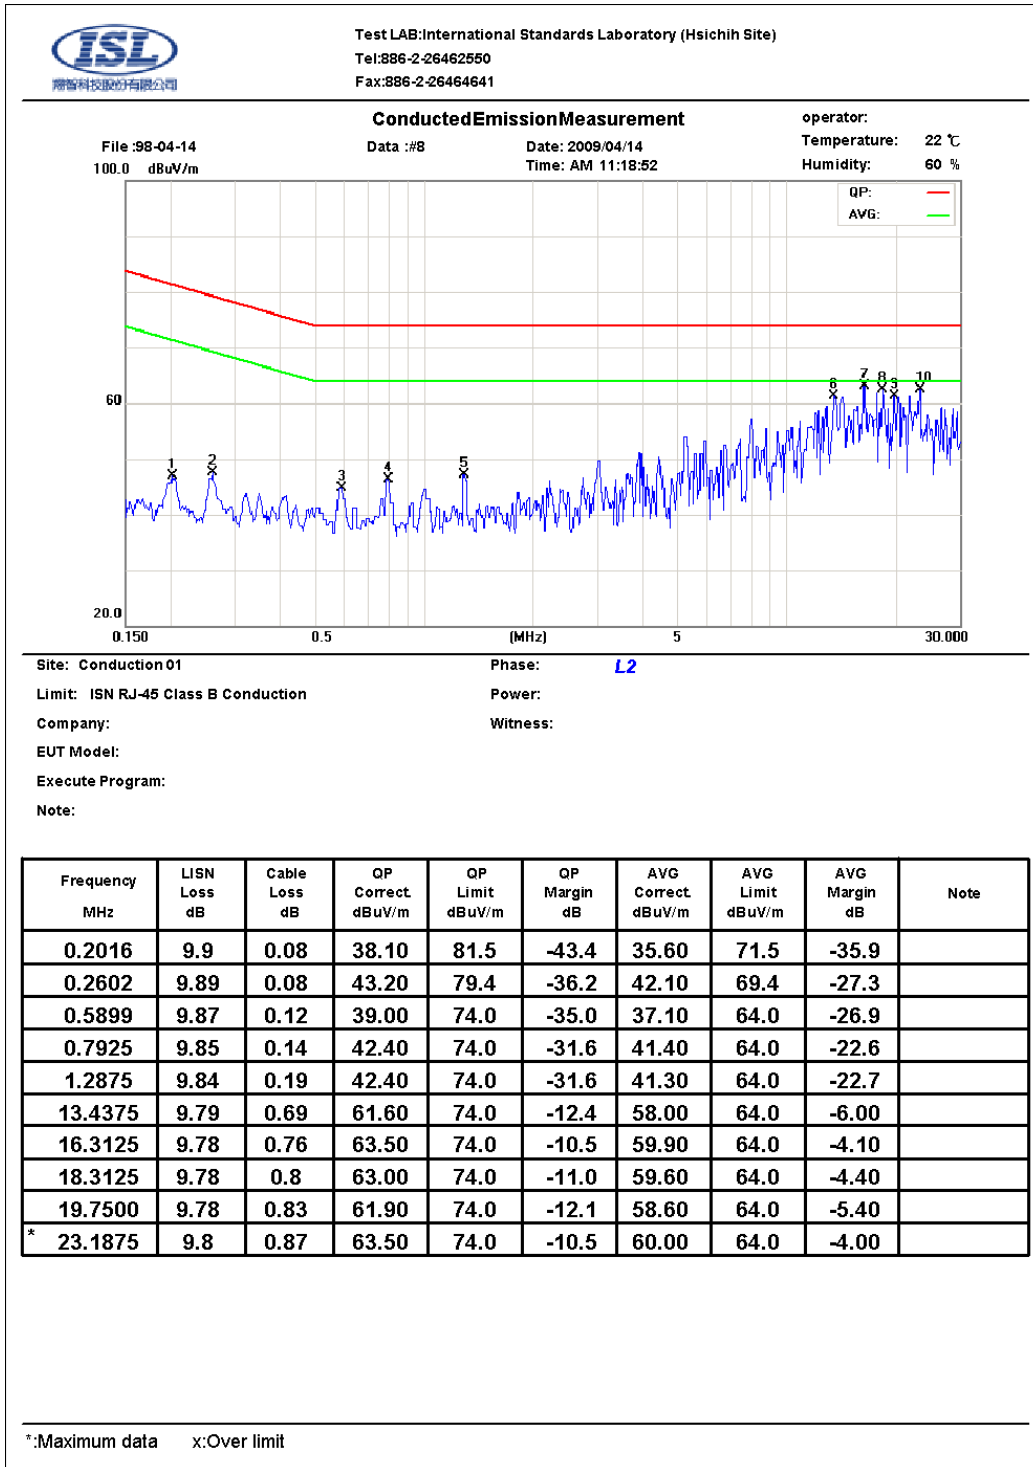

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

6.6 Test Data: LAN 1--10M

Table 6.6.1 Telecommunication Port Conducted Emission

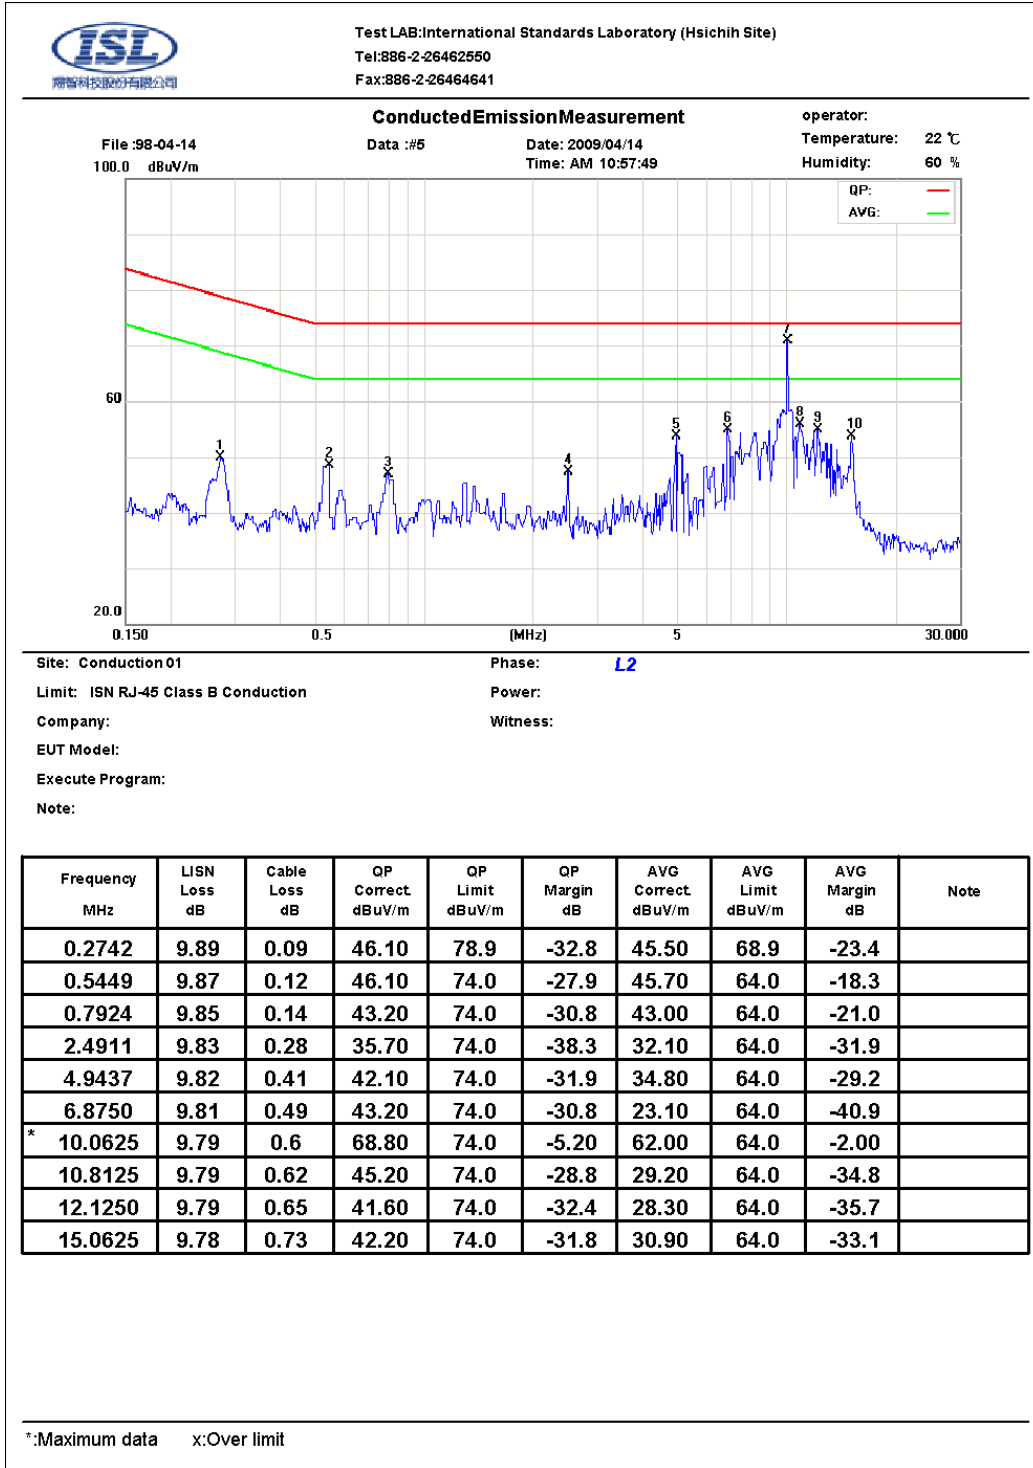

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss


A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

6.7 Test Data: LAN 2--10M

Table 6.7.1 Telecommunication Port Conducted Emission

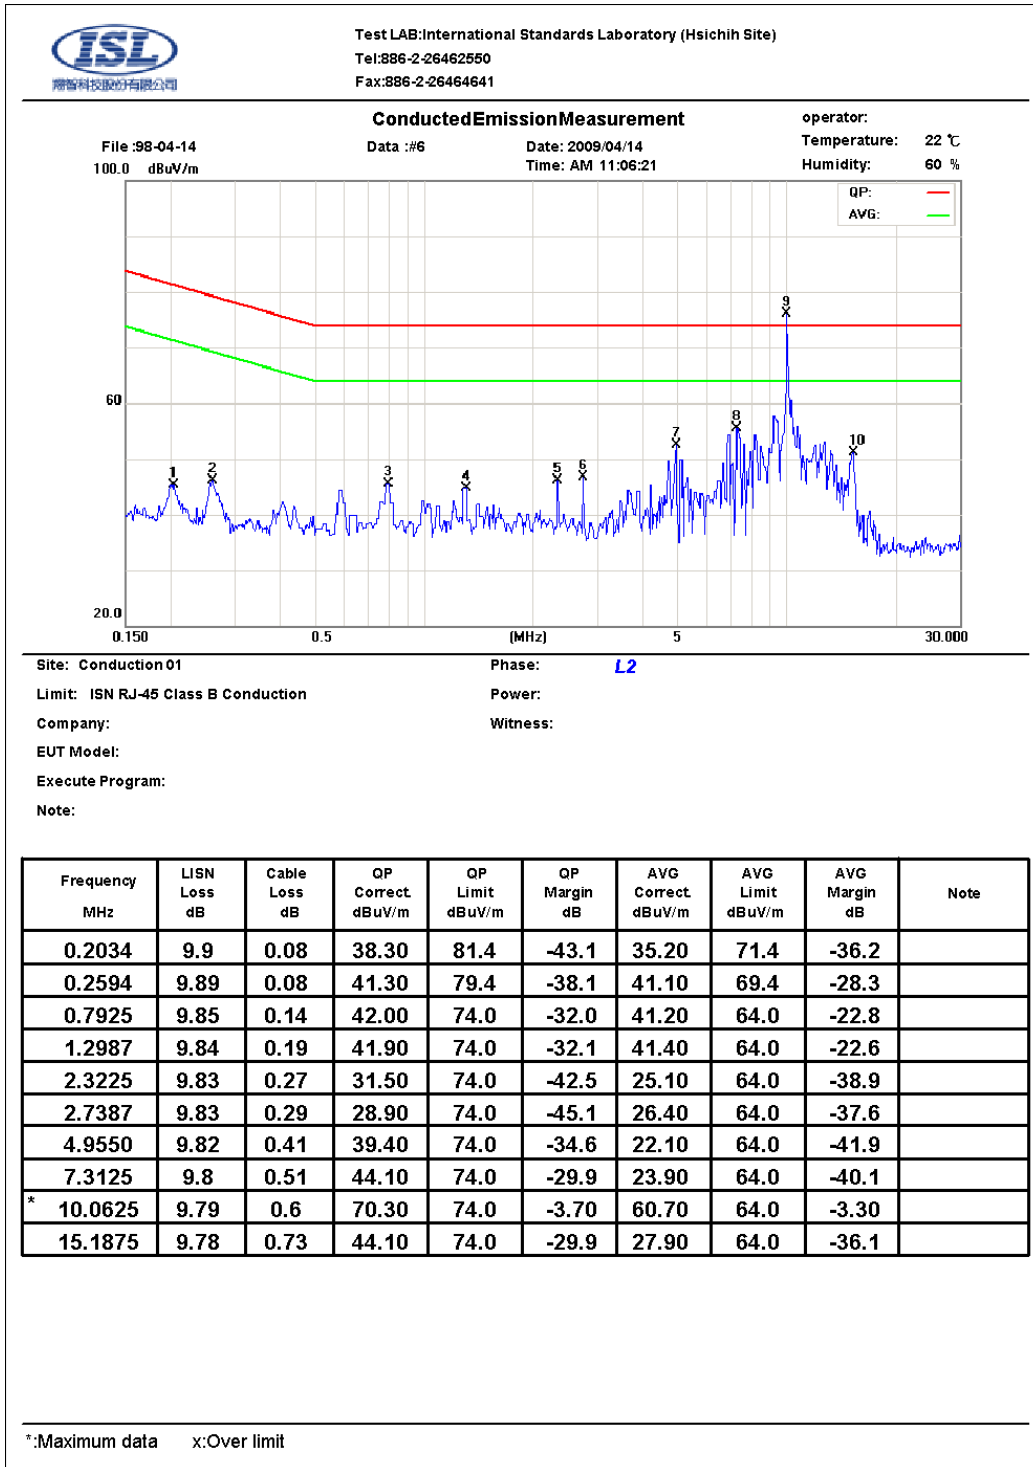

**Note :**

Margin = Corrected Amplitude - Limit

Corrected Amplitude = Receiver Reading + LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.



## 7. Radiated Disturbance Emissions

### 7.1 Configuration and Procedure

#### 7.1.1 EUT Configuration

The equipment under test was set up on a non-conductive table 80cm above ground, on open field or chamber. The excess length of the power cord was folded back and forth at the center of the lead to form a bundle 30cm to 40cm in length. Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If EUT has an extra auxiliary AC outlet which can provide power to an external monitor, all measurements will be made with the monitor power from EUT-mounted AC outlet and then from floor-mounted AC outlet.

#### 7.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The maximum emission was measured by varying the height of antenna and then by rotating the turntable. Both polarization of antenna, horizontal and vertical, were measured.


The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

#### 7.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	30MHz--1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120KHz

## 7.2 Radiation Test Data: Configuration 1

### Table 7.2.1 Radiated Emissions (Horizontal)

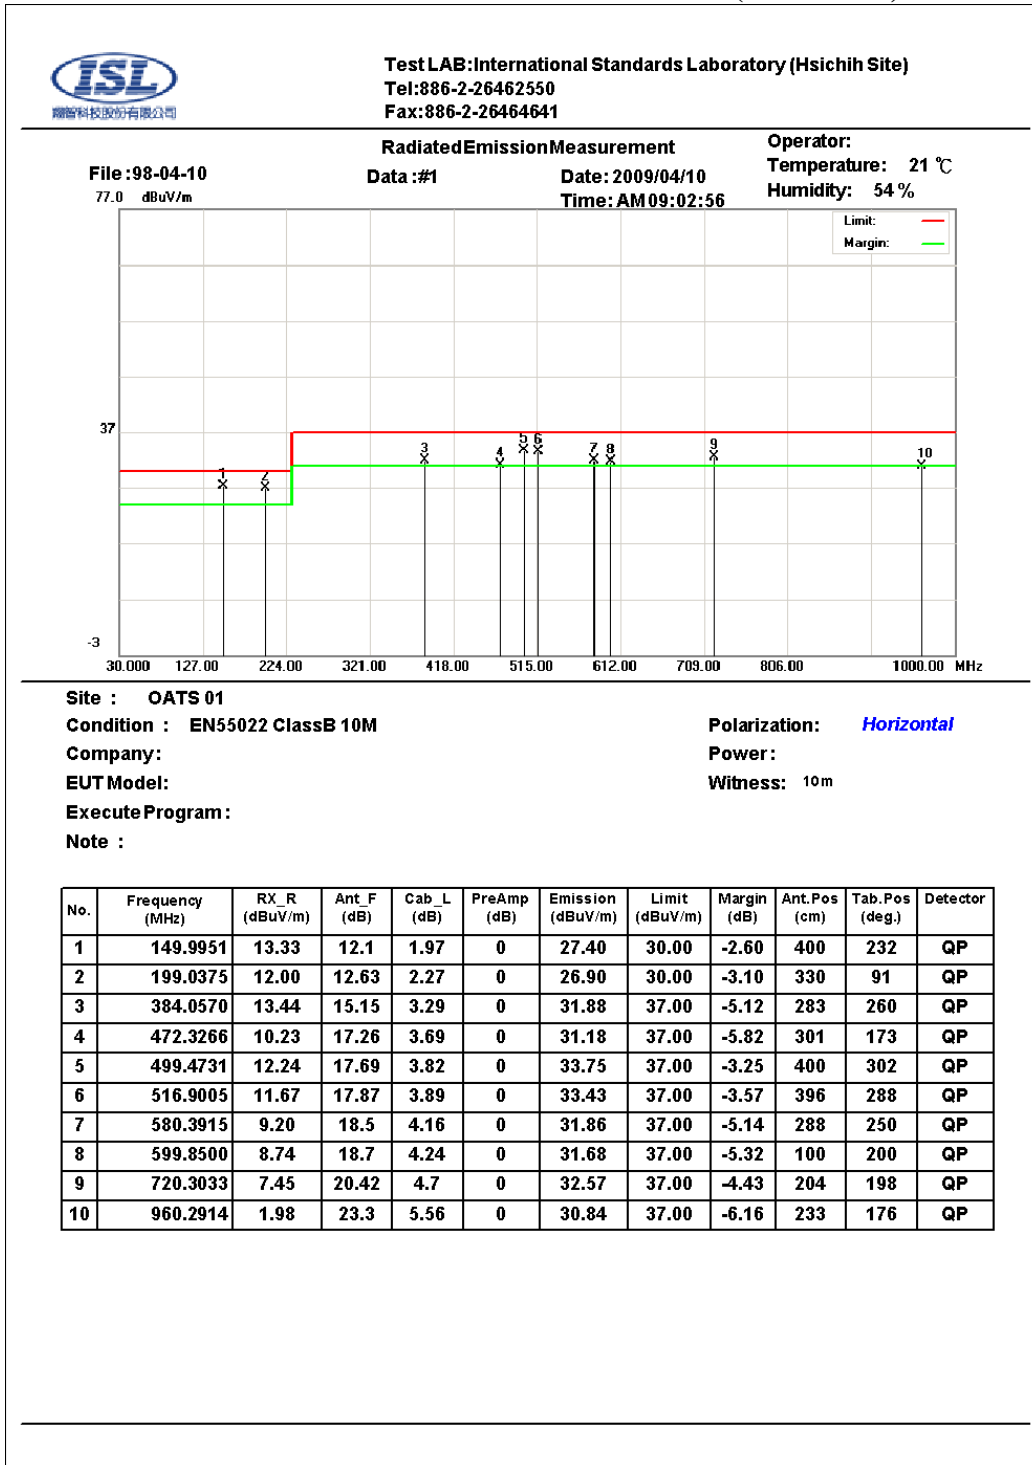

\* Note:

Margin = Corrected Amplitude – Limit


Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna      Distance: 10 meter,      Frequency: under 1000MHz

Horn Antenna      Distance: 3 meter,      Frequency: 1000MHz—18GHz

**Table 7.2.1 Radiated Emissions (Vertical)**

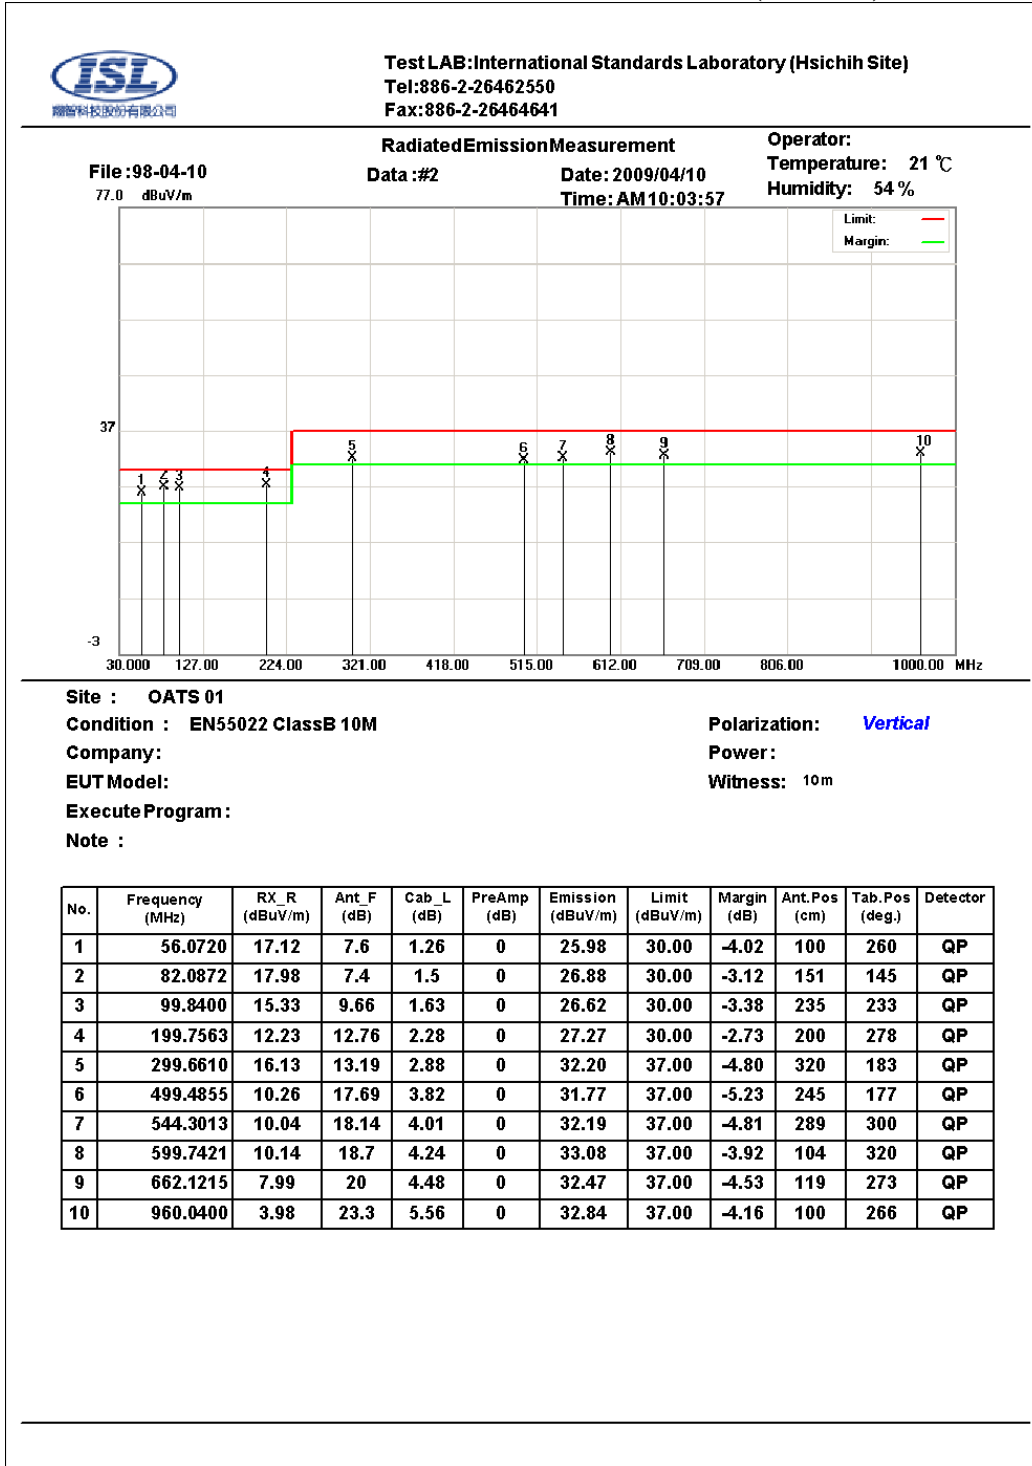

\* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna      Distance: 10 meter,      Frequency: under 1000MHz

Horn Antenna      Distance: 3 meter,      Frequency: 1000MHz—18GHz

7.3 Radiation Test Data: Configuration 2

Table 7.3.1 Radiated Emissions (Horizontal)

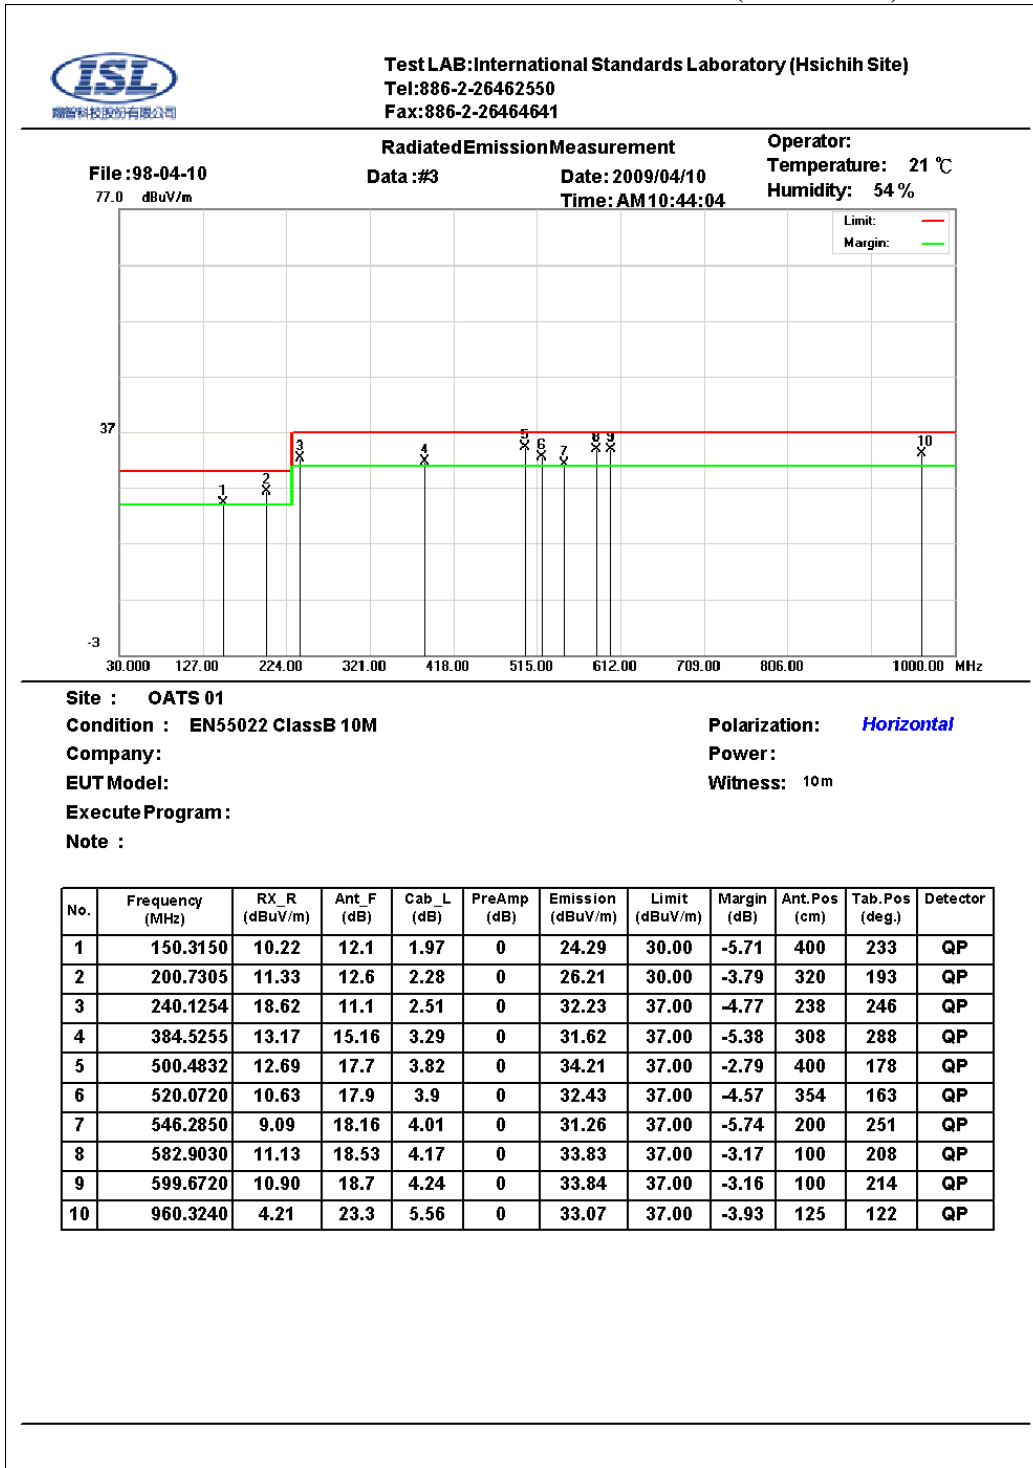

\* Note:

Margin = Corrected Amplitude – Limit


Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

**Table 7.3.1 Radiated Emissions (Vertical)**

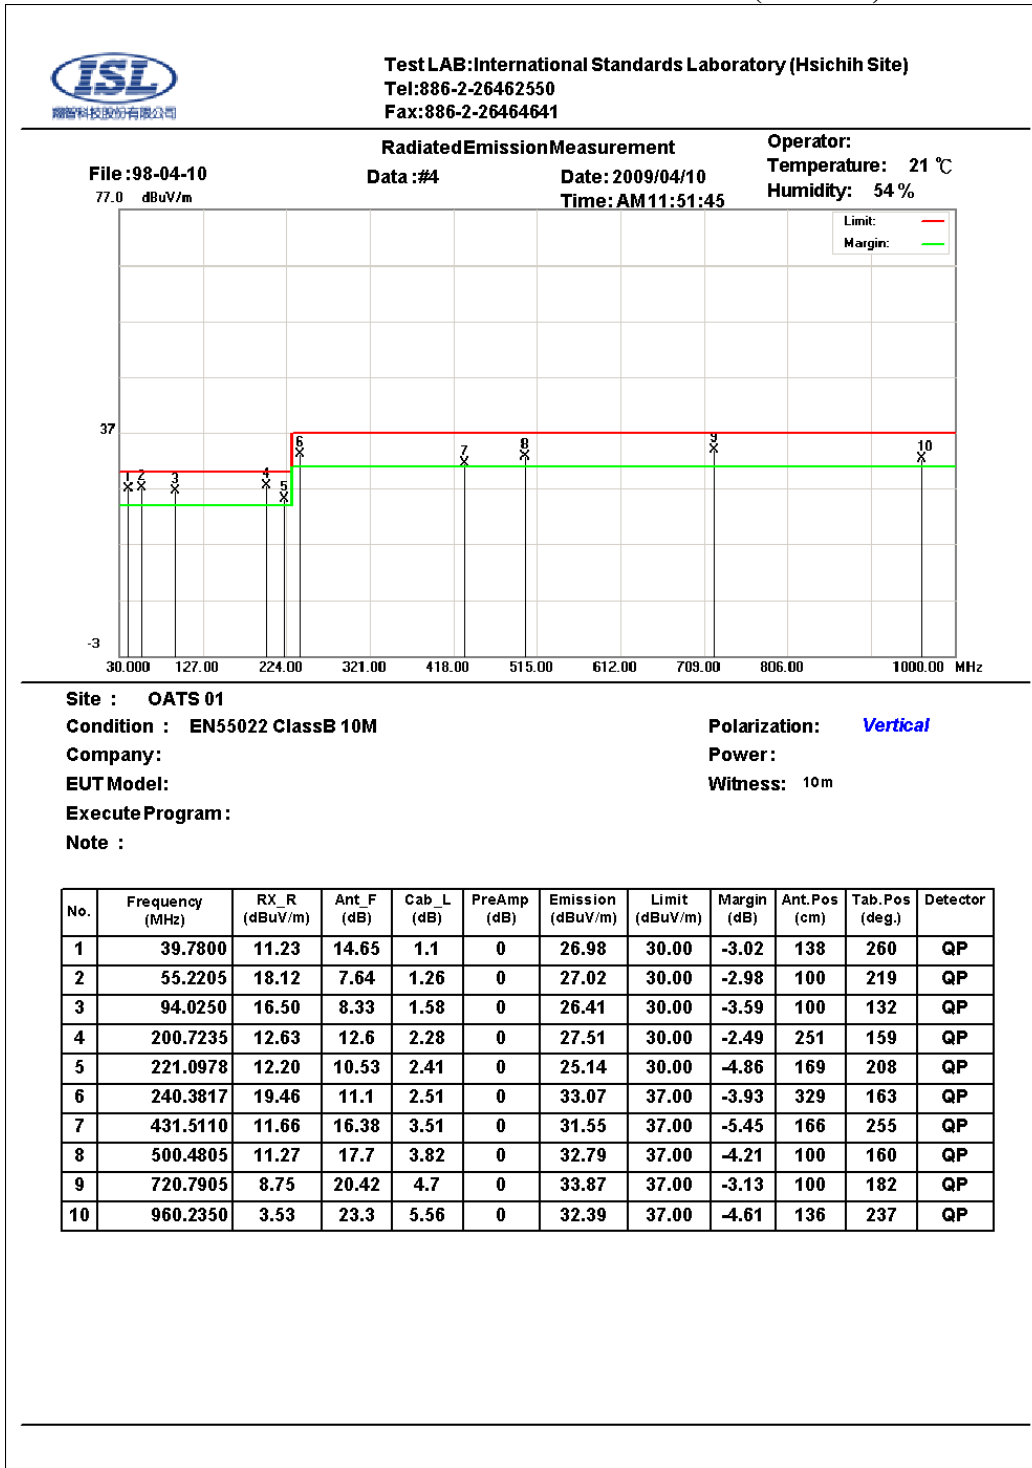

\* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

### 7.4 Radiation Test Data: Configuration 3

Table 7.4.1 Radiated Emissions (Horizontal)

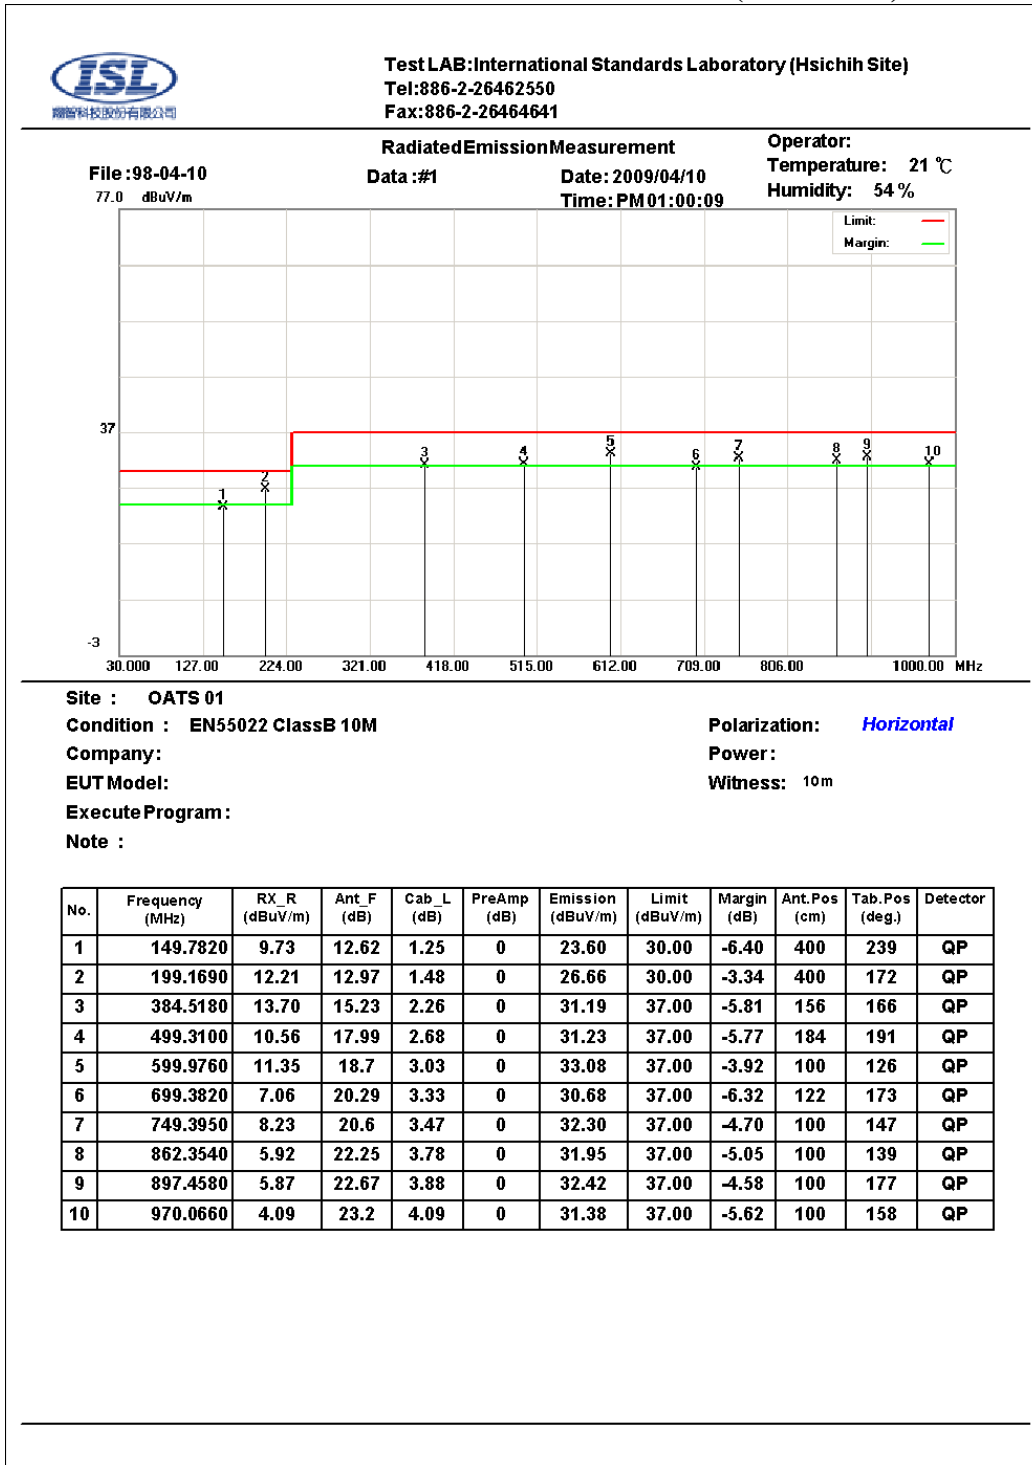

\* Note:

Margin = Corrected Amplitude – Limit


Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna      Distance: 10 meter,      Frequency: under 1000MHz

Horn Antenna      Distance: 3 meter,      Frequency: 1000MHz—18GHz

**Table 7.4.1 Radiated Emissions (Vertical)**

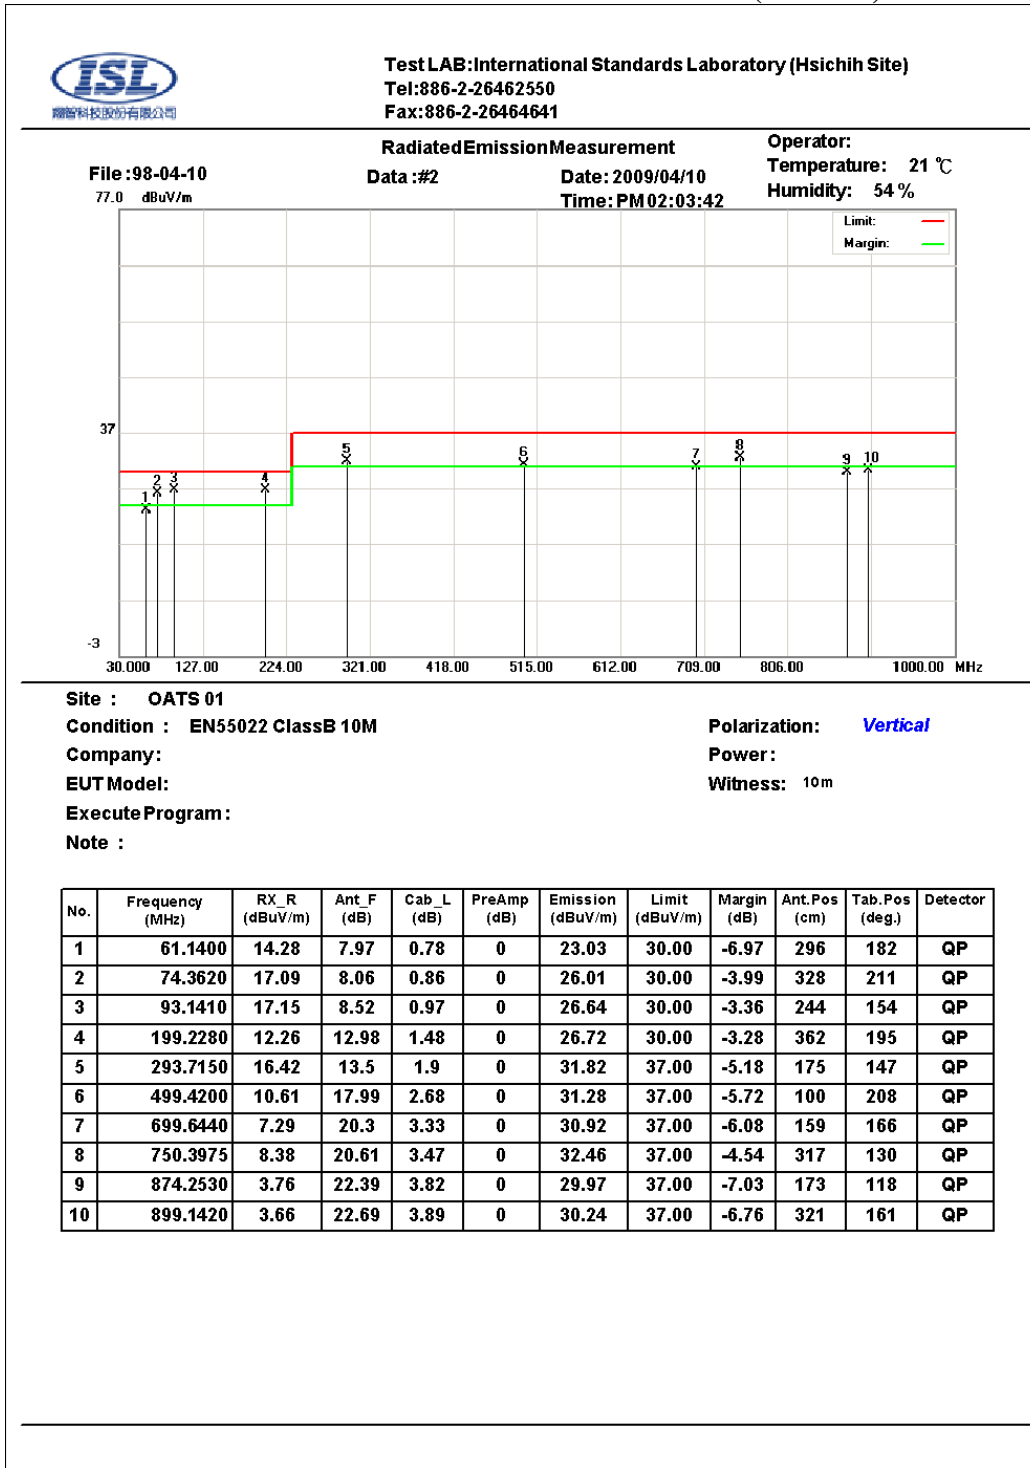

\* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

7.5 Radiation Test Data: Configuration 4

Table 7.5.1 Radiated Emissions (Horizontal)

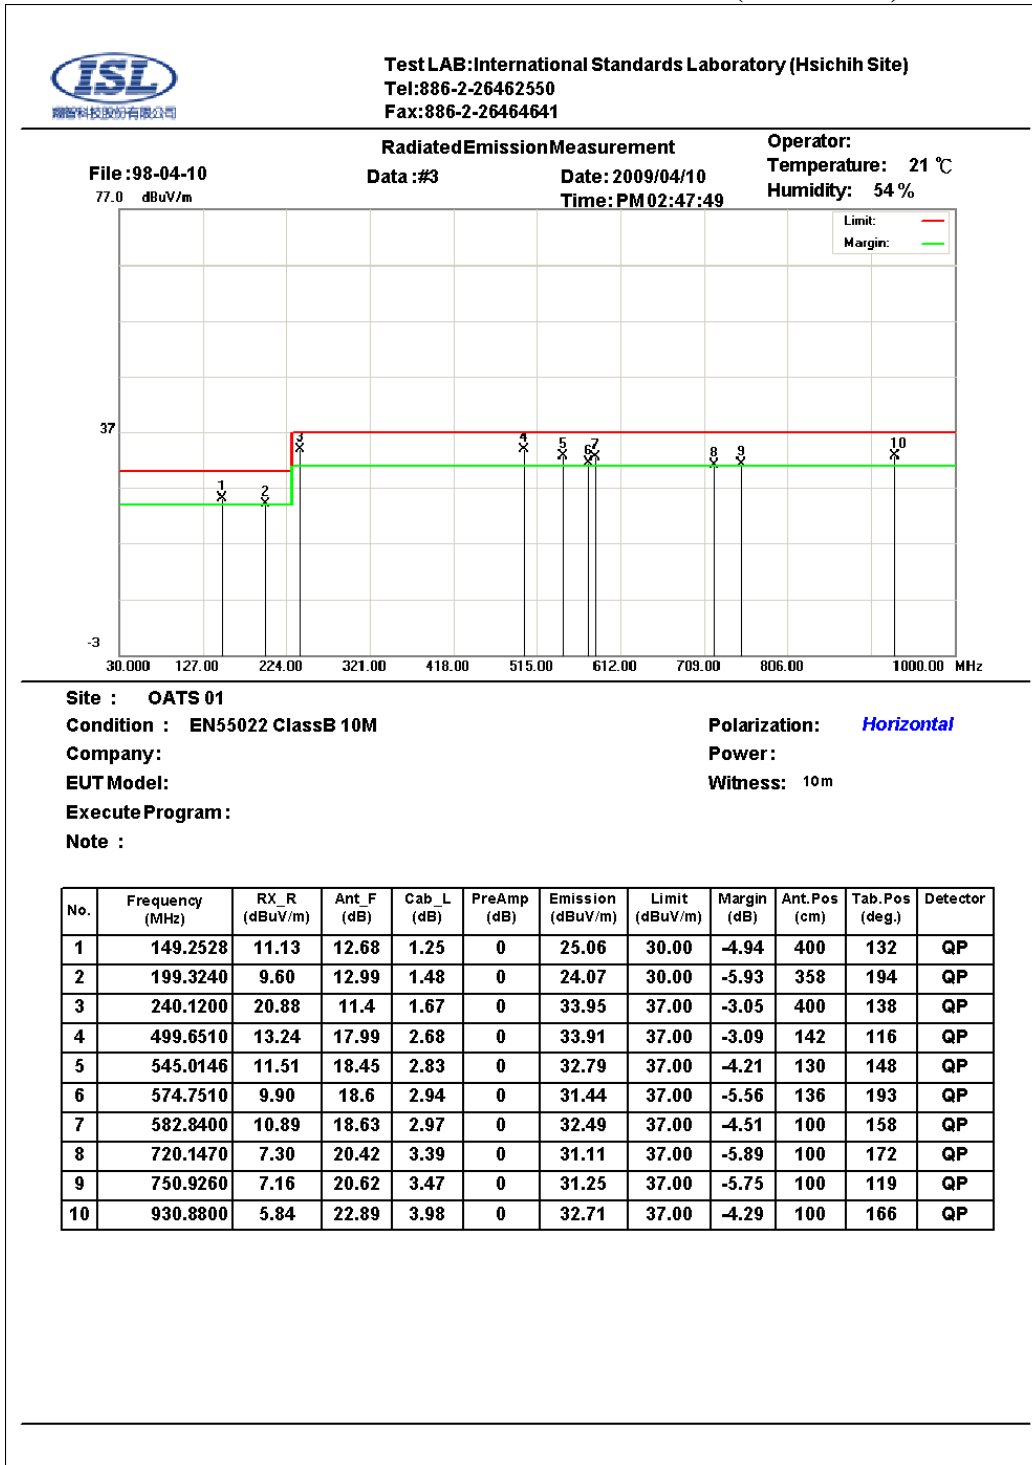

\* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz



**Table 7.5.1 Radiated Emissions (Vertical)**

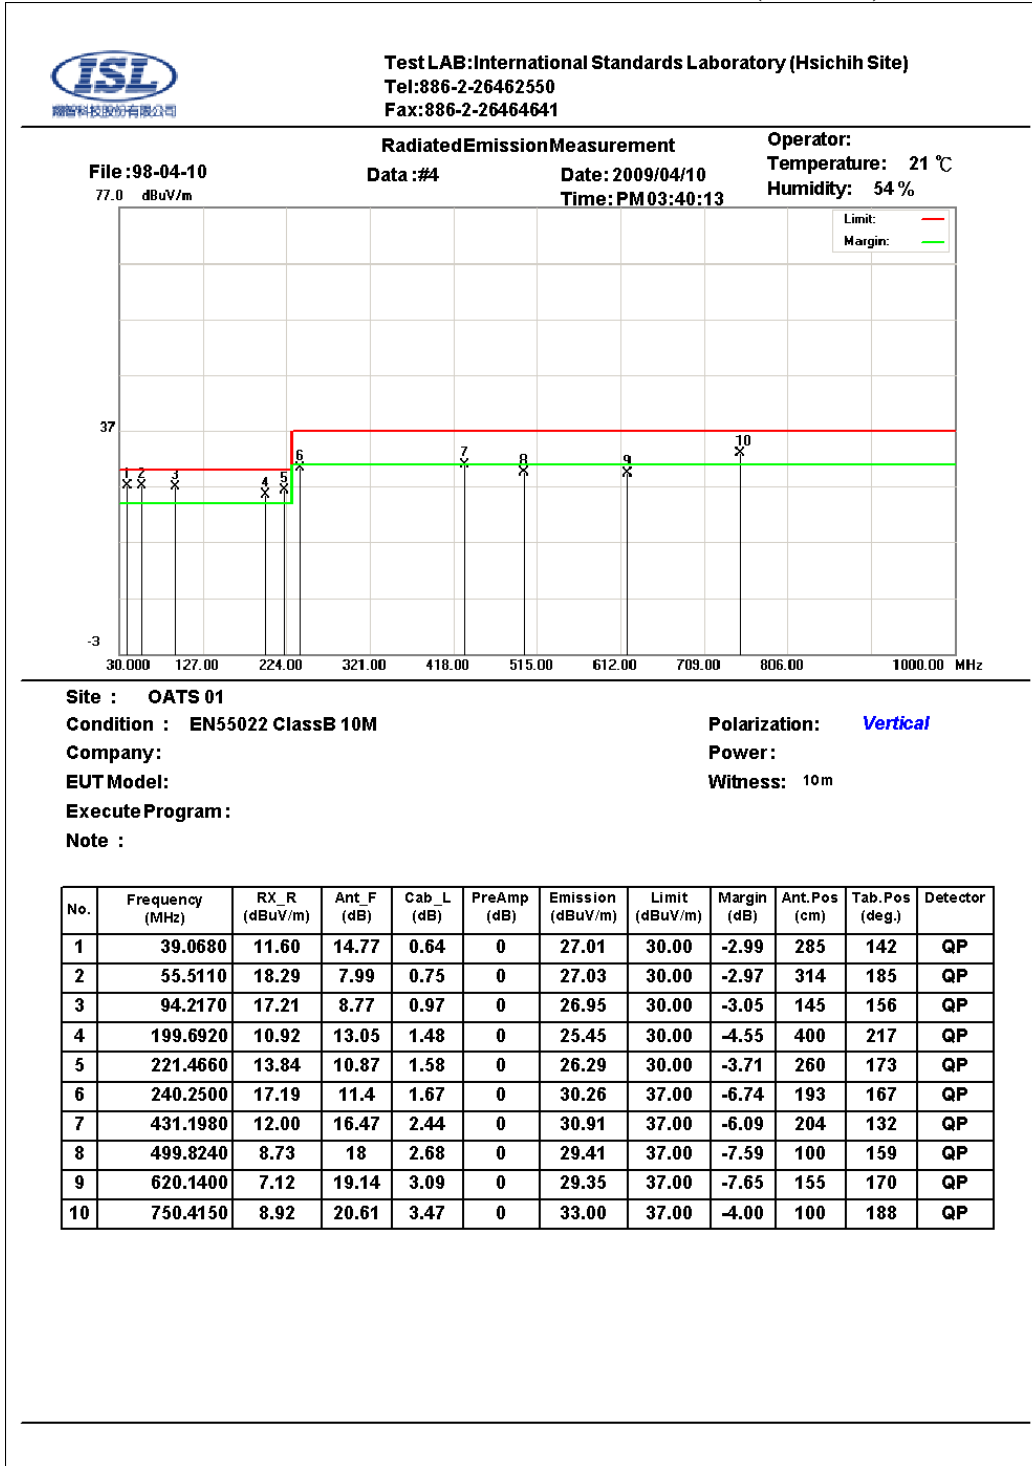

\* Note:

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

BILOG Antenna Distance: 10 meter, Frequency: under 1000MHz

Horn Antenna Distance: 3 meter, Frequency: 1000MHz—18GHz

## 8. Electrostatic discharge (ESD) immunity

### 8.1 Electrostatic discharge (ESD) immunity test

Port:	Enclosure
Basic Standard:	EN61000-4-2/ AS/NZS 61000.4.2 (details referred to Sec 2.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 2 kV, +/- 4 kV
Criteria:	B
Test Procedure	refer to ISL QA T04-S03
Temperature:	22 °C
Humidity:	40%

#### Selected Test Point

**Air:** discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.


**Contact:** Total 200 discharges minimum were to the selected contact points.

**Indirect Contact Points:** 25 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

For final test points, please refer to EUT 20 to EUT 21 of “Appendix: Photographs of EUT”. Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

#### Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470KΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

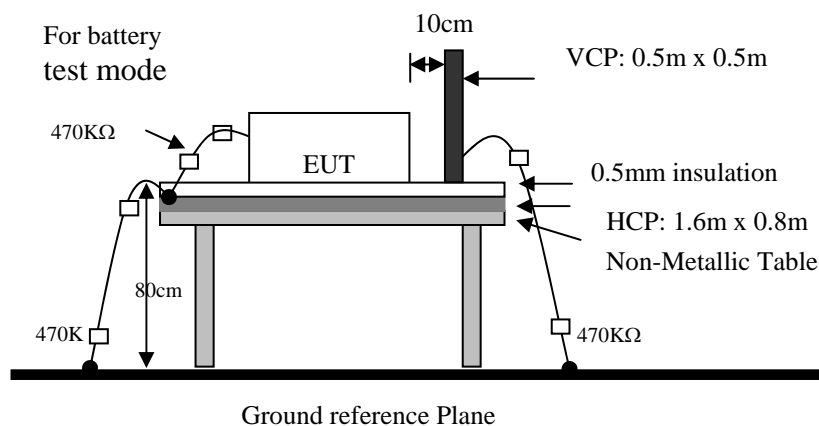

#### Test Result

**Performance of EUT complies with the given specification.**


## 9. Radio-Frequency, Electromagnetic Field immunity

### 9.1 Radio-Frequency, Electromagnetic Field immunity test

Port:	Enclosure
Basic Standard:	EN61000-4-3/ AS/NZS 61000.4.3 (details referred to Sec 2.2)
Test Level::	3 V/m
Modulation:	AM 1KHz 80%
Frequency range:	80 MHz~1 GHz
Frequency Step:	1% of last step frequency
Dwell time:	3s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°
Criteria:	A
Test Procedure	refer to ISL QA T04-S107
Temperature:	22°C
Humidity:	63%

#### Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

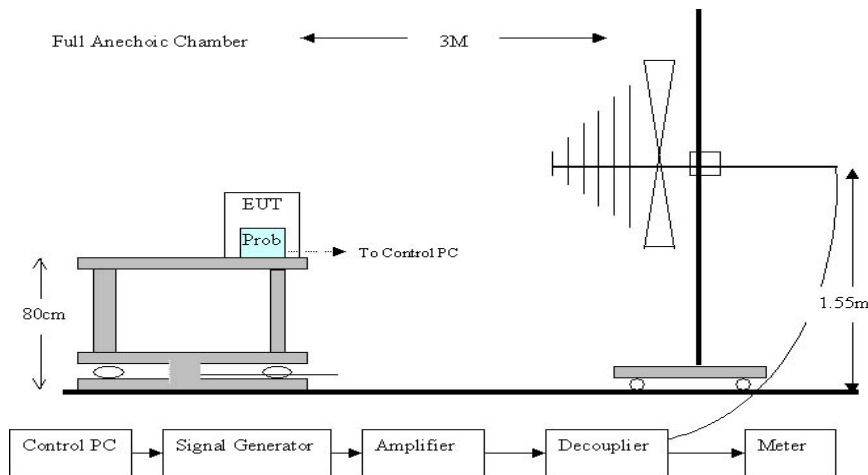

#### Test Result

**Performance of EUT complies with the given specification.**

## 10. Electrical Fast transients/burst immunity

### 10.1 Electrical Fast transient/burst immunity test

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN61000-4-4/ AS/NZS 61000.4.4 (details referred to Sec 2.2)
Test Level:	<b>AC Power Port:</b> +/- 1 kV <b>Twisted Pair LAN Port (I/O Cables):</b> +/- 0.5 kV
Rise Time:	5ns
Hold Time:	50ns
Repetition Frequency:	5KHz
Criteria:	B
Test Procedure	refer to ISL QA T04-S05
Temperature:	22 °C
Humidity:	40%

#### Test Procedure


The EUT was setup on a nonconductive table 0.8 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec
Capacitive coupling clamp	+	N	60 sec
	-	N	60 sec

**Note:** 'N' means normal, the EUT function is correct during the test.

**Test Setup**

EUT is at least 50cm from the conductive structure.

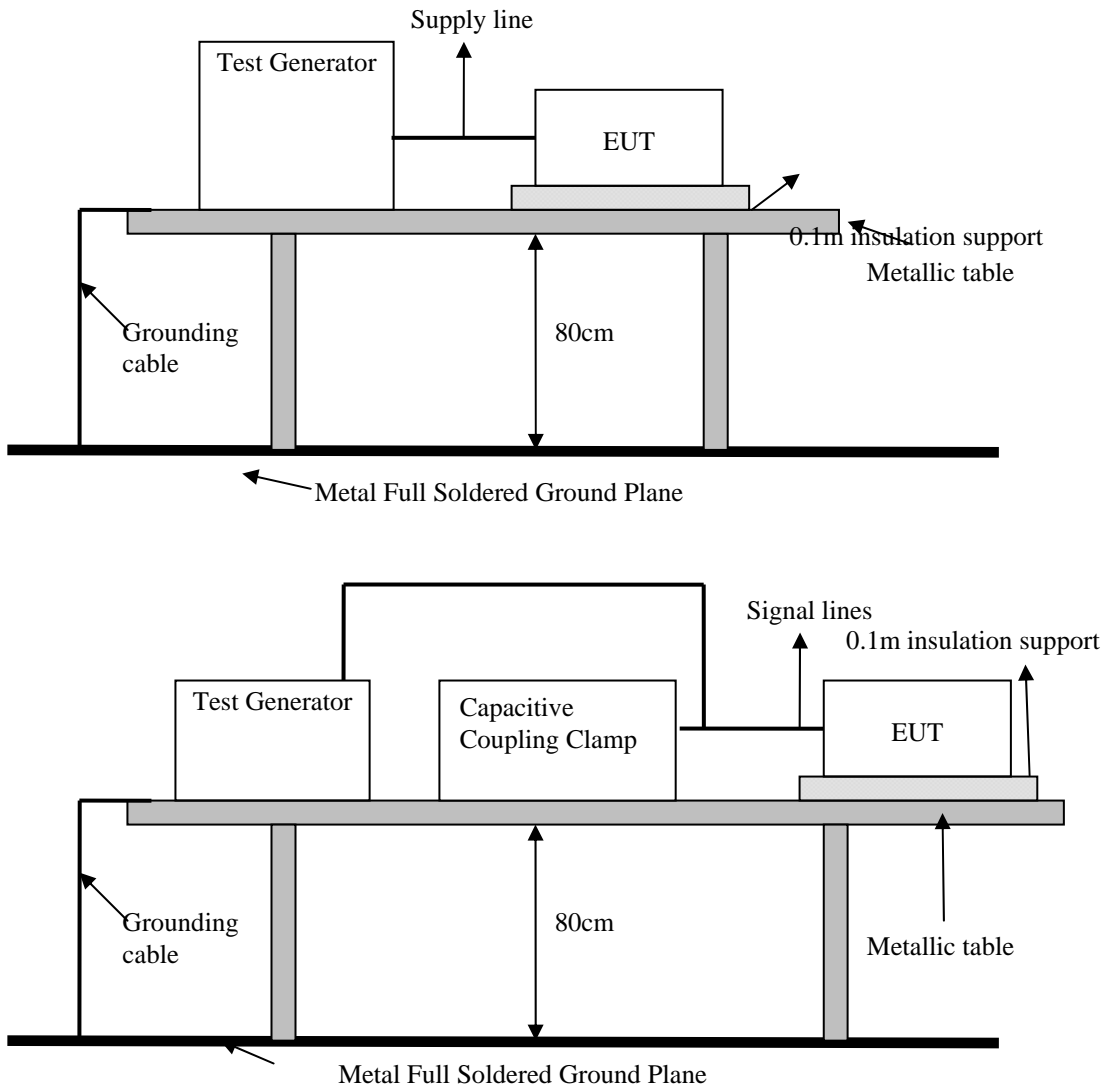

**Test Result**


**Performance of EUT complies with the given specification.**

# 11. Surge Immunity

## 11.1 Surge immunity test

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN61000-4-5/ AS/NZS 61000.4.5 (details referred to Sec 2.2)
Test Level:	<b>AC Power Port:</b> Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV <b>Twisted Pair LAN Port (I/O cable):</b> Line to Ground: +/- 0.5 kV, +/- 1 kV
Rise Time:	1.2us
Hold Time:	50us
Repetition Rate:	30 second
Angle:	☒0° ☒90° ☒180° ☒270°
Criteria:	B
Test Procedure	refer to ISL QA T04-S04
Temperature:	22°C
Humidity:	40%

### Test Setup

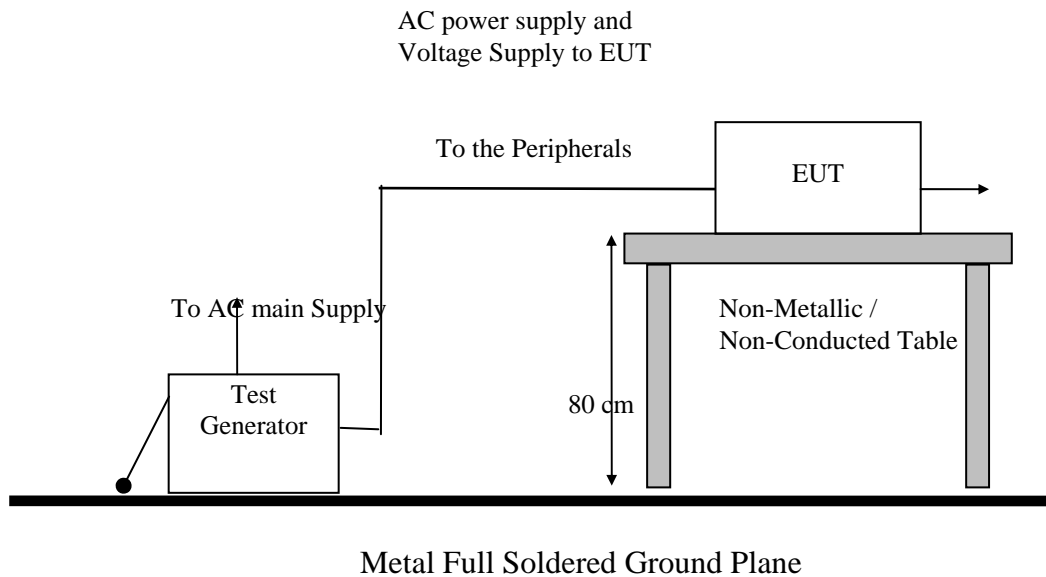

### Test Result


**Performance of EUT complies with the given specification.**

## 12. Immunity to Conductive Disturbance

### 12.1 Immunity to Conductive Disturbance

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN61000-4-6/ AS/NZS 61000.4.6 (details referred to Sec 2.2)
Test Level::	3 V
Modulation:	AM 1KHz 80%
Frequency range:	0.15 MHz - 80MHz
Frequency Step:	1% of last Frequency
Dwell time:	3s
Criteria:	A
Test Procedure	refer to ISL QA T04-S08
Temperature:	22°C
Humidity:	40%

#### Test Setup

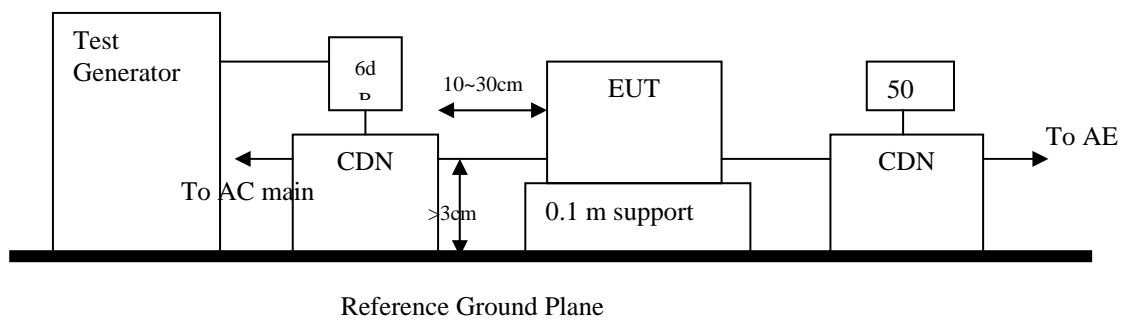

#### Test Result


**Performance of EUT complies with the given specification.**

### 13. Power Frequency Magnetic Field immunity

#### 13.1 Power Frequency Magnetic field immunity test

Port:	Enclosure
Basic Standard:	EN61000-4-8/ AS/NZS 61000.4.8 (details referred to Sec 2.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure	refer to ISL QA T04-S02
Temperature:	22°C
Humidity:	40%

#### Test Setup

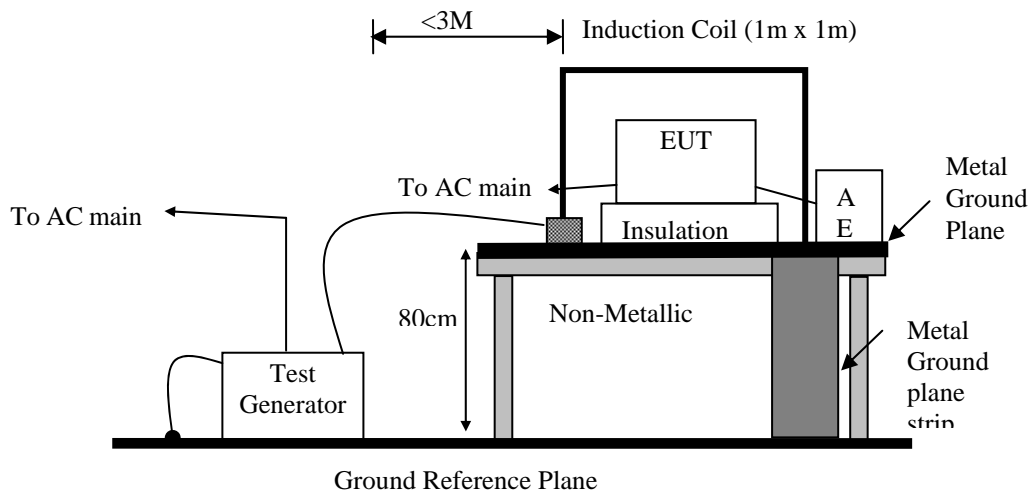

#### Test Result

Performance of EUT complies with the given specification.




## 14. Voltage Dips, Short Interruption and Voltage Variation immunity

### 14.1 Voltage Dips, Short Interruption and Voltage Variation immunity test

Port:	AC mains
Basic Standard:	EN61000-4-11/ AS/NZS 61000.4.11 (details referred to Sec 2.2)
Test Level: Criteria:	>95% in 0.5 period B
Test Level: Criteria:	30% in 25 period C
Test Level: Criteria:	>95% in 250 period C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure	refer to ISL QA T04-S108
Temperature:	22°C
Humidity:	40%

#### Test Setup

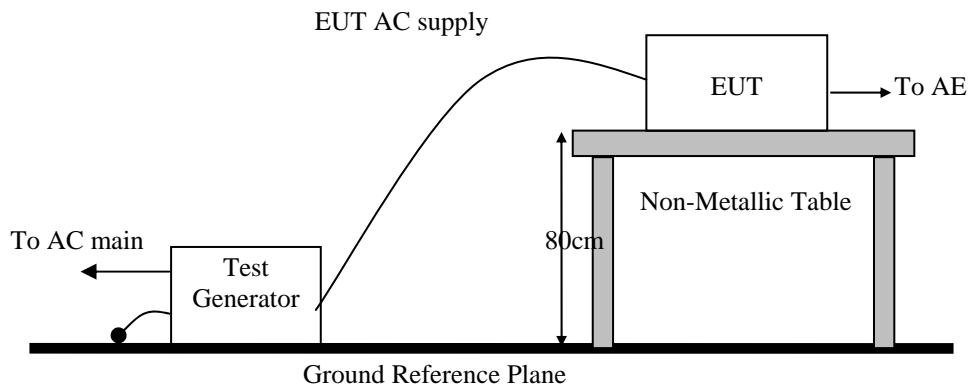

#### Test Result

Performance of EUT complies with the given specification.

## 15. Harmonics

### 15.1 Harmonics test

Port:	AC mains
Active Input Power:	>75W
Basic Standard:	EN61000-3-2/AS/NZS61000.3.2 (details referred to Sec 2.2)
Test Duration:	2.5min
Class:	D
Test Procedure	refer to ISL QA T04-S32
Temperature:	21°C
Humidity:	65%

#### Test Procedure


The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

#### Result

**Active input power under 75W, no limit apply, declare compliance (< 75 W 時說明)**  
**Performance of EUT complies with the given specification. (> 75 W 時說明)**

### Test Data 1

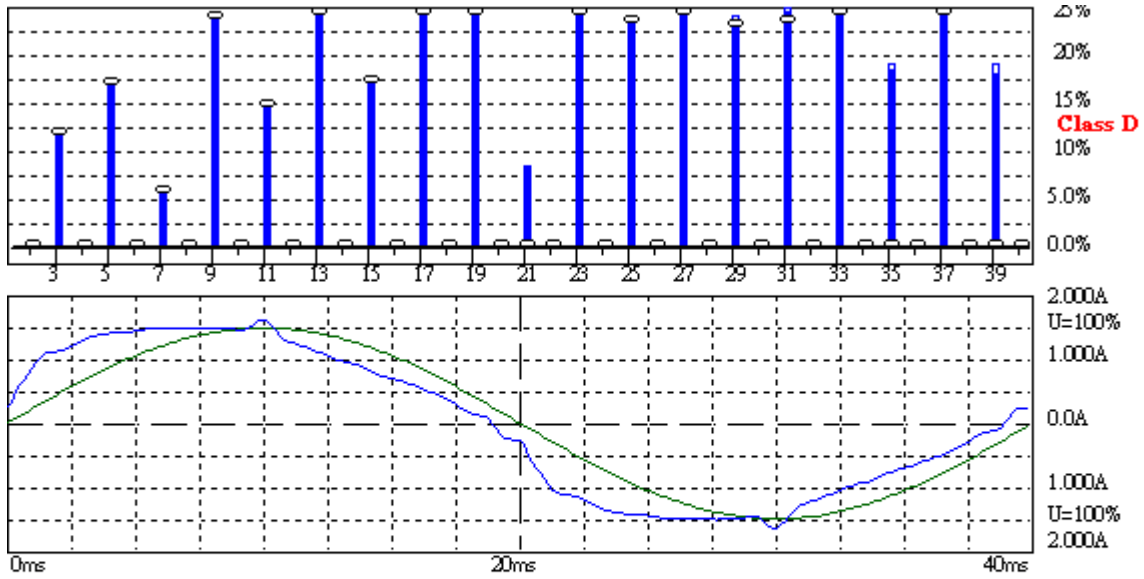

#### Harmonic Emission - IEC 61000-3-2 , EN 61000-3-2 , (CEN60555-2)

2009/4/15 PM 01:47:0

Urms =	230.1	V	P =	241.6	W	THC =	0.137	A	Range:	2 A	
Irms =	1.115	A	pf =	0.942	Pmax =	243.4	W	V-nom:	230 V	TestTime:	5 min (100%)

**Test completed, Result: PASSED**


HAR-1000 EMC-Retree

Urms = 230.1V    Freq = 49.987    Range: 2 A  
 Irms = 1.115A    Ipk = 1.639A    cf = 1.469  
 P = 241.6W    S = 256.6VA    pf = 0.942  
 THDi = 12.3 %    THDu = 0.20 %    Class D

Test - Time :    5min    ( 100 % )  
 Limit Reference: Pmax = 243.39W  
 Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Irms [A]	Irms%L [%]	Imax [A]	Imax%L [%]	Limit [A]	Status
1	50	1.0996		1.1068		1.1121			
2	100	0.0000		0.0006		0.0010			
3	150	0.0965	11.656	0.0969	11.712	0.0969	11.712	0.8275	
4	200	0.0000		0.0010		0.0011			
5	250	0.0779	16.854	0.0779	16.841	0.0780	16.868	0.4624	
6	300	0.0000		0.0005		0.0007			
7	350	0.0139	5.7040	0.0140	5.7677	0.0140	5.7677	0.2434	
8	400	0.0000		0.0009		0.0009			
9	450	0.0290	23.833	0.0289	23.773	0.0292	23.974	0.1217	
10	500	0.0000		0.0005		0.0007			
11	550	0.0125	14.665	0.0125	14.616	0.0127	14.903	0.0852	
12	600	0.0000		0.0007		0.0007			
13	650	0.0222	30.854	0.0222	30.822	0.0223	30.991	0.0721	
14	700	0.0000		0.0005		0.0007			
15	750	0.0108	17.244	0.0109	17.391	0.0109	17.391	0.0625	
16	800	0.0000		0.0005		0.0006			
17	850	0.0138	24.987	0.0140	25.468	0.0140	25.468	0.0551	
18	900	0.0000		0.0006		0.0009			
19	950	0.0217	44.007	0.0214	43.315	0.0221	44.800	0.0493	
20	1000	0.0000		0.0002		0.0004			
21	1050	0.0000	0.0000	0.0035	7.9334	0.0037	8.2070	0.0446	
22	1100	0.0000		0.0005		0.0006			
23	1150	0.0185	45.325	0.0187	45.842	0.0187	45.842	0.0407	
24	1200	0.0000		0.0004		0.0004			
25	1250	0.0088	23.419	0.0089	23.774	0.0089	23.774	0.0375	
26	1300	0.0000		0.0005		0.0006			
27	1350	0.0121	34.859	0.0121	34.821	0.0122	35.173	0.0347	
28	1400	0.0000		0.0004		0.0005			
29	1450	0.0074	23.020	0.0073	22.667	0.0077	23.800	0.0323	
30	1500	0.0000		0.0004		0.0005			
31	1550	0.0071	23.602	0.0073	24.230	0.0074	24.634	0.0302	
32	1600	0.0000		0.0004		0.0005			
33	1650	0.0095	33.335	0.0094	33.102	0.0098	34.391	0.0284	
34	1700	0.0000		0.0005		0.0006			
35	1750	0.0000	0.0000	0.0049	18.238	0.0050	18.694	0.0268	
36	1800	0.0000		0.0004		0.0005			
37	1850	0.0079	31.142	0.0079	31.330	0.0082	32.294	0.0253	
38	1900	0.0000		0.0006		0.0007			
39	1950	0.0000	0.0000	0.0043	17.782	0.0045	18.798	0.0240	
40	2000	0.0000		0.0004		0.0005			

### Test Data 2

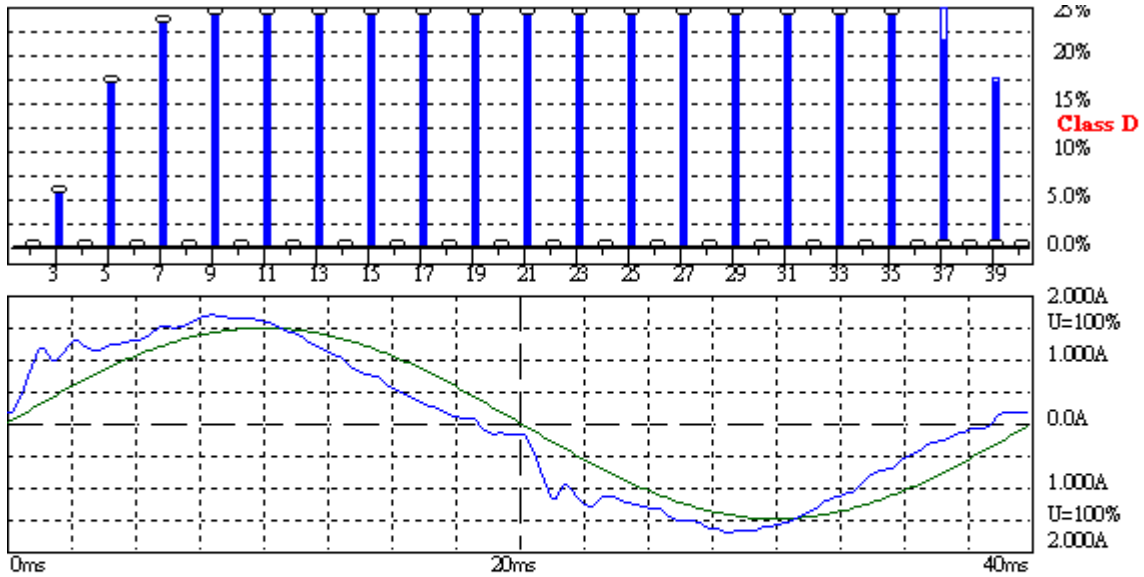

Harmonic Emission - IEC 61000-3-2, EN 61000-3-2, (EN60555-2)

2009/4/15 PM 04:49:4

Urms = 229.9 V	P = 241.5 W	THC = 0.137 A	Range: 2 A
Irms = 1.121 A	pf = 0.937	Pmax = 241.7 W	V-nom: 230 V
			TestTime: 5 min (100%)

Test completed, Result: PASSED

HAR-1000 EMC-Retre

Urms = 229.9V Freq = 49.987 Range: 2 A  
 Irms = 1.121A Ipk = 1.699A cf = 1.516  
 P = 241.5W S = 257.8VA pf = 0.937  
 THDi = 12.3 % THDu = 0.10 % Class D

Test - Time : 5min (100 %)

Limit Reference: Pmax = 241.72W

Test completed, Result: PASSED

Order	Freq. [Hz]	Iavg [A]	Iavg%L [%]	Irms [A]	Irms%L [%]	I <sub>max</sub> [A]	I <sub>max</sub> %L [%]	Limit [A]	Status
1	50	1.1096		1.1124		1.1136			
2	100	0.0000		0.0017		0.0018			
3	150	0.0463	5.6312	0.0461	5.6144	0.0469	5.7035	0.8219	
4	200	0.0000		0.0005		0.0007			
5	250	0.0784	17.072	0.0786	17.117	0.0787	17.143	0.4593	
6	300	0.0000		0.0004		0.0007			
7	350	0.0569	23.544	0.0571	23.634	0.0573	23.684	0.2417	
8	400	0.0000		0.0009		0.0013			
9	450	0.0366	30.303	0.0369	30.502	0.0369	30.502	0.1209	
10	500	0.0000		0.0006		0.0009			
11	550	0.0271	32.042	0.0272	32.176	0.0275	32.464	0.0846	
12	600	0.0000		0.0006		0.0010			
13	650	0.0233	32.524	0.0234	32.740	0.0234	32.740	0.0716	
14	700	0.0000		0.0007		0.0009			
15	750	0.0188	30.267	0.0190	30.694	0.0193	31.087	0.0620	
16	800	0.0000		0.0010		0.0011			
17	850	0.0264	48.272	0.0266	48.611	0.0269	49.057	0.0547	
18	900	0.0000		0.0046		0.0050			
19	950	0.0175	35.804	0.0176	35.888	0.0182	37.134	0.0490	
20	1000	0.0000		0.0051		0.0054			
21	1050	0.0242	54.616	0.0242	54.540	0.0244	55.091	0.0443	
22	1100	0.0000		0.0012		0.0015			
23	1150	0.0322	79.545	0.0320	79.042	0.0326	80.551	0.0405	
24	1200	0.0000		0.0009		0.0012			
25	1250	0.0216	58.071	0.0216	58.042	0.0217	58.370	0.0372	
26	1300	0.0000		0.0009		0.0011			
27	1350	0.0193	56.063	0.0194	56.311	0.0197	57.019	0.0345	
28	1400	0.0000		0.0006		0.0009			
29	1450	0.0098	30.560	0.0099	30.812	0.0101	31.572	0.0321	
30	1500	0.0000		0.0009		0.0010			
31	1550	0.0189	63.097	0.0188	62.620	0.0195	65.060	0.0300	
32	1600	0.0000		0.0009		0.0011			
33	1650	0.0149	52.909	0.0149	52.809	0.0151	53.674	0.0282	
34	1700	0.0000		0.0013		0.0016			
35	1750	0.0079	29.734	0.0079	29.841	0.0083	31.218	0.0266	
36	1800	0.0000		0.0007		0.0009			
37	1850	0.0000	0.0612	0.0054	21.354	0.0067	26.693	0.0252	
38	1900	0.0000		0.0016		0.0017			
39	1950	0.0000	0.0000	0.0040	16.881	0.0042	17.393	0.0239	
40	2000	0.0000		0.0010		0.0012			

## 16. Voltage Fluctuations

### 16.1 Voltage Fluctuations test

Port:	AC mains
Basic Standard:	EN61000-3-3/AS/NZS61000.3.3 (details referred to Sec 2.2)
Test Procedure	refer to ISL QA T04-S32
Observation period:	For Pst 10min
	For Plt 2 hours
Temperature:	21°C
Humidity:	65%

#### **Test Procedure**

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.


#### **Result**

**Performance of EUT complies with the given specification.**

**Test Data 1**

10MIN

Flickermeter 1000-4-15 for 230V/50Hz

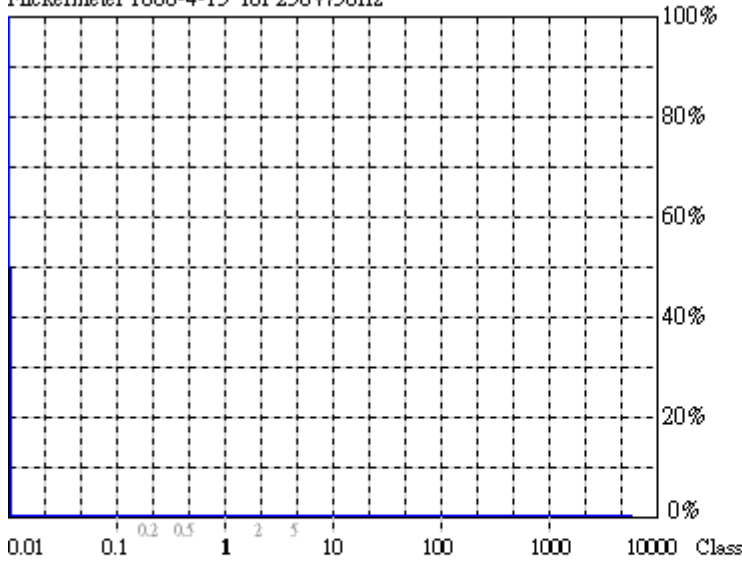

**Actual Flicker (Fli): 0.00**  
**Short-term Flicker (Pst): 0.07**  
 Limit (Pst): 1.00  
**Long-term Flicker (Plt): 0.07**  
 Limit (Plt): 0.65  
**Maximum Relative Volt. Change (dmax): 0.00%**  
 Limit (dmax): 4.00%  
**Relative Steady-state Voltage Change (dc): 0.00%**  
 Limit (dc): 3.30%  
**Maximum Interval exceeding 3.30% (dt): 0.00ms**  
 Limit (dt>Lim): 500ms

**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)**

2009/4/15 PM 02:04:3

U<sub>rms</sub> = 229.7 V P = 241.1 W  
 I<sub>rms</sub> = 1.114 A pf = 0.942

Range: 2 A  
 V<sub>nom</sub>: 230 V  
 TestTime: 10 min (100%)


**Test completed, Result: PASSED**

HAR-1000 EMC-Return

120

120MIN

Flickermeter 1000-4-15 for 230V/50Hz

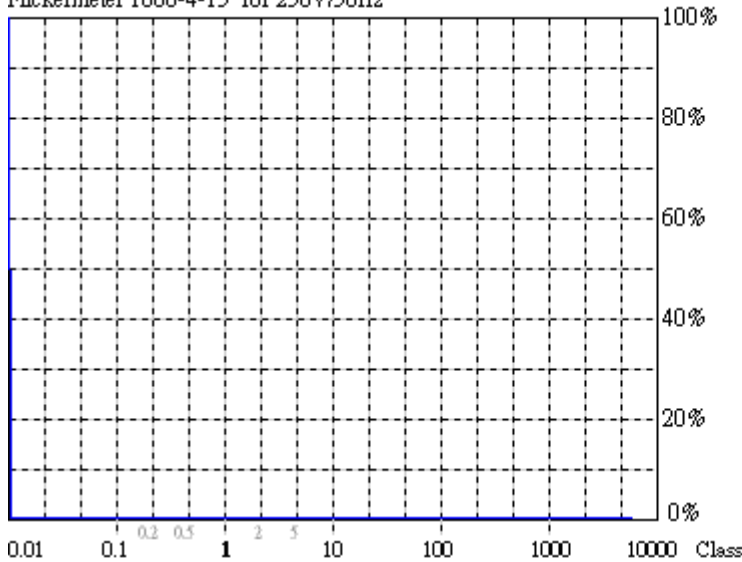

**Actual Flicker (Fli): 0.00**  
**Short-term Flicker (Pst): 0.07**  
 Limit (Pst): 1.00  
**Long-term Flicker (Plt): 0.07**  
 Limit (Plt): 0.65  
**Maximum Relative Volt. Change (dmax): 0.00%**  
 Limit (dmax): 4.00%  
**Relative Steady-state Voltage Change (dc): 0.00%**  
 Limit (dc): 3.30%  
**Maximum Interval exceeding 3.30% (dt): 0.00ms**  
 Limit (dt>Lim): 500ms

**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)**

2009/4/15 PM 04:16:4

U<sub>rms</sub> = 229.7 V P = 241.2 W  
 I<sub>rms</sub> = 1.114 A pf = 0.942

Range: 2 A  
 V<sub>nom</sub>: 230 V  
 TestTime: 120 min (10000%)


**Test completed, Result: PASSED**

HAR-1000 EMC-Return



**Test Data 2**

10 MIN  
Flickermeter 1000-4-15 for 230V/50Hz

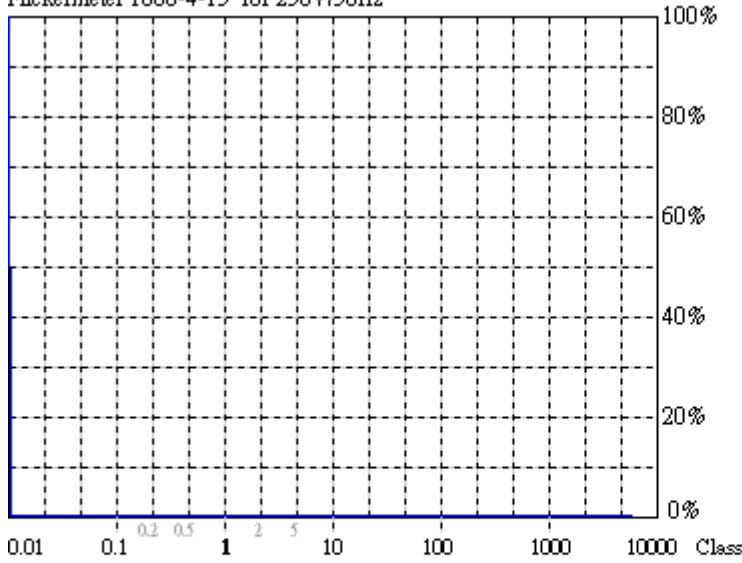

**Actual Flicker (Fli): 0.00**  
**Short-term Flicker (Pst): 0.07**  
 Limit (Pst): 1.00  
**Long-term Flicker (Plt): 0.07**  
 Limit (Plt): 0.65  
**Maximum Relative Volt. Change (dmax): 0.00%**  
 Limit (dmax): 4.00%  
**Relative Steady-state Voltage Change (dc): 0.01%**  
 Limit (dc): 3.30%  
**Maximum Interval exceeding 3.30% (dt): 0.00ms**  
 Limit (dt>Lim): 500ms

**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)**

2009/4/15 PM 05:02:2


U<sub>rms</sub> = 229.5 V P = 241.3 W  
 I<sub>rms</sub> = 1.122 A pf = 0.937

Range: 2 A  
 V-nom: 230 V  
 TestTime: 10 min (100%)

**Test completed, Result: PASSED**

HAR-1000 EMC-Retester

120 MIN  
Flickermeter 1000-4-15 for 230V/50Hz

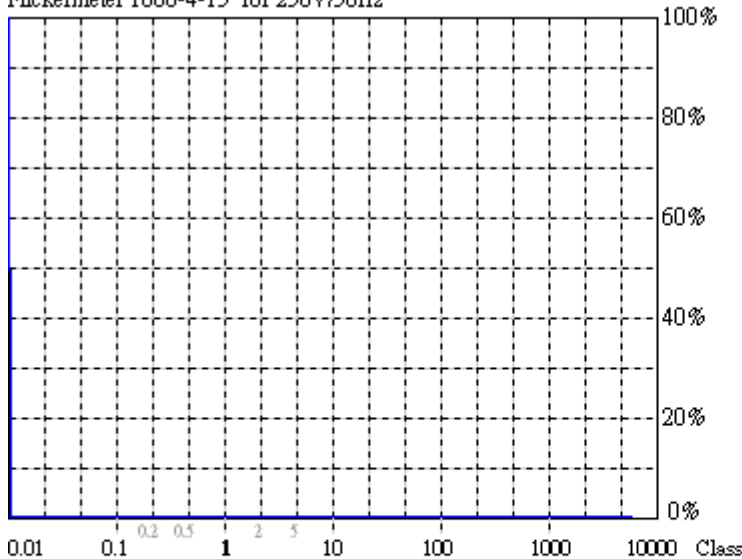

**Actual Flicker (Fli): 0.00**  
**Short-term Flicker (Pst): 0.07**  
 Limit (Pst): 1.00  
**Long-term Flicker (Plt): 0.07**  
 Limit (Plt): 0.65  
**Maximum Relative Volt. Change (dmax): 0.00%**  
 Limit (dmax): 4.00%  
**Relative Steady-state Voltage Change (dc): 0.00%**  
 Limit (dc): 3.30%  
**Maximum Interval exceeding 3.30% (dt): 0.00ms**  
 Limit (dt>Lim): 500ms

**Flicker Emission - IEC 61000-3-3 , EN 61000-3-3 , (EN60555-3)**

2009/4/15 PM 07:09:2

U<sub>rms</sub> = 229.5 V P = 241.8 W  
 I<sub>rms</sub> = 1.124 A pf = 0.937

Range: 2 A  
 V-nom: 230 V  
 TestTime: 120 min (10000%)

**Test completed, Result: PASSED**

HAR-1000 EMC-Retester

## 17. Appendix

### 17.1 Appendix A: Measurement Procedure for Main Power Port Conducted Emissions

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

## **17.2 Appendix B: Measurement Procedure for Telecommunication Port Conducted Emissions**

The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

The EUT, any support equipment, and any interconnecting cables were arranged and moved to get the maximum measurement.

Power to the EUT was provided through the LISN which has the Impedance (50 Ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISN was filtered to eliminate ambient signal interference and this filter was bonded to ground. Peripheral equipment to provide a functional system (support equipment) for EUT testing was powered through a ganged, metal power outlet box bonded to the ground. AC input power for the auxiliary power outlets was obtained from the same filtered source that provides input power to the LISN.

If the EUT is supplied with a flexible power cord, if the power cord length in excess of 1 m, the excess cable shall be bundled at approximate center of the power cord with the bundles 30 cm to 40 cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall be 1 meter in length. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information could be useful in reducing their amplitude.

### **17.3 Appendix C: Test Procedure for Radiated Emissions Preliminary Measurements in the Anechoic Chamber**

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

#### **Measurements on the Open Site or Chamber**

The radiated emissions test will then be repeated on the open site or chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

## 17.4 Appendix D: Test Equipment

### 17.4.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction	Coaxial Cable 1F-C1	Harbourindustries	RG400	1F-C1	10/23/2008	10/23/2009
Conduction	Hygro-Thermo Meter 11	N/A	TH-400	ISL-002	02/23/2009	02/23/2010
Conduction	LISN 02	EMCO	3825/2	1407	07/07/2008	07/07/2009
Conduction	LISN 03	R&S	ESH3-Z5 831.5518.52	828874/010	07/07/2008	07/07/2009
Conduction	ISN T2 03	FCC	FCC-TLISN-T2-02	20618	08/05/2008	08/05/2009
Conduction	ISN T4 05	FCC	FCC-TLISN-T4-02	20619	08/06/2008	08/06/2009
Conduction	ISN T8 03	FCC	FCC-TLINS-T8-02	20620	08/05/2008	08/05/2009
Conduction	EMI Receiver 08	Schwarzbeck Mess-Elektronik	FCKL 1528	1528-202	09/05/2008	09/05/2009
Conduction	Spectrum Analyzer 05	HP	8594EM	3619A00192	02/23/2009	02/23/2010
Radiation	BILOG Antenna 10	Sumol Sciences	JB1	A013004-1	07/24/2008	07/24/2009
Radiation	Coaxial Cable 3F-10M	MIYAZAKI	8D-8F	10M-1	10/23/2008	10/23/2009
Radiation	Coaxial Cable 3F-3M	BELDEN	RG-8/U	3F-3M	10/23/2008	10/23/2009
Radiation	Spectrum Analyzer 12	Advantest	R3132	130200208	03/05/2009	03/05/2010
Radiation	Hygro-Thermo Meter 10	N/A	TH-400	ISL-001	02/23/2009	02/23/2010
Rad. above 1Ghz	Horn Antenna 01	EMCO	3115	9504-4462	11/04/2008	11/04/2009
Rad. above 1Ghz	Horn Antenna 03	COM-Power	AH-826	100A	02/27/2009	02/27/2010
Rad. above 1Ghz	Microwave Cable RF07-3	HUBER+SU HNER AG.	Sucoflex 103	42728/3	07/17/2008	07/17/2009
Rad. above 1Ghz	Preamplifier 01	R&S	ESMI-Z7	1045.502	07/17/2008	07/17/2009
Radiation	Signal Generator 01	HP	8656B	2635A04675	08/21/2008	08/21/2009
Radiation	EMI Receiver 09	Schwarzbeck Mess-Elektronik	FCVU 1534	1534-150	05/08/2008	05/08/2009

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-3-2/3	DC Burn-In Load 02	D-RAM	DBS-2100	2100-910027	N/A	N/A
EN61K-3-2/3	Harmonic/Flicker Test System 03	EMC Partner	HARMONICS-1000	178	03/27/2009	03/27/2010
EN61K-3-2/3	Hygro-Thermo Meter 15	N/A	TH-400	ISL-006	02/23/2009	02/23/2010
EN61K-4	Hygro-Thermo Meter 14	N/A	TH-400	ISL-005	02/23/2009	02/23/2010
EN61K-4-,4,5,8,11	TRANSIENT 2000 01	EMC Partner	TRANSIENT-2000	950	10/23/2008	10/23/2009
EN61K-4-2	ESD GUN 04	Schaffner	NSG 438	489	03/09/2009	03/09/2010
EN61K-4-3	BILOG Antenna 06	Schaffner	CBL6112B	2754	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~3.0GHz 60W	AR	60S1G3	312762	N/A	N/A
EN61K-4-3	Broadband coupler 10K~220Mhz	Amplifier Research	DC2500	19810	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180	20364	N/A	N/A
EN61K-4-3	Broadband Coupler 1~4GHz	Werlatone	C5291	6516	N/A	N/A
EN61K-4-3	Coaxial Cable Chmb 04-3M-2	Belden	RG-8/U	Chmb 04-3M-2	N/A	N/A
EN61K-4-3	Signal Generator 03	Anritsu	MG3642A	6200162550	02/27/2009	02/27/2010
EN61K-4-4	Digital Oscilloscope	Tektronix	TDS 684A	B010761	N/A	N/A
EN61K-4-4	EFT Clamp	Precision	1604242	CNEFT1000-103	N/A	N/A
EN61K-4-5	CDN-UTP8 01	EMC Partner	CDN-UTP8	032	08/20/2008	08/20/2009
EN61K-4-5	SURGE-TESTER 01	EMC Partner	MIG0603IN3	778	10/14/2008	10/14/2009
EN61K-4-6	6dB Attenuator	Weinschel Corp	33-6-34	BC5975	N/A	N/A
EN61K-4-6	Amplifier 4-6	Amplifier Research	150A100	1-1-R-02157	N/A	N/A
EN61K-4-6	Attenuator 6dB 4-6	BIRO	100-A-FFN-06	0123	N/A	N/A
EN61K-4-6	CDN M2+M3	Frankonia	M2+M3	A3011016	07/08/2008	07/08/2009
EN61K-4-6	CDN T2 01	Frankonia	T2	A3010003	07/08/2008	07/08/2009
EN61K-4-6	CDN T4 05	FCC Inc.	FCC-801-T4-R J45	08020	08/06/2008	08/06/2009
EN61K-4-6	CDN T8 01	FCC Inc.	FCC-801-T8-R J45	08021	08/06/2008	08/06/2009
EN61K-4-6	EM-Clamp 01	FCC	F-2031-23MM	539	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-1	Harbour Industries	M17/128-RG4 00	4-6 01-1	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-2	Harbour Industries	M17/128-RG4 00	4-6 01-2	N/A	N/A
EN61K-4-6	Coaxial Cable 4-6 01-3	Harbour Industries	M17/128-RG4 00	4-6 01-3	N/A	N/A
EN61K-4-6	KAL-AD RJ45S	BIRO			N/A	N/A
EN61K-4-6	KAL-AD T2	BIRO			N/A	N/A
EN61K-4-6	Passive Impedance Adaptor 4-6	FCC	FCC-801-150-50-CDN	9758;9759	N/A	N/A
EN61K-4-6, CISPR 13, Antenna	Signal Generator 01	HP	8656B	2635A04675	08/21/2008	08/21/2009
EN61K-4-8	Clamp Meter 4-8	TES	3090	990900322	07/11/2008	07/11/2009
EN61K-4-8	Magnetic Field Antenna	Precision	TRAIZ44B	MF1000-23	N/A	N/A


### 17.5 Software for Controlling Spectrum/Receiver and Calculating Test Data

Test Item	Filename	Version
EN61000-3-2	HARCS.EXE	4.16
EN61000-3-3	HARCS.EXE	4.16
EN61000-4-3	Tile.Exe	2.0.P
EN61000-4-6	EN61000-4-6 Application Software	1.13.e
EN61000-4-2	N/A	2.0
EN61000-4-4	Tema.EXE	1.69
EN61000-4-5	Tema.EXE	1.69
EN61000-4-8	N/A	
EN61000-4-11	VDS-2002Rs.EXE	2.00

Radiation/Conduction	Filename	Version	Issued Date
Hsichih Conduction	EZ EMC	1.1.4.2	2/10/2007
Hsichih Radiation	EZ EMC	1.1.4.2	1/24/2007


## 17.6 Appendix E: Layout of EUT and Support Equipment

### 17.6.1 General Power Main Port Conducted Test Configuration


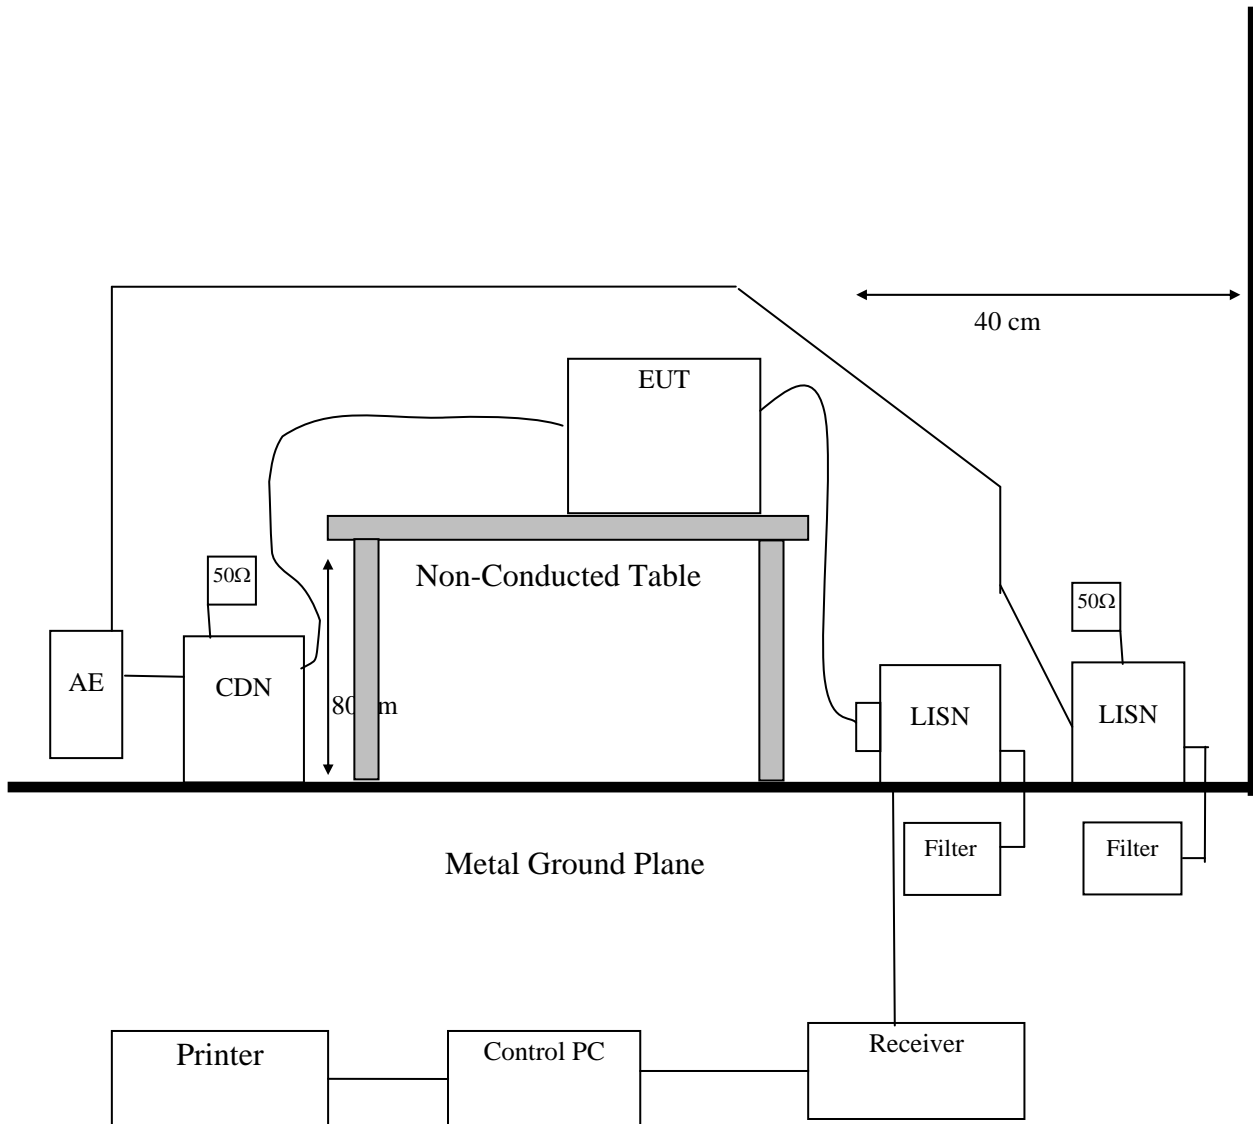




### 17.6.2 General Telecommunication Port Conducted Emission Test Configuration

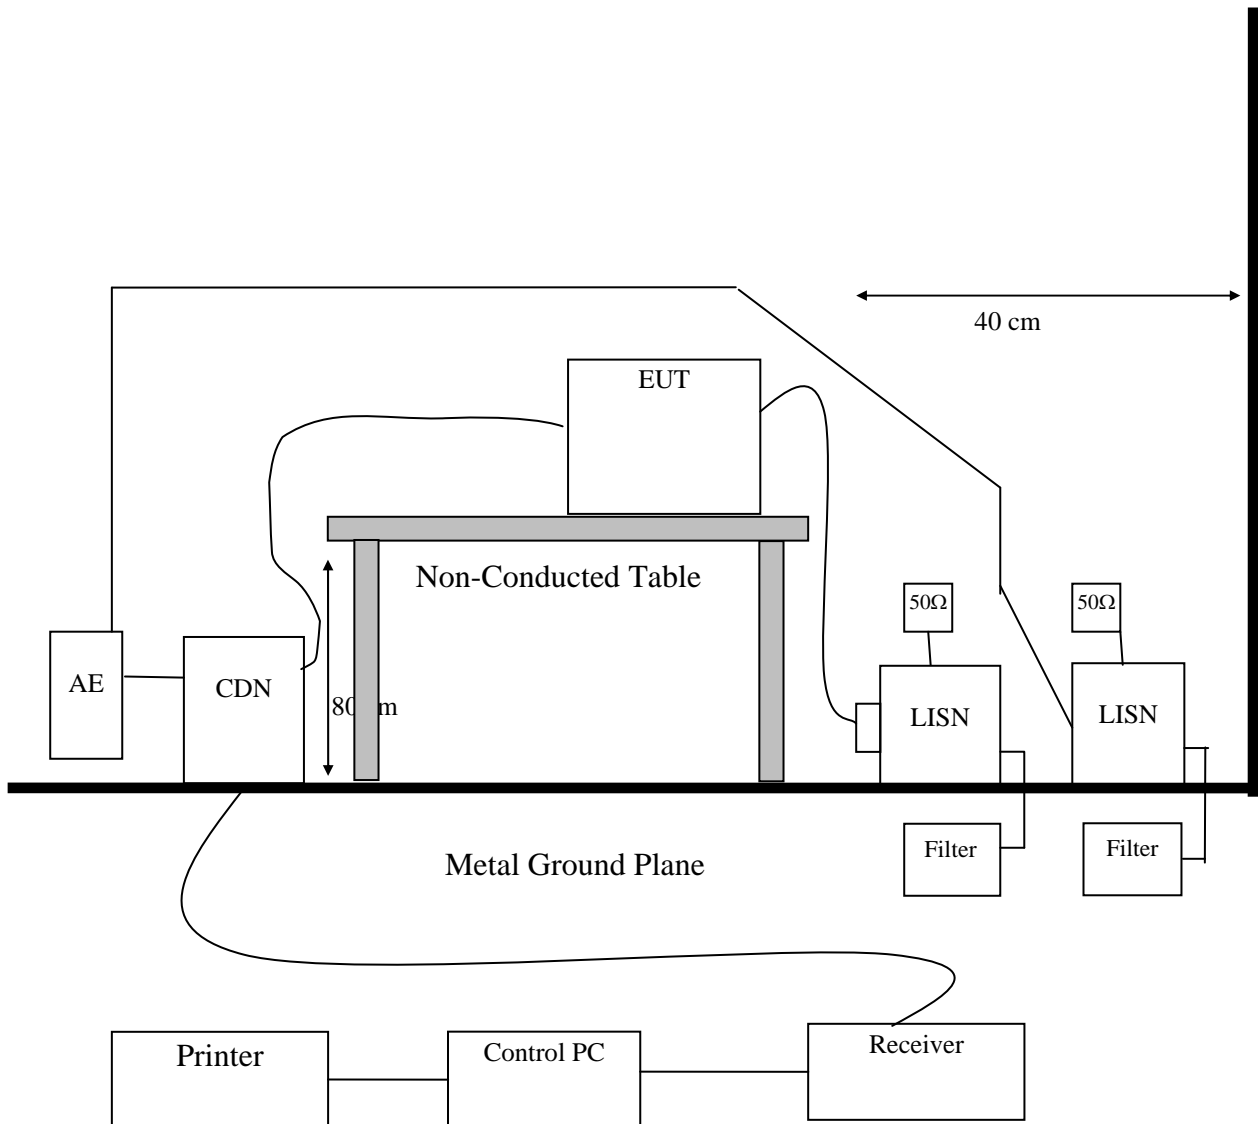

### 17.6.3 General Radiation Test Configuration

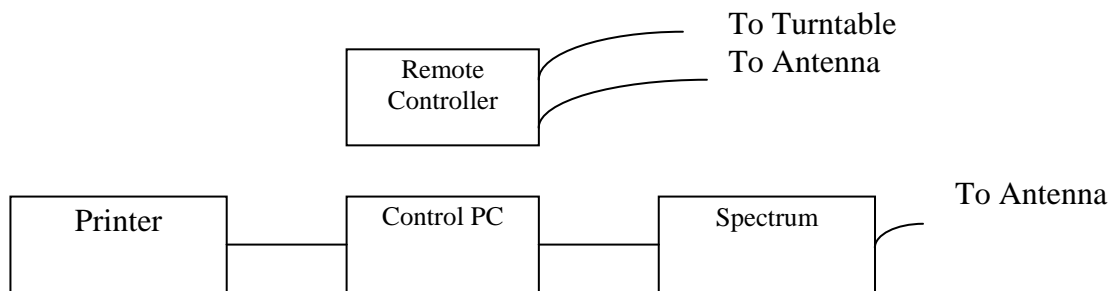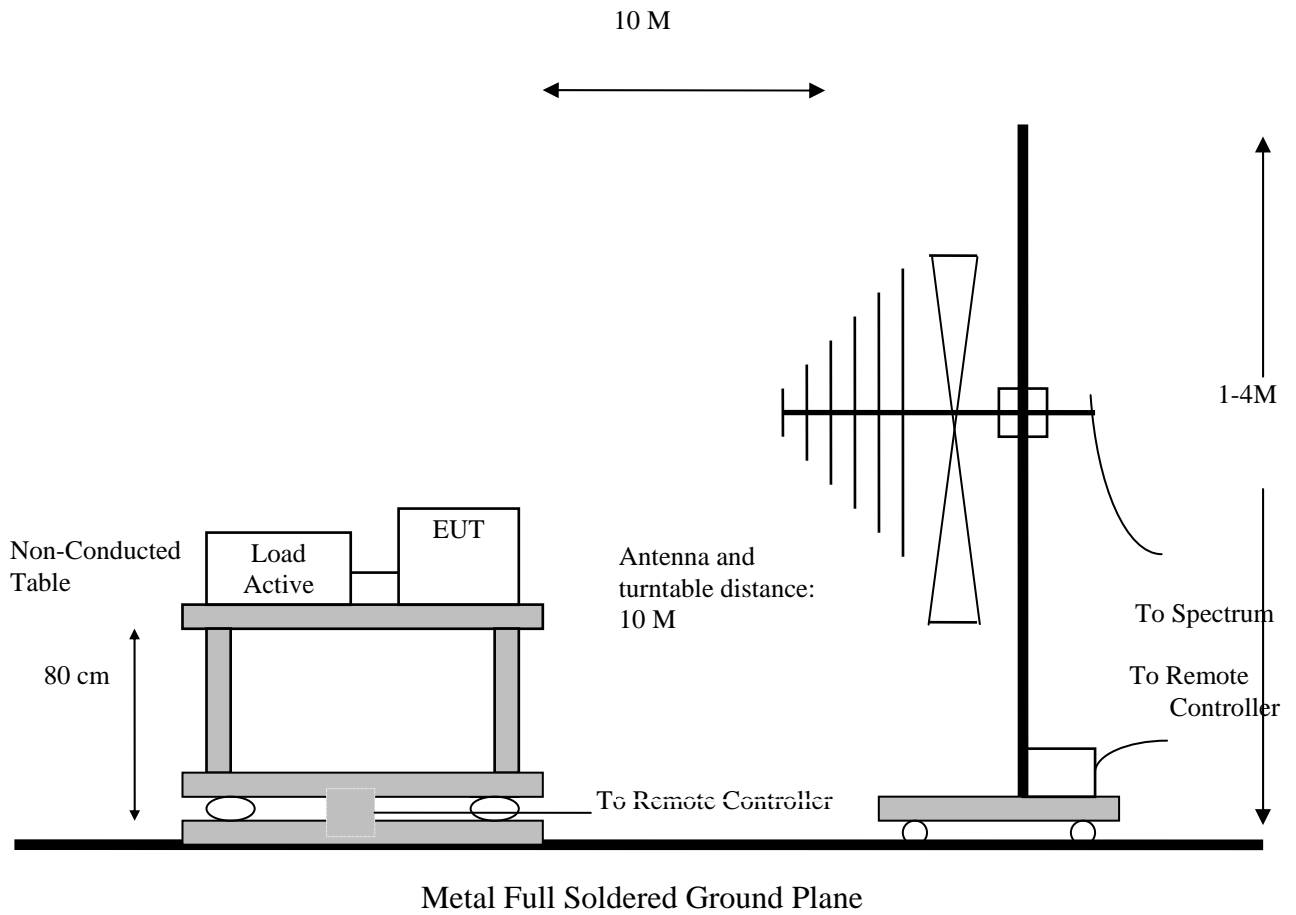

## 17.7 Appendix F: Uncertainty of Measurement

The measurement uncertainty refers to CISPR 16-4-2:2003. The coverage factor  $k = 2$  yields approximately a 95 % level of confidence.

<Conduction 01>:  $\pm 2.946\text{dB}$

<OATS 01 (10M)>  
 30MHz~1GHz:  $\pm 2.547\text{dB}$

<Immunity 01>

Test item	Uncertainty
EN61000-4-2 (ESD)	
Voltage	$\pm 1.848\%$
First Peak current	$\pm 3.233\%$
current at 30ns	$\pm 0.5\%$
current at 60ns	$\pm 0.970\%$
EN61000-4-3 (RS)	$\pm 1.776\text{dB}$
EN61000-4-4 (EFT)	
Time	$\pm 3.162\%$
Voltage	$\pm 4.624\%$
EN61000-4-5 (Surge)	
Time	$\pm 0.200\%$
Voltage	$\pm 4.041\%$
Current	$\pm 3.464\%$
EN61000-4-6 (CS)	$\pm 1.892\text{dB}$
EN61000-4-8 (Magnetic)	$\pm 0.099\%$
EN61000-4-11 (Dips)	
Time	$\pm 0.115\%$
Voltage	$\pm 4.041\%$
Current	$\pm 3.646\%$
EN61000-3-2 (Harmonics)	$\pm 0.320\%$
EN61000-3-3 (Fluctuations and Flicker)	$\pm 0.320\%$


## 17.8 Appendix G: Photographs of EUT Configuration Test Set Up

### 17.8.1 Photo of Main Power Port Conducted Emission and Telecommunication Port Conducted Emission Measurement

Front View



Back View

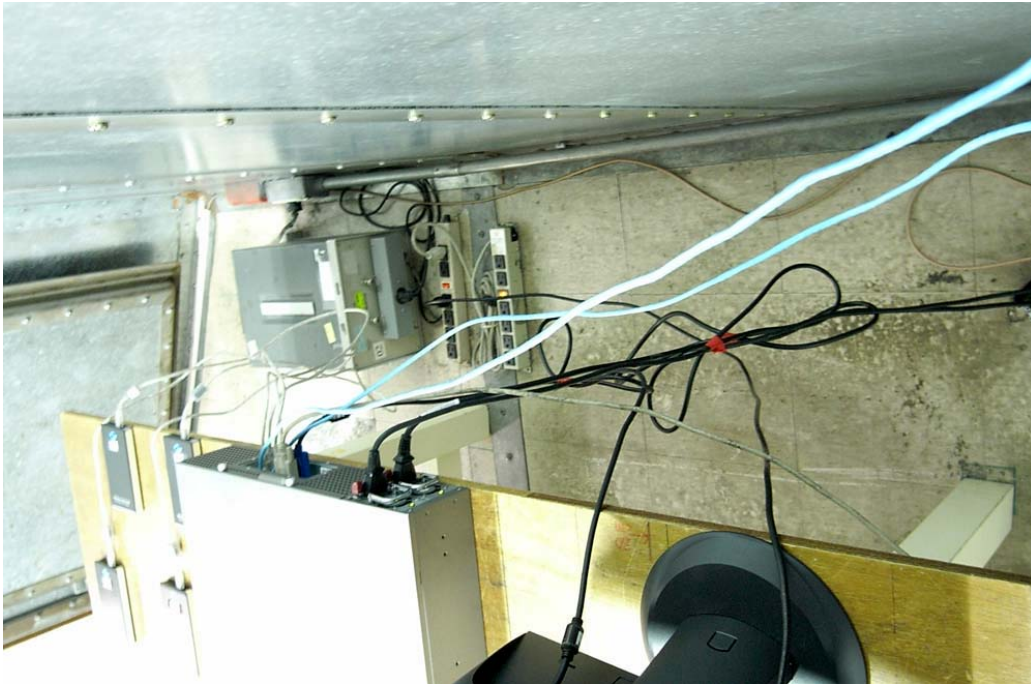

Front View




Back View




### 17.8.2 Photo of Radiated Emission Measurement

Front View

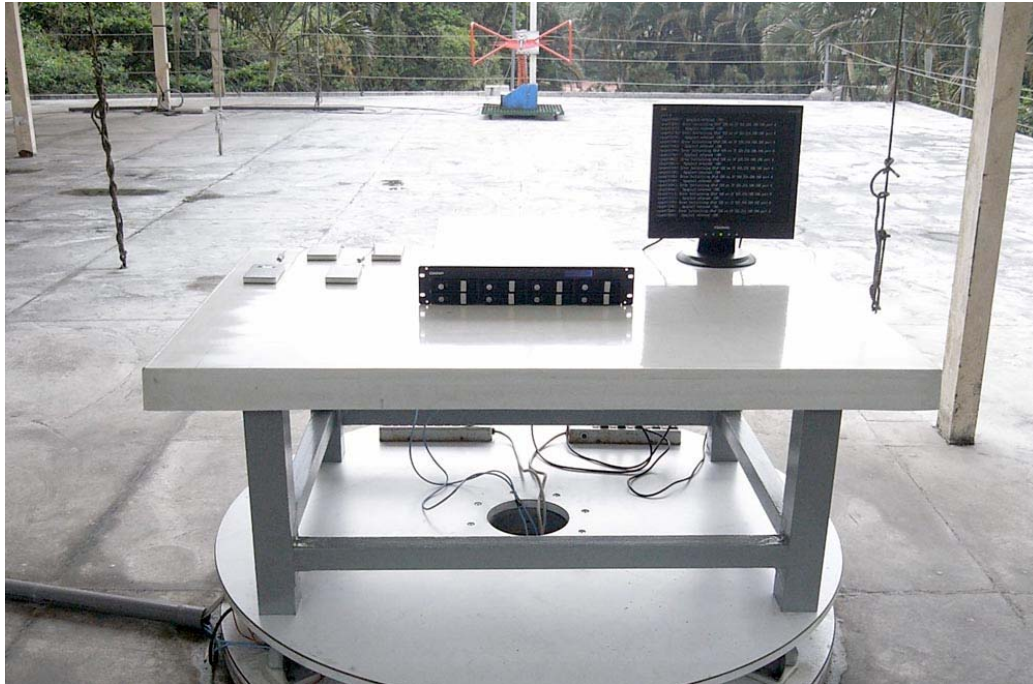

Back View

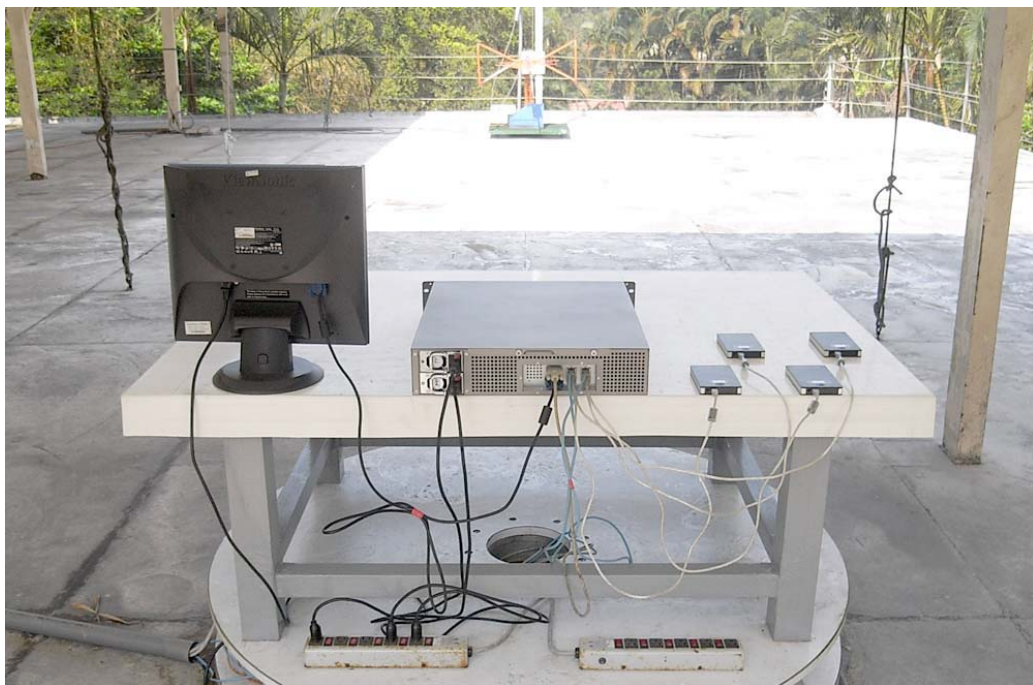




Front View




Back View




### 17.8.3 Photo of ESD Measurement

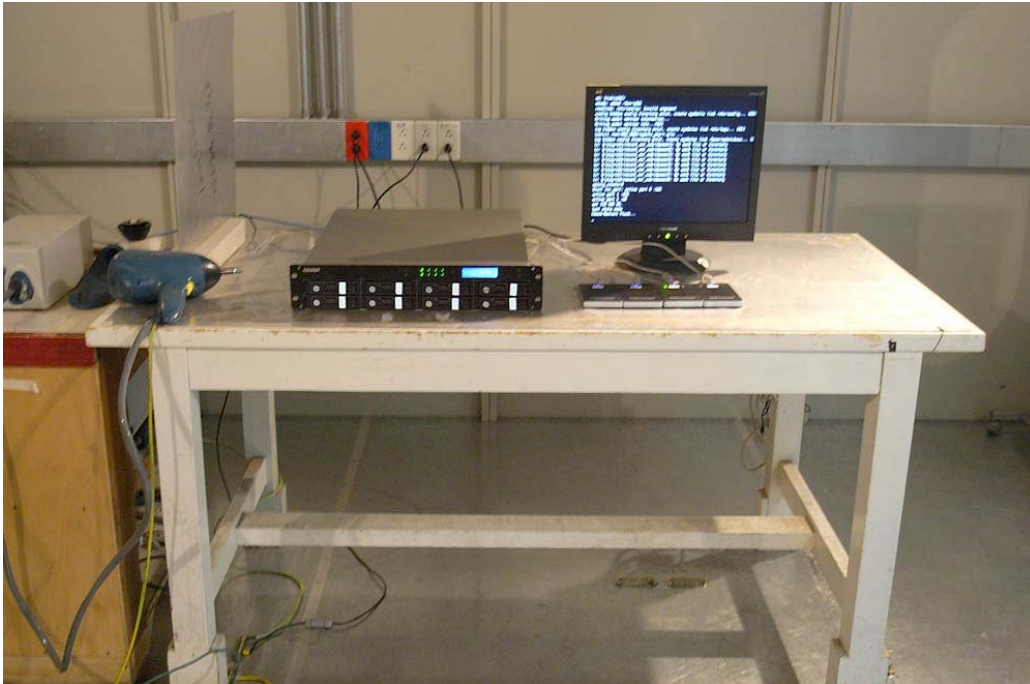

### 17.8.4 Photo of RF Field Strength Susceptibility Measurement

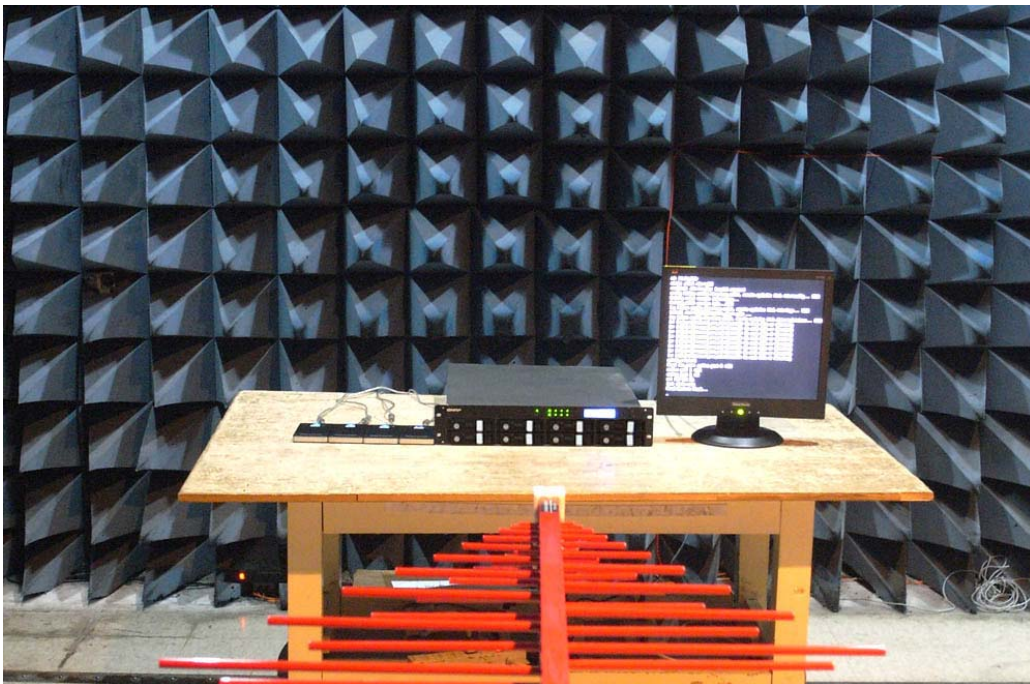


### 17.8.5 Photo of Electrical Fast Transient/Burst Measurement

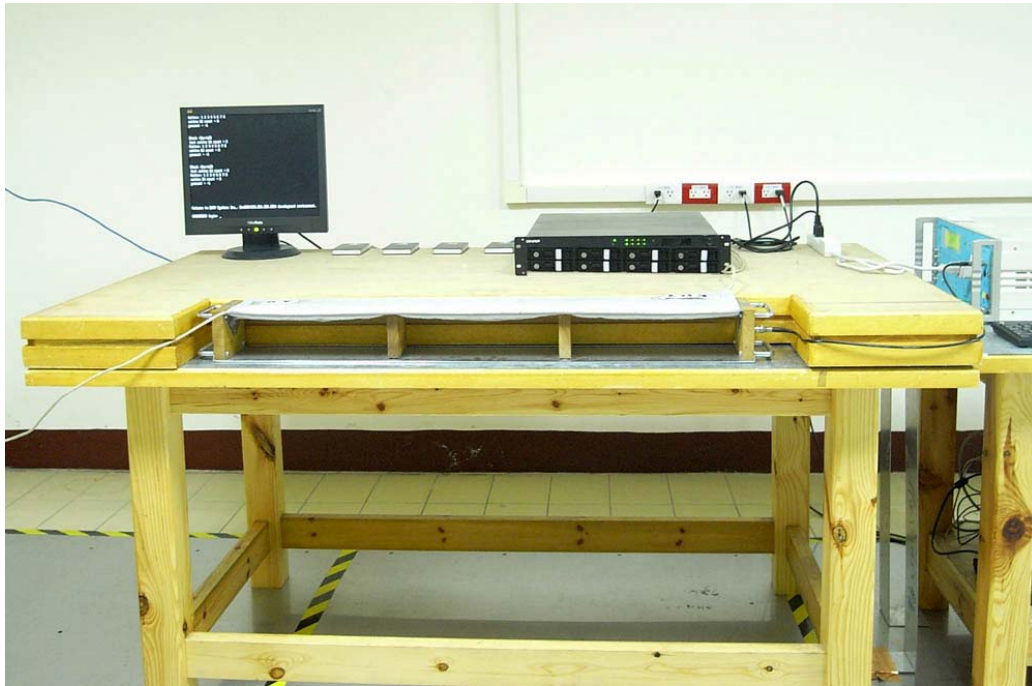


### 17.8.6 Photo of Surge Measurement




### 17.8.7 Photo of Conductive Measurement

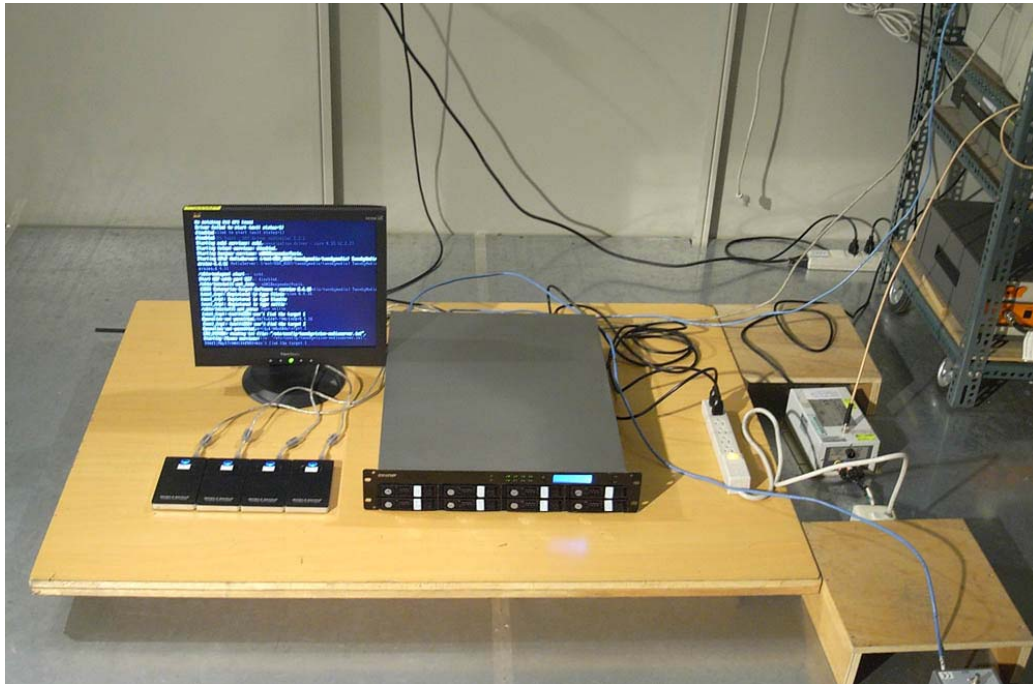

### 17.8.8 Photo of Magnetic field Measurement

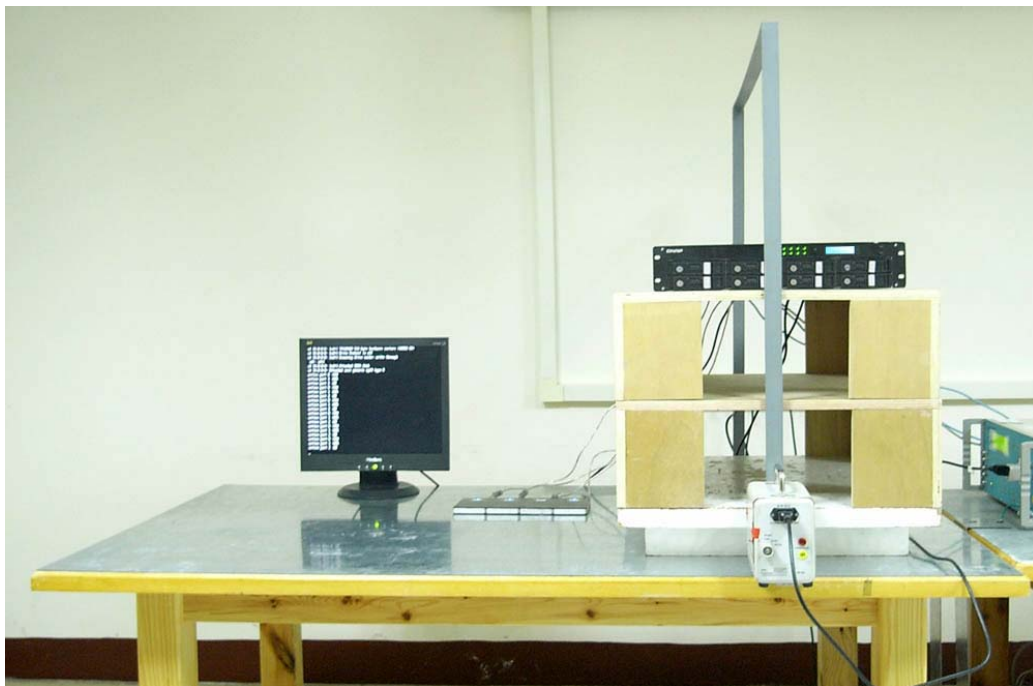

### 17.8.9 Photo of Voltage Dips Measurement

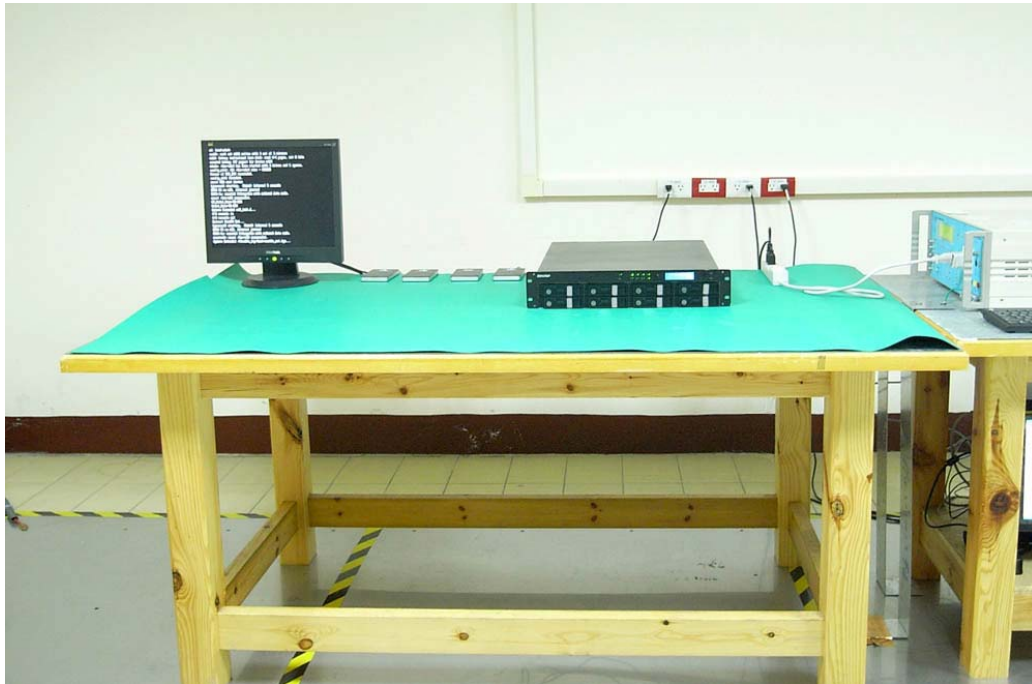

### 17.8.10 Photo of Harmonics and Voltage Fluctuations



## 17.9 Photographs of EUT

Please refer to the File of **ISL-09HE104P**

**18. Attachment:**

**Model Number(s):**

**TS-809U-RP; VioStor-8040U-RP; VioStor-8032U-RP; VioStor-8024U-RP;  
TS-809U; TS-809U-SP; TS-809U-G; TS-809U-RP-G; TS-809U-SP-G;  
VioStor-8040U-SP; VioStor-8036U-SP; VioStor-8032U-SP; VioStor-8024U-SP;  
VioStor-8036U-RP; VioStor-8040U; VioStor-8036U; VioStor-8032U;  
VioStor-8024U; NVR-8040U-SP; NVR-8036U-SP; NVR-8032U-SP;  
NVR-8024U-SP; NVR-8040U-RP; NVR-8036U-RP; NVR-8032U-RP;  
NVR-8024U-RP; NVR-8040U; NVR-8036U; NVR-8032U; NVR-8024U;  
NV-8040U-SP; NV-8036U-SP; NV-8032U-SP; NV-8024U-SP; NV-8040U-RP;  
NV-8036U-RP; NV-8032U-RP; NV-8024U-RP; NV-8040U; NV-8036U;  
NV-8032U; NV-8024U**